



Technical catalogue 2015

S800/S500

The High Performance MCB



Table of content

Overview page 0/4

S800

Ordering details page 1/1

Properties page 2/1

Technical data page 3/1

Dimensional drawings page 4/1

Approvals page 5/1

S500


Ordering details page 6/1

Properties page 7/1

Technical data page 8/1

Dimensional drawings page 9/1

Approvals page 10/1

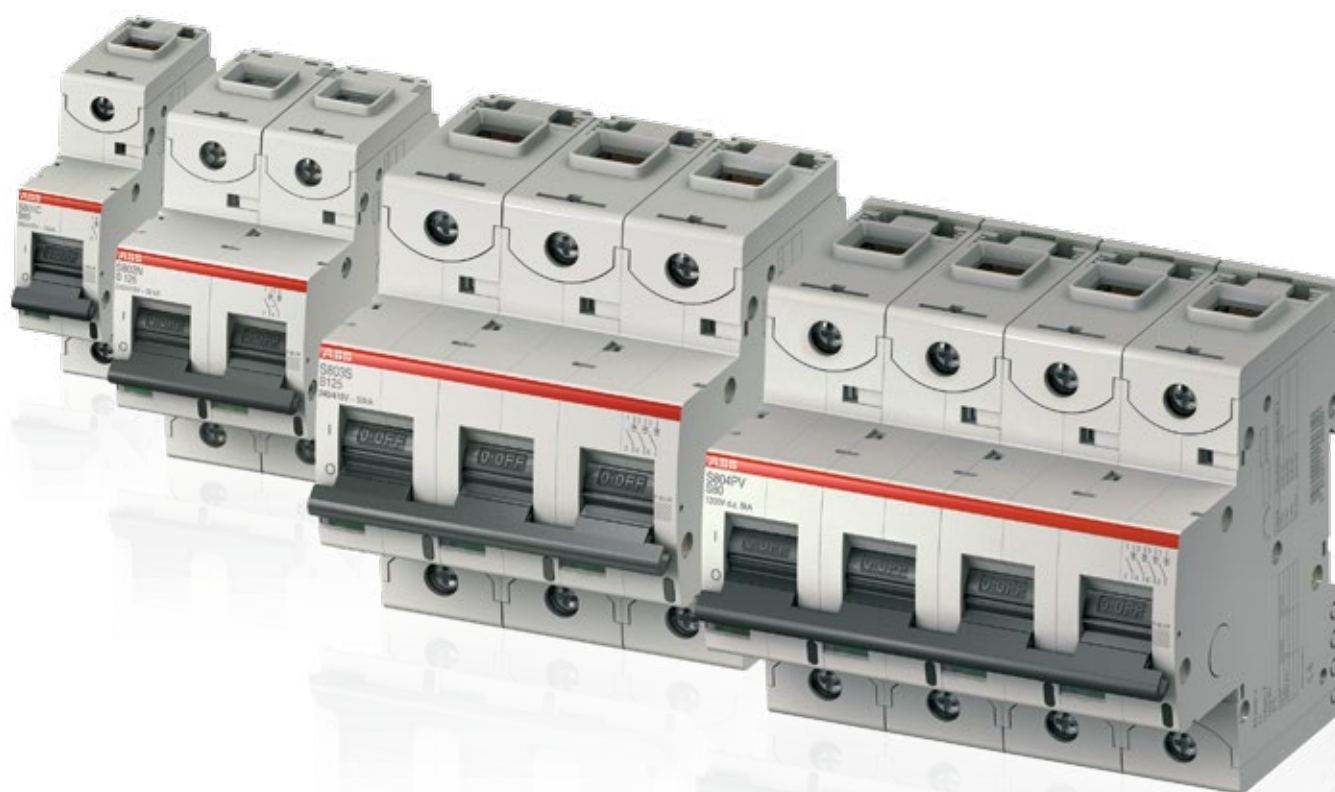

Overview S800

| Tripping characteristics | S800S B, C, D, K | S803S-KM KM | S800S-UC UCB, UCK | S800N B, C, D | S800C B, C, D, K |
|---|---|---|---|--|--|
| Standards | IEC/EN 60947-2, IEC/EN 60898-1 | IEC/EN 60947-2 | IEC/EN 60947-2 | IEC/EN 60947-2, IEC/EN 60898-1 | IEC/EN 60947-2, EN 60898-1 |
| Poles | 1 ... 4 | 3 | 1 ... 4 | 1 ... 4 | 1 ... 4 |
| Rated current I_e | A 6 ... 125 | 20 ... 80 | 10 ... 125 | 6 ... 125 | 10 ... 125 |
| Rated frequency f | Hz 50/60 | 50/60 | 50/60 | 50/60 | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V AC 690 | AC 690 | DC 1000 | AC 690 | AC 500 |
| Rated impulse withstand voltage U_{imp} (1.2/50 μ s) | kV 8 | 8 | 8 | 8 | 8 |
| Overvoltage category | IV | IV | IV | IV | IV |
| Pollution degree | 3 | 3 | 1- and 2-pole: 3 3- and 4-pole: 2 | 3 | 3 |
| Suitability for isolation | yes | yes | yes | yes | yes |
| Data acc. to IEC/EN 60898-1 | | | | | |
| Rated operational voltage U_e | V AC 230/400 | – | – | AC 230/400 | AC 230/400 |
| Rated short-circuit capacity I_{sc} | kA Char. B, C, D: 230/400 V (10 ... 80 A) = 25 kA | – | – | 230/400 V (10 ... 80 A) = 20 kA | Char. B, C, D: 230/400 V = 15 kA |
| Service short-circuit capacity I_{cs} | kA Char. B, C, D: 230/400 V (10 ... 80 A) = 12.5 kA | – | – | 230/400 V (10 ... 80 A) = 10 kA | Char. B, C, D: 230/400 V = 7.5 kA |
| Data acc. to IEC/EN 60947-2 | | | | | |
| Rated operational voltage U_e | V AC 400/690 1-pole: DC 125 2-pole: DC 250 3-pole: DC 375 4-pole: DC 500 | AC 690 | 1-pole: DC 250 2-pole: DC 500 3-pole: DC 750 4-pole (63 ... 125 A): DC 750 4-pole (10 ... 50 A): DC 1000 | AC 400/690 1-pole: DC 125 2-pole: DC 250 3-pole: DC 375 4-pole: DC 500 | AC 254/440 1-pole: DC 125 2-pole: DC 250 3-pole: DC 375 4-pole: DC 500 |
| Rated ultimate short-circuit capacity I_{cu} | kA AC 240/415 V = 50 kA AC 254/440 V = 30 kA AC 400/690 V (up to 80 A) = 6 kA AC 400/690 V (100 ... 125 A) = 4.5 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA | AC 240/415 V = 50 kA AC 254/440 V = 30 kA AC 400/690 V = 6 kA DC 375 V = 30 kA | DC 250 V (1-pole) = 50 kA DC 500 V (2-pole) = 50 kA DC 750 V (3-pole) = 50 kA DC 750 V (4-pole) (63 ... 125 A) = 50 kA DC 1000 (4-pole) (10 ... 50 A) = 50 kA | AC 240/415 V = 36 kA AC 254/440 V = 20 kA AC 400/690 V = 4.5 kA DC 125 V (1-pole) = 20 kA DC 250 V (2-pole) = 20 kA DC 375 V (3-pole) = 20 kA DC 500 V (4-pole) = 20 kA | AC 240/415 V = 25 kA AC 254/440 V = 15 kA DC 125 V (1-pole) = 10 kA DC 250 V (2-pole) = 10 kA DC 375 V (3-pole) = 10 kA DC 500 V (4-pole) = 10 kA |
| Rated service short-circuit capacity I_{cs} | kA AC 240/415 V = 40 kA AC 254/440 V (up to 80 A) = 22.5 kA AC 254/440 V (100 ... 125 A) = 15 kA AC 400/690 V (up to 80 A) = 4 kA AC 400/690 V (100 ... 125 A) = 3 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA | AC 240/415 V = 40 kA AC 254/440 V = 22.5 kA AC 400/690 V = 4 kA DC 375 V = 30 kA | DC 250 V (1-pole) = 50 kA DC 500 V (2-pole) = 50 kA DC 750 V (3-pole) = 50 kA DC 750 V (4-pole) (63 ... 125 A) = 50 kA DC 1000 (4-pole) (10 ... 50 A) = 50 kA | AC 240/415 V = 30 kA AC 254/440 V (up to 80 A) = 15 kA AC 254/440 V (100 ... 125 A) = 10 kA AC 400/690 V = 3 kA DC 125 V (1-pole) = 20 kA DC 250 V (2-pole) = 20 kA DC 375 V (3-pole) = 20 kA DC 500 V (4-pole) = 20 kA | AC 240/415 V = 18 kA AC 254/440 V = 10 kA DC 125 V (1-pole) = 10 kA DC 250 V (2-pole) = 10 kA DC 375 V (3-pole) = 10 kA DC 500 V (4-pole) = 10 kA |

Note: The minimum operating voltage for S800 is 12 VAC/VDC.

Overview S800

| | | S800B B, C, D, K | S800HV K | S800U K, Z | S804U-UCZ UCZ |
|---|----|---|---|---|--------------------------|
| Tripping characteristics | | | | | |
| Standards | | IEC 60947-2 EN 60898-1* | IEC/EN 60947-2 | UL489 IEC 60947-2 | UL489 |
| Poles | | 1 ... 4 | 1 ... 3 | 1 ... 4 | 4 |
| Rated current I_e | A | Char. B, C: 32 ... 125 Char. D, K: 32 ... 125 | 6 ... 125 | 10 – 100 | 10 – 80 |
| Rated frequency f | Hz | 50/60 | 50/60 | 50/60 | – |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 500 | AC 1000 | AC 690 | DC 1500 |
| Rated impulse withstand voltage U_{imp} (1.2/50µs) | kV | 6 | 8 | 8 | 8 |
| Overvoltage category | | III | III | IV | IV |
| Pollution degree | | 3 | 2 | 3 | 3 |
| Suitability for isolation | | yes | yes | yes | yes |
| Data acc. to IEC/EN 60898-1 | | | | | |
| Rated operational voltage U_e | V | AC 230/400 | – | – | – |
| Rated short-circuit capacity I_{cn} | kA | 230/400V = 10kA | – | – | – |
| Service short-circuit capacity I_{cs} | kA | 230/400V = 7.5kA | – | – | – |
| Data acc. to IEC/EN 60947-3 | | | | | |
| Rated operational voltage U_e | V | – | – | – | – |
| Min. operating voltage | V | – | – | – | – |
| Rated short-term withstand current I_{cw} | kA | – | – | – | – |
| Rated short-circuit making capacity I_{cm} | kA | – | – | – | – |
| Utilisation category | | – | – | – | – |
| Data acc. to IEC/EN 60947-2 | | | | | |
| Rated operational voltage U_e | V | AC 230/400 | AC 580/1000 | AC 240/415 | DC 600 |
| Rated ultimate short-circuit capacity I_{cu} | kA | AC 230/400V = 16kA DC 75V (1-pole) = 10kA DC 150V (2-pole) = 10kA DC 225V (3-pole) = 10kA DC 300V (4-pole) = 10kA | AC 580/1000 (6 ... 63 A) = 4kA (80 ... 125 A) = 3kA | 1-pole: AC 240V 30kA multipole: AC 415V 50kA | – – |
| Rated service short-circuit capacity I_{cs} | kA | AC 230/400V = 10kA | 2.5 (6 ... 63 A) 2 (80 ... 125 A) | 1-pole: AC 240V 25kA multipole: AC 415V 40kA | – |
| Data acc. to UL / CSA | | | | | |
| Rated voltage | V | | | AC 240 | DC 600 |
| Short-circuit current rating acc. to UL 489 | kA | | | 1-pole 30kA multipole: 50kA | 10kA |
| Short-circuit current rating acc. to UL 489B | kA | | | | |

* 06/2015

Overview S800PV Photovoltaic

| | S800PV-S | S800PV-M | S802PV-M-H | S804U-PVS |
|---|--|--|-------------------|--------------------------|
| Tripping characteristics | B | – | – | PVS |
| Standards | IEC / EN 60947-2 | IEC / EN 60947-3 | IEC / EN 60947-3 | UL489B (Photovoltaic) |
| Poles | 2 ... 4 | 2 ... 4 | 2 (polarized) | 4 |
| Rated current I_e | A 10 ... 125 | 32, 63, 125 | 32, 63, 100 | 5 |
| Rated frequency f | Hz – | – | – | – |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V DC 1500 | DC 1500 | DC 1500 | DC 1500 |
| Rated impulse withstand voltage U_{imp} (1.2/50µs) | kV 8 | 8 | 8 | 8 |
| Overvoltage category | III | III | III | IV |
| Pollution degree | 2 | 2 | 2 | 3 |
| Suitability for isolation | yes | yes | yes | yes |
| Data acc. to IEC/EN 60947-3 | | | | |
| Rated operational voltage U_e | V – | 2-pole: DC 800 3-pole: DC 1200 4-pole: DC 1200 | 2-pole: DC 1000 | – |
| Min. operating voltage | V – | – | – | – |
| Rated short-term withstand current I_{cw} | kA – | 1.5 | 1.5 | – |
| Rated short-circuit making capacity I_{cm} | kA – | 0.5 | 0.5 | – |
| Utilisation category | – | DC-21A | DC-21A | – |
| Data acc. to IEC/EN 60947-2 | | | | |
| Rated operational voltage U_e | V 2-pole DC 800: 10 ... 80A DC 600: 100 ... 125A 3-pole DC 1200: 10 ... 80A DC 1000: 100 ... 125A 4-pole DC 1200: 10 ... 125A | – | – | – |
| Rated ultimate short-circuit capacity I_{cu} | kA 5 | – | – | – |
| Rated service short-circuit capacity I_{cs} | kA 5 | – | – | – |
| Data acc. to UL / CSA | | | | |
| Rated voltage | V | | | DC 1000 |
| Short-circuit current rating acc. to UL 489 | kA | | | |
| Short-circuit current rating acc. to UL 489B | kA | | | 3 kA |

Overview S500

| | S500 | S500UC |
|---|--|--|
| Tripping characteristics | K | K |
| Standards | IEC/EN 60947-2 UL1077 CAN/CSA-C22.2 No. 35 | IEC/EN 60947-2 UL1077 CAN/CSA-C22.2 No. 35 |
| Poles | 1 ... 4 | 1 ... 4 |
| Rated current I_n | A 0.1 ... 45 | 0.1 ... 45 |
| Rated frequency f | Hz 50 / 60 | |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V AC 690 | DC 1000 |
| Rated impulse withstand voltage U_{imp} (1.2/50µs) | kV 6 | 6 |
| Overvoltage category | III | DC 250V: IV DC 500V: III DC 750V: II |
| Pollution degree | 3 | 3 |
| Suitability for isolation | yes | yes |
| Data acc. to IEC/EN 60898-1 | | |
| Rated operational voltage U_n | V – | – |
| Rated short-circuit capacity I_{cn} | kA – | – |
| Service short-circuit capacity I_{cs} | kA – | – |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_n | V AC 400/690 | 1-pole: DC 250 2-pole: DC 500 3-pole: DC 750 4-pole: DC 750 |
| Rated ultimate short-circuit capacity I_{cu} | kA AC 230/400V (up to 11 A) = 50 kA AC 230/400V (10 ... 45 A) = 30 kA AC 250/440V (up to 11 A) = 30 kA AC 250/440V (10 ... 45 A) = 25 kA AC 3 x 500V (up to 11 A) = 20 kA AC 3 x 500V (10 ... 45 A) = 15 kA AC 400/690V = 6 kA | 1-pole: DC 250 = 30 kA 2-pole: DC 500 = 30 kA 3-pole: DC 750 = 30 kA 4-pole: DC 750 = 30 kA |
| Rated service short-circuit capacity I_{cs} | kA AC 230/400V (up to 11 A) = 30 kA AC 230/400V (10 ... 45 A) = 25 kA AC 250/440V = 22 kA AC 3 x 500V (up to 11 A) = 15 kA AC 3 x 500V (10 ... 45 A) = 11 kA AC 400/690V = 3 kA | 1-pole: DC 250 = 30 kA 2-pole: DC 500 = 30 kA 3-pole: DC 750 = 30 kA 4-pole: DC 750 = 30 kA |
| Data acc. to UL1077 and CSA-C22.2 No. 35 | | |
| Rated operational voltage U_n | V 1-pole: AC 240 2- and 3-pole: AC 600V 1-pole: DC 250 2-pole in series: DC 500 3-pole in series: DC 600 | 1-pole: DC 250 2-pole in series: DC 500 3-pole in series: DC 600 |
| Rated short-circuit breaking capacity I_{cb} | kA AC 240V (up to 11 A) = 30 kA AC 240V (25 ... 45 A) = 18 kA AC 277V (1-pole) = 14 kA AC 450V (3-pole) = 14 kA AC 600V = 6 kA | 1-pole: DC 250 = 30 kA 2-pole: DC 500 = 30 kA 3-pole: DC 750 = 30 kA 4-pole: DC 750 = 30 kA |

Overview S500

| | | S500HV | F500 Residual current operated Circuit-Breaker with Overcurrent protection | F500 Residual current operated Circuit-Breaker with Overcurrent protection |
|--|----|----------------------|---|---|
| Tripping characteristics | | K | C, D | K |
| Standards | | IEC/EN 60947-2 | IEC/EN 60947-2 | IEC/EN 60947-2 |
| Poles | | 1 ... 3 | 2 ... 4 | 2 ... 4 |
| Rated current I_e | A | 1 ... 45 | 10 ... 63 | 0.2 ... 45 |
| Rated frequency f | Hz | 50 / 60 | 50/60 | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 1000 | AC 690 | AC 690 |
| Rated impulse withstand voltage U_{imp} (1.2/50 μ s) | kV | 6 | 6 | 6 |
| Overvoltage category | | II | | |
| Pollution degree | | 2 | 3 | 3 |
| Suitability for isolation | | yes | yes | yes |
| Data acc. to IEC/EN 60898-1 | | | | |
| Rated operational voltage U_e | V | – | – | – |
| Rated short-circuit capacity I_{cn} | kA | – | – | – |
| Service short-circuit capacity I_{cs} | kA | – | – | – |
| Data acc. to IEC/EN 60947-2 | | | | |
| Rated operational voltage U_e | V | AC 580/1000 | AC 690 | AC 690 |
| Rated ultimate short-circuit capacity I_{cu} | kA | AC 580/1000 = 1.5 kA | AC 400V = 50 kA AC 440V = 30 kA AC 3 x 500V = 15 kA AC 690V = 6 kA | AC 400V (up to 11A) = 50 kA AC 400V (10 ... 45A) = 30 kA AC 440V (up to 11A) = 30 kA AC 440V (10 ... 45A) = 25 kA AC 3 x 500V (up to 11A) = 20 kA AC 3 x 500V (10 ... 45A) = 15 kA AC 690V = 6 kA |
| Rated service short-circuit capacity I_{cs} | kA | AC 580/1000 = 1.5 kA | AC 400V = 25 kA AC 440V = 22 kA AC 3 x 500V = 11 kA AC 690V = 3 kA | AC 400V (up to 11A) = 30 kA AC 400V (10 ... 45A) = 25 kA AC 440V = 22 kA AC 3 x 500V (up to 11A) = 15 kA AC 3 x 500V (10 ... 45A) = 11 kA AC 690V = 3 kA |
| Data acc. to UL1077 and CSA-C22.2 No. 35 | | | | |
| Rated operational voltage U_e | V | – | – | – |
| Rated short-circuit breaking capacity I_{cc} | kA | – | – | – |

Applications

The range of applications of the S800 and S500 high performance circuit breakers is extremely varied: from building and marine installations, industry, transport and renewable energies to uninterrupted power supply. The S800 and S500 high performance circuit breakers are reliable switches: rated ultimate short-circuit breaking capacity up to 50 kA, adjust-

able or fixed rated tripping current, current rating up to 125 A, the most varied of characteristics and much more.

The S800 and S500 are flexible, yet at the same time meet the highest safety requirements. See the variety for yourself!



Building installation



Transport



Industry



Renewable energy

New Products

CMS (Current Measurement Sensor) for S800

Simple and flexible assembling


The CMS is a multichannel current measurement system for branch monitoring of alternating (AC) and direct (DC) currents up to 160 A. Various sensor types allow the mounting in every installation environment.

Advantages

- A sensor for all types of current
- Minimal space requirements
- Simple installation
- Always retrofitted and expanded

Overview

PC/ PLC for processing and visualization of the measurement values

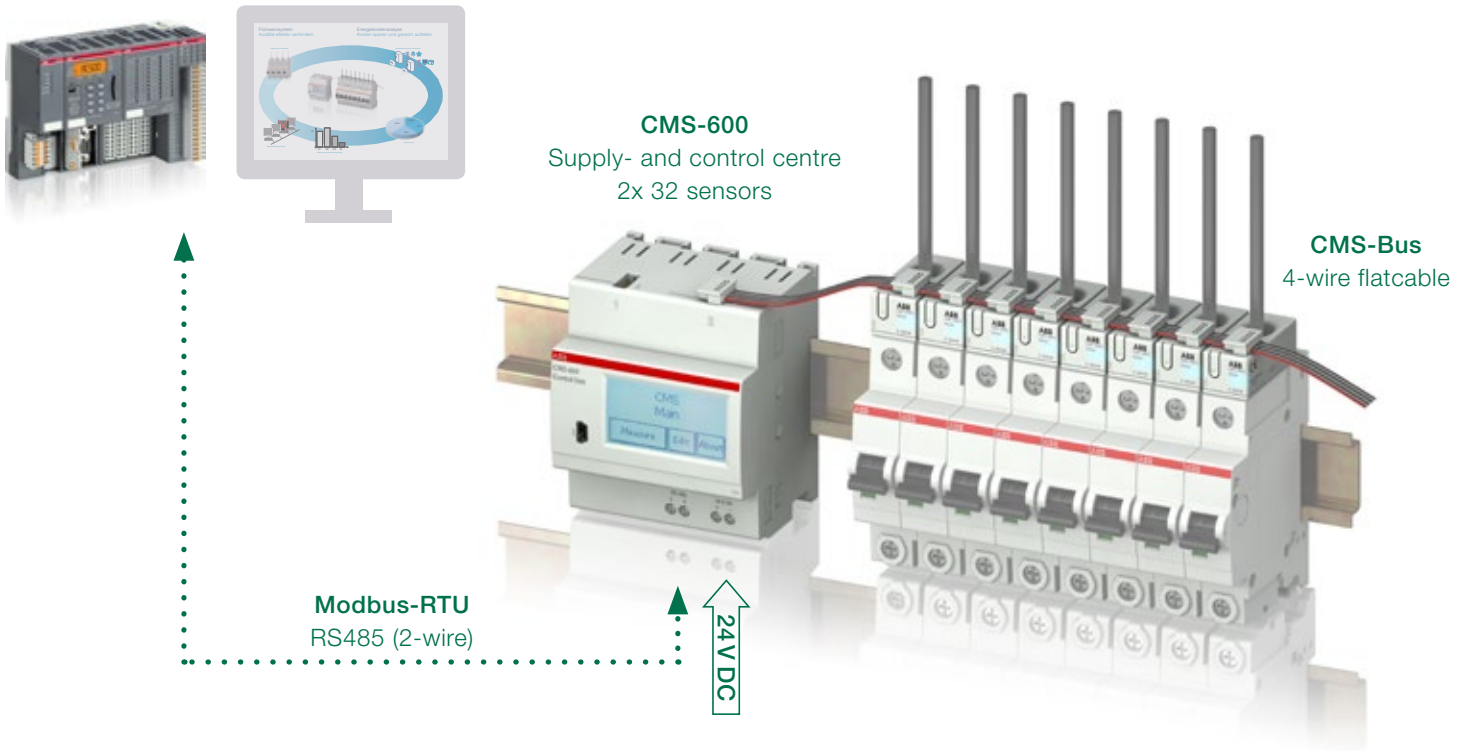

New Products

Pole connector S802-LINK



ZCCCH13377F001

Circuit breakers used to protect photovoltaic equipment are exposed to high ambient temperatures during operation and they have to withstand high temperatures up to 50 °C or more. When a circuit breaker with rated current of 125 A is used, roughly 50 % of heat generated by the current is dispersed through the conductors or wires which are connected via the terminals to the breaker as well as the incoming and outgoing.

If the incoming conductors or wires, which are located in the upper part of the circuit breaker, are eliminated and replaced by a short wire, in form of an electrical bridge, there is no possibility to take out the heat generated in the circuit breaker and this can result in overheating of the breaker. Due to the high ambient temperatures, the excessive amount of heat generated in circuit breakers can lead to a considerable increase in the combiner's box temperature and this can lead to malfunction i.e. early tripping of the MCB or even overheating the MCB.

The link connector is an evolutionary form of electric connector, which is capable to dissipate the heat generated, and improves significantly the thermal conditions of the application. The pole connector dissipates the heat by natural convection, and because of its dielectric strength it is safe even if it is touched.

Advantages of the pole connector

- Avoid hazardous situation due to high temperatures in demanding applications
- Avoid early tripping of the MCB
- Reduce heat dissipation of the MCBs in the box with significant temperature reduction
- Small dimensions fit in every box
- Rated current range of 50 A and 125 A used in 2-pole and 4-pole-breakers
- Avoid isolation damage by excessive bent of the cable (not following cable manufacturer limits)

Table of content S800

| | |
|-------------|------|
| S800S-B | 1/2 |
| S800S-C | 1/4 |
| S800S-D | 1/6 |
| S800S-K | 1/8 |
| S803S-KM | 1/10 |
| S800S-UCB | 1/11 |
| S800S-UCK | 1/12 |
| S800N-B | 1/13 |
| S800N-C | 1/15 |
| S800N-D | 1/17 |
| S800C-B | 1/19 |
| S800C-C | 1/20 |
| S800C-D | 1/21 |
| S800C-K | 1/22 |
| S800B-B | 1/23 |
| S800B-C | 1/24 |
| S800B-D | 1/25 |
| S800B-K | 1/26 |
| S800HV-K | 1/27 |
| S800U-K | 1/28 |
| S800U-Z | 1/29 |
| S804U-UCZ | 1/30 |
| S800PV-S | 1/31 |
| S800PV-M | 1/32 |
| S802PV-M-H | 1/33 |
| S804U-PVS | 1/34 |
| Accessories | 1/35 |

S800S-B Characteristic B

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CCS413001R0002



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S801S-B6 | 2CCS861001R0065 | 408107 | 0.24 | 1 |
| 50 | 8 | S801S-B8 | 2CCS861001R0085 | 411329 | 0.24 | 1 |
| 50 | 10 | S801S-B10 | 2CCS861001R0105 | 200008 | 0.24 | 1 |
| 50 | 13 | S801S-B13 | 2CCS861001R0135 | 200015 | 0.24 | 1 |
| 50 | 16 | S801S-B16 | 2CCS861001R0165 | 200022 | 0.24 | 1 |
| 50 | 20 | S801S-B20 | 2CCS861001R0205 | 200039 | 0.24 | 1 |
| 50 | 25 | S801S-B25 | 2CCS861001R0255 | 200046 | 0.24 | 1 |
| 50 | 32 | S801S-B32 | 2CCS861001R0325 | 200053 | 0.24 | 1 |
| 50 | 40 | S801S-B40 | 2CCS861001R0405 | 200060 | 0.24 | 1 |
| 50 | 50 | S801S-B50 | 2CCS861001R0505 | 200077 | 0.24 | 1 |
| 50 | 63 | S801S-B63 | 2CCS861001R0635 | 200084 | 0.24 | 1 |
| 50 | 80 | S801S-B80 | 2CCS861001R0805 | 200091 | 0.24 | 1 |
| 50 | 100 | S801S-B100 | 2CCS861001R0825 | 200107 | 0.24 | 1 |
| 50 | 125 | S801S-B125 | 2CCS861001R0845 | 200114 | 0.24 | 1 |



2CCS413020R0002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S802S-B6 | 2CCS862001R0065 | 408114 | 0.49 | 1 |
| 50 | 8 | S802S-B8 | 2CCS862001R0085 | 411336 | 0.49 | 1 |
| 50 | 10 | S802S-B10 | 2CCS862001R0105 | 200121 | 0.49 | 1 |
| 50 | 13 | S802S-B13 | 2CCS862001R0135 | 200138 | 0.49 | 1 |
| 50 | 16 | S802S-B16 | 2CCS862001R0165 | 200145 | 0.49 | 1 |
| 50 | 20 | S802S-B20 | 2CCS862001R0205 | 200152 | 0.49 | 1 |
| 50 | 25 | S802S-B25 | 2CCS862001R0255 | 200169 | 0.49 | 1 |
| 50 | 32 | S802S-B32 | 2CCS862001R0325 | 200176 | 0.49 | 1 |
| 50 | 40 | S802S-B40 | 2CCS862001R0405 | 200183 | 0.49 | 1 |
| 50 | 50 | S802S-B50 | 2CCS862001R0505 | 200190 | 0.49 | 1 |
| 50 | 63 | S802S-B63 | 2CCS862001R0635 | 200206 | 0.49 | 1 |
| 50 | 80 | S802S-B80 | 2CCS862001R0805 | 200213 | 0.49 | 1 |
| 50 | 100 | S802S-B100 | 2CCS862001R0825 | 200220 | 0.49 | 1 |
| 50 | 125 | S802S-B125 | 2CCS862001R0845 | 200237 | 0.49 | 1 |



2CCS413030R0002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S803S-B6 | 2CCS863001R0065 | 408121 | 0.74 | 1 |
| 50 | 8 | S803S-B8 | 2CCS863001R0085 | 411343 | 0.74 | 1 |
| 50 | 10 | S803S-B10 | 2CCS863001R0105 | 200244 | 0.74 | 1 |
| 50 | 13 | S803S-B13 | 2CCS863001R0135 | 200251 | 0.74 | 1 |
| 50 | 16 | S803S-B16 | 2CCS863001R0165 | 200268 | 0.74 | 1 |
| 50 | 20 | S803S-B20 | 2CCS863001R0205 | 200275 | 0.74 | 1 |
| 50 | 25 | S803S-B25 | 2CCS863001R0255 | 200282 | 0.74 | 1 |
| 50 | 32 | S803S-B32 | 2CCS863001R0325 | 200299 | 0.74 | 1 |
| 50 | 40 | S803S-B40 | 2CCS863001R0405 | 200305 | 0.74 | 1 |
| 50 | 50 | S803S-B50 | 2CCS863001R0505 | 200312 | 0.74 | 1 |
| 50 | 63 | S803S-B63 | 2CCS863001R0635 | 200329 | 0.74 | 1 |
| 50 | 80 | S803S-B80 | 2CCS863001R0805 | 200336 | 0.74 | 1 |
| 50 | 100 | S803S-B100 | 2CCS863001R0825 | 200343 | 0.74 | 1 |
| 50 | 125 | S803S-B125 | 2CCS863001R0845 | 200350 | 0.74 | 1 |

S800S-B Characteristic B

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CCS41304R0002



| I_{CU} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S804S-B6 | 2CCS864001R0065 | 408138 | 0.98 | 1 |
| 50 | 8 | S804S-B8 | 2CCS864001R0085 | 411350 | 0.98 | 1 |
| 50 | 10 | S804S-B10 | 2CCS864001R0105 | 200367 | 0.98 | 1 |
| 50 | 13 | S804S-B13 | 2CCS864001R0135 | 200374 | 0.98 | 1 |
| 50 | 16 | S804S-B16 | 2CCS864001R0165 | 200381 | 0.98 | 1 |
| 50 | 20 | S804S-B20 | 2CCS864001R0205 | 200398 | 0.98 | 1 |
| 50 | 25 | S804S-B25 | 2CCS864001R0255 | 200404 | 0.98 | 1 |
| 50 | 32 | S804S-B32 | 2CCS864001R0325 | 200411 | 0.98 | 1 |
| 50 | 40 | S804S-B40 | 2CCS864001R0405 | 200428 | 0.98 | 1 |
| 50 | 50 | S804S-B50 | 2CCS864001R0505 | 200435 | 0.98 | 1 |
| 50 | 63 | S804S-B63 | 2CCS864001R0635 | 200442 | 0.98 | 1 |
| 50 | 80 | S804S-B80 | 2CCS864001R0805 | 200459 | 0.98 | 1 |
| 50 | 100 | S804S-B100 | 2CCS864001R0825 | 200466 | 0.98 | 1 |
| 50 | 125 | S804S-B125 | 2CCS864001R0845 | 200473 | 0.98 | 1 |

1

S800S-C Characteristic C

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CCS413005F002



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S801S-C6 | 2CCS861001R0064 | 408145 | 0.24 | 1 |
| 50 | 8 | S801S-C8 | 2CCS861001R0084 | 411367 | 0.24 | 1 |
| 50 | 10 | S801S-C10 | 2CCS861001R0104 | 200480 | 0.24 | 1 |
| 50 | 13 | S801S-C13 | 2CCS861001R0134 | 200497 | 0.24 | 1 |
| 50 | 16 | S801S-C16 | 2CCS861001R0164 | 200503 | 0.24 | 1 |
| 50 | 20 | S801S-C20 | 2CCS861001R0204 | 200510 | 0.24 | 1 |
| 50 | 25 | S801S-C25 | 2CCS861001R0254 | 200527 | 0.24 | 1 |
| 50 | 32 | S801S-C32 | 2CCS861001R0324 | 200534 | 0.24 | 1 |
| 50 | 40 | S801S-C40 | 2CCS861001R0404 | 200541 | 0.24 | 1 |
| 50 | 50 | S801S-C50 | 2CCS861001R0504 | 200558 | 0.24 | 1 |
| 50 | 63 | S801S-C63 | 2CCS861001R0634 | 200565 | 0.24 | 1 |
| 50 | 80 | S801S-C80 | 2CCS861001R0804 | 200572 | 0.24 | 1 |
| 50 | 100 | S801S-C100 | 2CCS861001R0824 | 200589 | 0.24 | 1 |
| 50 | 125 | S801S-C125 | 2CCS861001R0844 | 200596 | 0.24 | 1 |



2CCS413006F002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S802S-C6 | 2CCS862001R0064 | 408152 | 0.49 | 1 |
| 50 | 8 | S802S-C8 | 2CCS862001R0084 | 411374 | 0.49 | 1 |
| 50 | 10 | S802S-C10 | 2CCS862001R0104 | 200602 | 0.49 | 1 |
| 50 | 13 | S802S-C13 | 2CCS862001R0134 | 200619 | 0.49 | 1 |
| 50 | 16 | S802S-C16 | 2CCS862001R0164 | 200626 | 0.49 | 1 |
| 50 | 20 | S802S-C20 | 2CCS862001R0204 | 200633 | 0.49 | 1 |
| 50 | 25 | S802S-C25 | 2CCS862001R0254 | 200640 | 0.49 | 1 |
| 50 | 32 | S802S-C32 | 2CCS862001R0324 | 200657 | 0.49 | 1 |
| 50 | 40 | S802S-C40 | 2CCS862001R0404 | 200664 | 0.49 | 1 |
| 50 | 50 | S802S-C50 | 2CCS862001R0504 | 200671 | 0.49 | 1 |
| 50 | 63 | S802S-C63 | 2CCS862001R0634 | 200688 | 0.49 | 1 |
| 50 | 80 | S802S-C80 | 2CCS862001R0804 | 200695 | 0.49 | 1 |
| 50 | 100 | S802S-C100 | 2CCS862001R0824 | 200701 | 0.49 | 1 |
| 50 | 125 | S802S-C125 | 2CCS862001R0844 | 200718 | 0.49 | 1 |



2CCS413007F002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S803S-C6 | 2CCS863001R0064 | 408169 | 0.74 | 1 |
| 50 | 8 | S803S-C8 | 2CCS863001R0084 | 411381 | 0.74 | 1 |
| 50 | 10 | S803S-C10 | 2CCS863001R0104 | 200725 | 0.74 | 1 |
| 50 | 13 | S803S-C13 | 2CCS863001R0134 | 200732 | 0.74 | 1 |
| 50 | 16 | S803S-C16 | 2CCS863001R0164 | 200749 | 0.74 | 1 |
| 50 | 20 | S803S-C20 | 2CCS863001R0204 | 200756 | 0.74 | 1 |
| 50 | 25 | S803S-C25 | 2CCS863001R0254 | 200763 | 0.74 | 1 |
| 50 | 32 | S803S-C32 | 2CCS863001R0324 | 200770 | 0.74 | 1 |
| 50 | 40 | S803S-C40 | 2CCS863001R0404 | 200787 | 0.74 | 1 |
| 50 | 50 | S803S-C50 | 2CCS863001R0504 | 200794 | 0.74 | 1 |
| 50 | 63 | S803S-C63 | 2CCS863001R0634 | 200800 | 0.74 | 1 |
| 50 | 80 | S803S-C80 | 2CCS863001R0804 | 200817 | 0.74 | 1 |
| 50 | 100 | S803S-C100 | 2CCS863001R0824 | 200824 | 0.74 | 1 |
| 50 | 125 | S803S-C125 | 2CCS863001R0844 | 200831 | 0.74 | 1 |

S800S-C Characteristic C

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CCS864001R0064



| I_{CU} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S804S-C6 | 2CCS864001R0064 | 408176 | 0.98 | 1 |
| 50 | 8 | S804S-C8 | 2CCS864001R0084 | 411398 | 0.98 | 1 |
| 50 | 10 | S804S-C10 | 2CCS864001R0104 | 200848 | 0.98 | 1 |
| 50 | 13 | S804S-C13 | 2CCS864001R0134 | 200855 | 0.98 | 1 |
| 50 | 16 | S804S-C16 | 2CCS864001R0164 | 200862 | 0.98 | 1 |
| 50 | 20 | S804S-C20 | 2CCS864001R0204 | 200879 | 0.98 | 1 |
| 50 | 25 | S804S-C25 | 2CCS864001R0254 | 200886 | 0.98 | 1 |
| 50 | 32 | S804S-C32 | 2CCS864001R0324 | 200893 | 0.98 | 1 |
| 50 | 40 | S804S-C40 | 2CCS864001R0404 | 200909 | 0.98 | 1 |
| 50 | 50 | S804S-C50 | 2CCS864001R0504 | 200916 | 0.98 | 1 |
| 50 | 63 | S804S-C63 | 2CCS864001R0634 | 200923 | 0.98 | 1 |
| 50 | 80 | S804S-C80 | 2CCS864001R0804 | 200930 | 0.98 | 1 |
| 50 | 100 | S804S-C100 | 2CCS864001R0824 | 200947 | 0.98 | 1 |
| 50 | 125 | S804S-C125 | 2CCS864001R0844 | 200954 | 0.98 | 1 |

S800S-D Characteristic D

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CC0413009F0002



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S801S-D6 | 2CCS861001R0061 | 408183 | 0.24 | 1 |
| 50 | 8 | S801S-D8 | 2CCS861001R0081 | 411404 | 0.24 | 1 |
| 50 | 10 | S801S-D10 | 2CCS861001R0101 | 200961 | 0.24 | 1 |
| 50 | 13 | S801S-D13 | 2CCS861001R0131 | 200978 | 0.24 | 1 |
| 50 | 16 | S801S-D16 | 2CCS861001R0161 | 200985 | 0.24 | 1 |
| 50 | 20 | S801S-D20 | 2CCS861001R0201 | 200992 | 0.24 | 1 |
| 50 | 25 | S801S-D25 | 2CCS861001R0251 | 201005 | 0.24 | 1 |
| 50 | 32 | S801S-D32 | 2CCS861001R0321 | 201012 | 0.24 | 1 |
| 50 | 40 | S801S-D40 | 2CCS861001R0401 | 201029 | 0.24 | 1 |
| 50 | 50 | S801S-D50 | 2CCS861001R0501 | 201036 | 0.24 | 1 |
| 50 | 63 | S801S-D63 | 2CCS861001R0631 | 201043 | 0.24 | 1 |
| 50 | 80 | S801S-D80 | 2CCS861001R0801 | 201050 | 0.24 | 1 |
| 50 | 100 | S801S-D100 | 2CCS861001R0821 | 201067 | 0.24 | 1 |
| 50 | 125 | S801S-D125 | 2CCS861001R0841 | 201074 | 0.24 | 1 |



2CC0413010F0002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S802S-D6 | 2CCS862001R0061 | 408190 | 0.49 | 1 |
| 50 | 8 | S802S-D8 | 2CCS862001R0081 | 411411 | 0.49 | 1 |
| 50 | 10 | S802S-D10 | 2CCS862001R0101 | 201081 | 0.49 | 1 |
| 50 | 13 | S802S-D13 | 2CCS862001R0131 | 201098 | 0.49 | 1 |
| 50 | 16 | S802S-D16 | 2CCS862001R0161 | 201104 | 0.49 | 1 |
| 50 | 20 | S802S-D20 | 2CCS862001R0201 | 201111 | 0.49 | 1 |
| 50 | 25 | S802S-D25 | 2CCS862001R0251 | 201128 | 0.49 | 1 |
| 50 | 32 | S802S-D32 | 2CCS862001R0321 | 201135 | 0.49 | 1 |
| 50 | 40 | S802S-D40 | 2CCS862001R0401 | 201142 | 0.49 | 1 |
| 50 | 50 | S802S-D50 | 2CCS862001R0501 | 201159 | 0.49 | 1 |
| 50 | 63 | S802S-D63 | 2CCS862001R0631 | 201166 | 0.49 | 1 |
| 50 | 80 | S802S-D80 | 2CCS862001R0801 | 201173 | 0.49 | 1 |
| 50 | 100 | S802S-D100 | 2CCS862001R0821 | 201180 | 0.49 | 1 |
| 50 | 125 | S802S-D125 | 2CCS862001R0841 | 201197 | 0.49 | 1 |



2CC0413011F0002



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S803S-D6 | 2CCS863001R0061 | 408206 | 0.74 | 1 |
| 50 | 8 | S803S-D8 | 2CCS863001R0081 | 411428 | 0.74 | 1 |
| 50 | 10 | S803S-D10 | 2CCS863001R0101 | 201203 | 0.74 | 1 |
| 50 | 13 | S803S-D13 | 2CCS863001R0131 | 201210 | 0.74 | 1 |
| 50 | 16 | S803S-D16 | 2CCS863001R0161 | 201227 | 0.74 | 1 |
| 50 | 20 | S803S-D20 | 2CCS863001R0201 | 201234 | 0.74 | 1 |
| 50 | 25 | S803S-D25 | 2CCS863001R0251 | 201241 | 0.74 | 1 |
| 50 | 32 | S803S-D32 | 2CCS863001R0321 | 201258 | 0.74 | 1 |
| 50 | 40 | S803S-D40 | 2CCS863001R0401 | 201265 | 0.74 | 1 |
| 50 | 50 | S803S-D50 | 2CCS863001R0501 | 201272 | 0.74 | 1 |
| 50 | 63 | S803S-D63 | 2CCS863001R0631 | 201289 | 0.74 | 1 |
| 50 | 80 | S803S-D80 | 2CCS863001R0801 | 201296 | 0.74 | 1 |
| 50 | 100 | S803S-D100 | 2CCS863001R0821 | 201302 | 0.74 | 1 |
| 50 | 125 | S803S-D125 | 2CCS863001R0841 | 201319 | 0.74 | 1 |

S800S-D Characteristic D

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CC0413012R0002

| I_{CU} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S804S-D6 | 2CCS864001R0061 | 408213 | 0.98 | 1 |
| 50 | 8 | S804S-D8 | 2CCS864001R0081 | 411435 | 0.98 | 1 |
| 50 | 10 | S804S-D10 | 2CCS864001R0101 | 201326 | 0.98 | 1 |
| 50 | 13 | S804S-D13 | 2CCS864001R0131 | 201333 | 0.98 | 1 |
| 50 | 16 | S804S-D16 | 2CCS864001R0161 | 201340 | 0.98 | 1 |
| 50 | 20 | S804S-D20 | 2CCS864001R0201 | 201357 | 0.98 | 1 |
| 50 | 25 | S804S-D25 | 2CCS864001R0251 | 201364 | 0.98 | 1 |
| 50 | 32 | S804S-D32 | 2CCS864001R0321 | 201371 | 0.98 | 1 |
| 50 | 40 | S804S-D40 | 2CCS864001R0401 | 201388 | 0.98 | 1 |
| 50 | 50 | S804S-D50 | 2CCS864001R0501 | 201395 | 0.98 | 1 |
| 50 | 63 | S804S-D63 | 2CCS864001R0631 | 201401 | 0.98 | 1 |
| 50 | 80 | S804S-D80 | 2CCS864001R0801 | 201418 | 0.98 | 1 |
| 50 | 100 | S804S-D100 | 2CCS864001R0821 | 201425 | 0.98 | 1 |
| 50 | 125 | S804S-D125 | 2CCS864001R0841 | 201432 | 0.98 | 1 |

S800S-K Characteristic K

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CCS413019F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S801S-K6 | 2CCS861001R0067 | 408220 | 0.24 | 1 |
| 50 | 8 | S801S-K8 | 2CCS861001R0407 | 411442 | 0.24 | 1 |
| 50 | 10 | S801S-K10 | 2CCS861001R0427 | 201449 | 0.24 | 1 |
| 50 | 13 | S801S-K13 | 2CCS861001R0447 | 201456 | 0.24 | 1 |
| 50 | 16 | S801S-K16 | 2CCS861001R0467 | 201463 | 0.24 | 1 |
| 50 | 20 | S801S-K20 | 2CCS861001R0487 | 201470 | 0.24 | 1 |
| 50 | 25 | S801S-K25 | 2CCS861001R0517 | 201487 | 0.24 | 1 |
| 50 | 32 | S801S-K32 | 2CCS861001R0537 | 201494 | 0.24 | 1 |
| 50 | 40 | S801S-K40 | 2CCS861001R0557 | 201500 | 0.24 | 1 |
| 50 | 50 | S801S-K50 | 2CCS861001R0577 | 201517 | 0.24 | 1 |
| 50 | 63 | S801S-K63 | 2CCS861001R0597 | 201524 | 0.24 | 1 |
| 50 | 80 | S801S-K80 | 2CCS861001R0627 | 201531 | 0.24 | 1 |
| 50 | 100 | S801S-K100 | 2CCS861001R0637 | 201548 | 0.24 | 1 |
| 50 | 125 | S801S-K125 | 2CCS861001R0647 | 201555 | 0.24 | 1 |



2CCS413014F0001



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S802S-K6 | 2CCS862001R0067 | 408237 | 0.49 | 1 |
| 50 | 8 | S802S-K8 | 2CCS862001R0407 | 411459 | 0.49 | 1 |
| 50 | 10 | S802S-K10 | 2CCS862001R0427 | 201562 | 0.49 | 1 |
| 50 | 13 | S802S-K13 | 2CCS862001R0447 | 201579 | 0.49 | 1 |
| 50 | 16 | S802S-K16 | 2CCS862001R0467 | 201586 | 0.49 | 1 |
| 50 | 20 | S802S-K20 | 2CCS862001R0487 | 201593 | 0.49 | 1 |
| 50 | 25 | S802S-K25 | 2CCS862001R0517 | 201609 | 0.49 | 1 |
| 50 | 32 | S802S-K32 | 2CCS862001R0537 | 201616 | 0.49 | 1 |
| 50 | 40 | S802S-K40 | 2CCS862001R0557 | 201623 | 0.49 | 1 |
| 50 | 50 | S802S-K50 | 2CCS862001R0577 | 201630 | 0.49 | 1 |
| 50 | 63 | S802S-K63 | 2CCS862001R0597 | 201647 | 0.49 | 1 |
| 50 | 80 | S802S-K80 | 2CCS862001R0627 | 201654 | 0.49 | 1 |
| 50 | 100 | S802S-K100 | 2CCS862001R0637 | 201661 | 0.49 | 1 |
| 50 | 125 | S802S-K125 | 2CCS862001R0647 | 201678 | 0.49 | 1 |



2CCS413015F0001



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 50 | 6 | S803S-K6 | 2CCS863001R0067 | 408244 | 0.74 | 1 |
| 50 | 8 | S803S-K8 | 2CCS863001R0407 | 411466 | 0.74 | 1 |
| 50 | 10 | S803S-K10 | 2CCS863001R0427 | 201685 | 0.74 | 1 |
| 50 | 13 | S803S-K13 | 2CCS863001R0447 | 201692 | 0.74 | 1 |
| 50 | 16 | S803S-K16 | 2CCS863001R0467 | 201708 | 0.74 | 1 |
| 50 | 20 | S803S-K20 | 2CCS863001R0487 | 201715 | 0.74 | 1 |
| 50 | 25 | S803S-K25 | 2CCS863001R0517 | 201722 | 0.74 | 1 |
| 50 | 32 | S803S-K32 | 2CCS863001R0537 | 201739 | 0.74 | 1 |
| 50 | 40 | S803S-K40 | 2CCS863001R0557 | 201746 | 0.74 | 1 |
| 50 | 50 | S803S-K50 | 2CCS863001R0577 | 201753 | 0.74 | 1 |
| 50 | 63 | aS803S-K63 | 2CCS863001R0597 | 201760 | 0.74 | 1 |
| 50 | 80 | S803S-K80 | 2CCS863001R0627 | 201777 | 0.74 | 1 |
| 50 | 100 | S803S-K100 | 2CCS863001R0637 | 201784 | 0.74 | 1 |
| 50 | 125 | S803S-K125 | 2CCS863001R0647 | 201791 | 0.74 | 1 |

S800S-K Characteristic K

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CCS864001R06001



| I_{CU} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 50 | 6 | S804S-K6 | 2CCS864001R0067 | 408251 | 0.98 | 1 |
| 50 | 8 | S804S-K8 | 2CCS864001R0407 | 411473 | 0.98 | 1 |
| 50 | 10 | S804S-K10 | 2CCS864001R0427 | 201807 | 0.98 | 1 |
| 50 | 13 | S804S-K13 | 2CCS864001R0447 | 201814 | 0.98 | 1 |
| 50 | 16 | S804S-K16 | 2CCS864001R0467 | 201821 | 0.98 | 1 |
| 50 | 20 | S804S-K20 | 2CCS864001R0487 | 201838 | 0.98 | 1 |
| 50 | 25 | S804S-K25 | 2CCS864001R0517 | 201845 | 0.98 | 1 |
| 50 | 32 | S804S-K32 | 2CCS864001R0537 | 201852 | 0.98 | 1 |
| 50 | 40 | S804S-K40 | 2CCS864001R0557 | 201869 | 0.98 | 1 |
| 50 | 50 | S804S-K50 | 2CCS864001R0577 | 201876 | 0.98 | 1 |
| 50 | 63 | S804S-K63 | 2CCS864001R0597 | 201883 | 0.98 | 1 |
| 50 | 80 | S804S-K80 | 2CCS864001R0627 | 201890 | 0.98 | 1 |
| 50 | 100 | S804S-K100 | 2CCS864001R0637 | 201906 | 0.98 | 1 |
| 50 | 125 | S804S-K125 | 2CCS864001R0647 | 201913 | 0.98 | 1 |

S803S-KM Characteristic KM*

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CCS413017R001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 50 | 10 | S803S-KM10 | 2CCF019559R0001 | 41104 | 0.735 | 1 |
| 50 | 16 | S803S-KM16 | 2CCF019569R0001 | 41111 | 0.735 | 1 |
| 50 | 20 | S803S-KM20 | 2CCS863001R0486 | 02194 | 0.74 | 1 |
| 50 | 25 | S803S-KM25 | 2CCS863001R0516 | 02200 | 0.74 | 1 |
| 50 | 32 | S803S-KM32 | 2CCS863001R0536 | 02217 | 0.74 | 1 |
| 50 | 40 | S803S-KM40 | 2CCS863001R0556 | 02224 | 0.74 | 1 |
| 50 | 50 | S803S-KM50 | 2CCS863001R0576 | 02231 | 0.74 | 1 |
| 50 | 63 | S803S-KM63 | 2CCS863001R0596 | 02248 | 0.74 | 1 |
| 50 | 80 | S803S-KM80 | 2CCS863001R0626 | 02255 | 0.74 | 1 |

*M stands for magnetic tripping only

S800S-UCB Characteristic B*

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CC0413225F0001



2CC0413224F0001



2CC0413225F0001



2CC0413225F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 50 | 10 | S801S-UCB10 | 2CCS861001R1105 | 02842 | 0.24 | 1 |
| 50 | 13 | S801S-UCB13 | 2CCS861001R1135 | 02859 | 0.24 | 1 |
| 50 | 16 | S801S-UCB16 | 2CCS861001R1165 | 02866 | 0.24 | 1 |
| 50 | 20 | S801S-UCB20 | 2CCS861001R1205 | 02873 | 0.24 | 1 |
| 50 | 25 | S801S-UCB25 | 2CCS861001R1255 | 02880 | 0.24 | 1 |
| 50 | 32 | S801S-UCB32 | 2CCS861001R1325 | 02897 | 0.24 | 1 |
| 50 | 40 | S801S-UCB40 | 2CCS861001R1405 | 02903 | 0.24 | 1 |
| 50 | 50 | S801S-UCB50 | 2CCS861001R1505 | 02910 | 0.24 | 1 |
| 50 | 63 | S801S-UCB63 | 2CCS861001R1635 | 02927 | 0.24 | 1 |
| 50 | 80 | S801S-UCB80 | 2CCS861001R1805 | 02934 | 0.24 | 1 |
| 50 | 100 | S801S-UCB100 | 2CCS861001R1825 | 02941 | 0.24 | 1 |
| 50 | 125 | S801S-UCB125 | 2CCS861001R1845 | 02958 | 0.24 | 1 |
| 50 | 10 | S802S-UCB10 | 2CCS862001R1105 | 02965 | 0.49 | 1 |
| 50 | 13 | S802S-UCB13 | 2CCS862001R1135 | 02972 | 0.49 | 1 |
| 50 | 16 | S802S-UCB16 | 2CCS862001R1165 | 02989 | 0.49 | 1 |
| 50 | 20 | S802S-UCB20 | 2CCS862001R1205 | 02996 | 0.49 | 1 |
| 50 | 25 | S802S-UCB25 | 2CCS862001R1255 | 03009 | 0.49 | 1 |
| 50 | 32 | S802S-UCB32 | 2CCS862001R1325 | 03016 | 0.49 | 1 |
| 50 | 40 | S802S-UCB40 | 2CCS862001R1405 | 03023 | 0.49 | 1 |
| 50 | 50 | S802S-UCB50 | 2CCS862001R1505 | 03030 | 0.49 | 1 |
| 50 | 63 | S802S-UCB63 | 2CCS862001R1635 | 03047 | 0.49 | 1 |
| 50 | 80 | S802S-UCB80 | 2CCS862001R1805 | 03054 | 0.49 | 1 |
| 50 | 100 | S802S-UCB100 | 2CCS862001R1825 | 03061 | 0.49 | 1 |
| 50 | 125 | S802S-UCB125 | 2CCS862001R1845 | 03078 | 0.49 | 1 |
| 50 | 10 | S803S-UCB10 | 2CCS863001R1105 | 03085 | 0.74 | 1 |
| 50 | 13 | S803S-UCB13 | 2CCS863001R1135 | 03092 | 0.74 | 1 |
| 50 | 16 | S803S-UCB16 | 2CCS863001R1165 | 03108 | 0.74 | 1 |
| 50 | 20 | S803S-UCB20 | 2CCS863001R1205 | 03115 | 0.74 | 1 |
| 50 | 25 | S803S-UCB25 | 2CCS863001R1255 | 03122 | 0.74 | 1 |
| 50 | 32 | S803S-UCB32 | 2CCS863001R1325 | 03139 | 0.74 | 1 |
| 50 | 40 | S803S-UCB40 | 2CCS863001R1405 | 03146 | 0.74 | 1 |
| 50 | 50 | S803S-UCB50 | 2CCS863001R1505 | 03153 | 0.74 | 1 |
| 50 | 63 | S803S-UCB63 | 2CCS863001R1635 | 03160 | 0.74 | 1 |
| 50 | 80 | S803S-UCB80 | 2CCS863001R1805 | 03177 | 0.74 | 1 |
| 50 | 100 | S803S-UCB100 | 2CCS863001R1825 | 03184 | 0.74 | 1 |
| 50 | 125 | S803S-UCB125 | 2CCS863001R1845 | 03191 | 0.74 | 1 |
| 50 | 10 | S804S-UCB10 | 2CCS864001R1105 | 03207 | 0.98 | 1 |
| 50 | 13 | S804S-UCB13 | 2CCS864001R1135 | 03214 | 0.98 | 1 |
| 50 | 16 | S804S-UCB16 | 2CCS864001R1165 | 03221 | 0.98 | 1 |
| 50 | 20 | S804S-UCB20 | 2CCS864001R1205 | 03238 | 0.98 | 1 |
| 50 | 25 | S804S-UCB25 | 2CCS864001R1255 | 03245 | 0.98 | 1 |
| 50 | 32 | S804S-UCB32 | 2CCS864001R1325 | 03252 | 0.98 | 1 |
| 50 | 40 | S804S-UCB40 | 2CCS864001R1405 | 03269 | 0.98 | 1 |
| 50 | 50 | S804S-UCB50 | 2CCS864001R1505 | 03276 | 0.98 | 1 |
| 50 | 63 | S804S-UCB63 | 2CCS864001R1635 | 03283 | 0.98 | 1 |
| 50 | 80 | S804S-UCB80 | 2CCS864001R1805 | 03290 | 0.98 | 1 |
| 50 | 100 | S804S-UCB100 | 2CCS864001R1825 | 03306 | 0.98 | 1 |
| 50 | 125 | S804S-UCB125 | 2CCS864001R1845 | 03313 | 0.98 | 1 |

*For DC applications

S800S-UCK Characteristic K*

$I_{cu} = 50 \text{ kA}$; with interchangeable cage terminal

1



2CC0413227F0001



2CC0413228F0001



2CC0413229F0001



2CC0413230F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 50 | 10 | S801S-UCK10 | 2CCS861001R1427 | 03320 | 0.24 | 1 |
| 50 | 13 | S801S-UCK13 | 2CCS861001R1447 | 03337 | 0.24 | 1 |
| 50 | 16 | S801S-UCK16 | 2CCS861001R1467 | 03344 | 0.24 | 1 |
| 50 | 20 | S801S-UCK20 | 2CCS861001R1487 | 03351 | 0.24 | 1 |
| 50 | 25 | S801S-UCK25 | 2CCS861001R1517 | 03368 | 0.24 | 1 |
| 50 | 32 | S801S-UCK32 | 2CCS861001R1537 | 03375 | 0.24 | 1 |
| 50 | 40 | S801S-UCK40 | 2CCS861001R1557 | 03382 | 0.24 | 1 |
| 50 | 50 | S801S-UCK50 | 2CCS861001R1577 | 03399 | 0.24 | 1 |
| 50 | 63 | S801S-UCK63 | 2CCS861001R1597 | 03405 | 0.24 | 1 |
| 50 | 80 | S801S-UCK80 | 2CCS861001R1627 | 03412 | 0.24 | 1 |
| 50 | 100 | S801S-UCK100 | 2CCS861001R1637 | 03429 | 0.24 | 1 |
| 50 | 125 | S801S-UCK125 | 2CCS861001R1647 | 03436 | 0.24 | 1 |
| 50 | 10 | S802S-UCK10 | 2CCS862001R1427 | 03443 | 0.49 | 1 |
| 50 | 13 | S802S-UCK13 | 2CCS862001R1447 | 03450 | 0.49 | 1 |
| 50 | 16 | S802S-UCK16 | 2CCS862001R1467 | 03467 | 0.49 | 1 |
| 50 | 20 | S802S-UCK20 | 2CCS862001R1487 | 03474 | 0.49 | 1 |
| 50 | 25 | S802S-UCK25 | 2CCS862001R1517 | 03481 | 0.49 | 1 |
| 50 | 32 | S802S-UCK32 | 2CCS862001R1537 | 03498 | 0.49 | 1 |
| 50 | 40 | S802S-UCK40 | 2CCS862001R1557 | 03504 | 0.49 | 1 |
| 50 | 50 | S802S-UCK50 | 2CCS862001R1577 | 03511 | 0.49 | 1 |
| 50 | 63 | S802S-UCK63 | 2CCS862001R1597 | 03528 | 0.49 | 1 |
| 50 | 80 | S802S-UCK80 | 2CCS862001R1627 | 03535 | 0.49 | 1 |
| 50 | 100 | S802S-UCK100 | 2CCS862001R1637 | 03542 | 0.49 | 1 |
| 50 | 125 | S802S-UCK125 | 2CCS862001R1647 | 03559 | 0.49 | 1 |
| 50 | 10 | S803S-UCK10 | 2CCS863001R1427 | 03566 | 0.74 | 1 |
| 50 | 13 | S803S-UCK13 | 2CCS863001R1447 | 03573 | 0.74 | 1 |
| 50 | 16 | S803S-UCK16 | 2CCS863001R1467 | 03580 | 0.74 | 1 |
| 50 | 20 | S803S-UCK20 | 2CCS863001R1487 | 03597 | 0.74 | 1 |
| 50 | 25 | S803S-UCK25 | 2CCS863001R1517 | 03603 | 0.74 | 1 |
| 50 | 32 | S803S-UCK32 | 2CCS863001R1537 | 03610 | 0.74 | 1 |
| 50 | 40 | S803S-UCK40 | 2CCS863001R1557 | 03627 | 0.74 | 1 |
| 50 | 50 | S803S-UCK50 | 2CCS863001R1577 | 03634 | 0.74 | 1 |
| 50 | 63 | S803S-UCK63 | 2CCS863001R1597 | 03641 | 0.74 | 1 |
| 50 | 80 | S803S-UCK80 | 2CCS863001R1627 | 03658 | 0.74 | 1 |
| 50 | 100 | S803S-UCK100 | 2CCS863001R1637 | 03665 | 0.74 | 1 |
| 50 | 125 | S803S-UCK125 | 2CCS863001R1647 | 03672 | 0.74 | 1 |
| 50 | 10 | S804S-UCK10 | 2CCS864001R1427 | 03689 | 0.98 | 1 |
| 50 | 13 | S804S-UCK13 | 2CCS864001R1447 | 03696 | 0.98 | 1 |
| 50 | 16 | S804S-UCK16 | 2CCS864001R1467 | 03702 | 0.98 | 1 |
| 50 | 20 | S804S-UCK20 | 2CCS864001R1487 | 03719 | 0.98 | 1 |
| 50 | 25 | S804S-UCK25 | 2CCS864001R1517 | 03726 | 0.98 | 1 |
| 50 | 32 | S804S-UCK32 | 2CCS864001R1537 | 03733 | 0.98 | 1 |
| 50 | 40 | S804S-UCK40 | 2CCS864001R1557 | 03740 | 0.98 | 1 |
| 50 | 50 | S804S-UCK50 | 2CCS864001R1577 | 03757 | 0.98 | 1 |
| 50 | 63 | S804S-UCK63 | 2CCS864001R1597 | 03764 | 0.98 | 1 |
| 50 | 80 | S804S-UCK80 | 2CCS864001R1627 | 03771 | 0.98 | 1 |
| 50 | 100 | S804S-UCK100 | 2CCS864001R1637 | 03788 | 0.98 | 1 |
| 50 | 125 | S804S-UCK125 | 2CCS864001R1647 | 03795 | 0.98 | 1 |

*For DC applications

S800N-B Characteristic B

$I_{CU} = 36 \text{ kA}$; with interchangeable cage terminal



2CC0413026F0001



2CC0413027F0001



2CC0413028F0001



| I_{cu} [kA] | Rated current | | Order details | Order code | GTIN EAN | Weight | Pack. |
|------------------|---------------|--|---------------|-----------------|----------|--------|-------|
| | [A] | | Type Code | | 7612271 | [kg] | unit |
| 36 | 6 | | S801N-B6 | 2CCS891001R0065 | 408428 | 0.24 | 1 |
| 36 | 8 | | S801N-B8 | 2CCS891001R0085 | 411640 | 0.24 | 1 |
| 36 | 10 | | S801N-B10 | 2CCS891001R0105 | 203801 | 0.24 | 1 |
| 36 | 13 | | S801N-B13 | 2CCS891001R0135 | 203818 | 0.24 | 1 |
| 36 | 16 | | S801N-B16 | 2CCS891001R0165 | 203825 | 0.24 | 1 |
| 36 | 20 | | S801N-B20 | 2CCS891001R0205 | 203832 | 0.24 | 1 |
| 36 | 25 | | S801N-B25 | 2CCS891001R0255 | 203849 | 0.24 | 1 |
| 36 | 32 | | S801N-B32 | 2CCS891001R0325 | 203856 | 0.24 | 1 |
| 36 | 40 | | S801N-B40 | 2CCS891001R0405 | 203863 | 0.24 | 1 |
| 36 | 50 | | S801N-B50 | 2CCS891001R0505 | 203870 | 0.24 | 1 |
| 36 | 63 | | S801N-B63 | 2CCS891001R0635 | 203887 | 0.24 | 1 |
| 36 | 80 | | S801N-B80 | 2CCS891001R0805 | 203894 | 0.24 | 1 |
| 36 | 100 | | S801N-B100 | 2CCS891001R0825 | 203900 | 0.24 | 1 |
| 36 | 125 | | S801N-B125 | 2CCS891001R0845 | 203917 | 0.24 | 1 |

| | | | | | | | |
|----|-----|--|------------|-----------------|--------|------|---|
| 36 | 6 | | S802N-B6 | 2CCS892001R0065 | 408435 | 0.48 | 1 |
| 36 | 8 | | S802N-B8 | 2CCS892001R0085 | 411657 | 0.48 | 1 |
| 36 | 10 | | S802N-B10 | 2CCS892001R0105 | 203924 | 0.48 | 1 |
| 36 | 13 | | S802N-B13 | 2CCS892001R0135 | 203931 | 0.48 | 1 |
| 36 | 16 | | S802N-B16 | 2CCS892001R0165 | 203948 | 0.48 | 1 |
| 36 | 20 | | S802N-B20 | 2CCS892001R0205 | 203955 | 0.48 | 1 |
| 36 | 25 | | S802N-B25 | 2CCS892001R0255 | 203962 | 0.48 | 1 |
| 36 | 32 | | S802N-B32 | 2CCS892001R0325 | 203979 | 0.48 | 1 |
| 36 | 40 | | S802N-B40 | 2CCS892001R0405 | 203986 | 0.48 | 1 |
| 36 | 50 | | S802N-B50 | 2CCS892001R0505 | 203993 | 0.48 | 1 |
| 36 | 63 | | S802N-B63 | 2CCS892001R0635 | 204006 | 0.48 | 1 |
| 36 | 80 | | S802N-B80 | 2CCS892001R0805 | 204013 | 0.48 | 1 |
| 36 | 100 | | S802N-B100 | 2CCS892001R0825 | 204020 | 0.48 | 1 |
| 36 | 125 | | S802N-B125 | 2CCS892001R0845 | 204037 | 0.48 | 1 |

| | | | | | | | |
|----|-----|--|------------|-----------------|--------|------|---|
| 36 | 6 | | S803N-B6 | 2CCS893001R0065 | 408442 | 0.72 | 1 |
| 36 | 8 | | S803N-B8 | 2CCS893001R0085 | 411664 | 0.72 | 1 |
| 36 | 10 | | S803N-B10 | 2CCS893001R0105 | 204044 | 0.72 | 1 |
| 36 | 13 | | S803N-B13 | 2CCS893001R0135 | 204051 | 0.72 | 1 |
| 36 | 16 | | S803N-B16 | 2CCS893001R0165 | 204068 | 0.72 | 1 |
| 36 | 20 | | S803N-B20 | 2CCS893001R0205 | 204075 | 0.72 | 1 |
| 36 | 25 | | S803N-B25 | 2CCS893001R0255 | 204082 | 0.72 | 1 |
| 36 | 32 | | S803N-B32 | 2CCS893001R0325 | 204099 | 0.72 | 1 |
| 36 | 40 | | S803N-B40 | 2CCS893001R0405 | 204105 | 0.72 | 1 |
| 36 | 50 | | S803N-B50 | 2CCS893001R0505 | 204112 | 0.72 | 1 |
| 36 | 63 | | S803N-B63 | 2CCS893001R0635 | 204129 | 0.72 | 1 |
| 36 | 80 | | S803N-B80 | 2CCS893001R0805 | 204136 | 0.72 | 1 |
| 36 | 100 | | S803N-B100 | 2CCS893001R0825 | 204143 | 0.72 | 1 |
| 36 | 125 | | S803N-B125 | 2CCS893001R0845 | 204150 | 0.72 | 1 |

S800N-B Characteristic B

$I_{cu} = 36 \text{ kA}$; with interchangeable cage terminal

1



2CCS413029R0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 36 | 6 | S804N-B6 | 2CCS894001R0065 | 408459 | 0.96 | 1 |
| 36 | 8 | S804N-B8 | 2CCS894001R0085 | 411671 | 0.96 | 1 |
| 36 | 10 | S804N-B10 | 2CCS894001R0105 | 204167 | 0.96 | 1 |
| 36 | 13 | S804N-B13 | 2CCS894001R0135 | 204174 | 0.96 | 1 |
| 36 | 16 | S804N-B16 | 2CCS894001R0165 | 204181 | 0.96 | 1 |
| 36 | 20 | S804N-B20 | 2CCS894001R0205 | 204198 | 0.96 | 1 |
| 36 | 25 | S804N-B25 | 2CCS894001R0255 | 204204 | 0.96 | 1 |
| 36 | 32 | S804N-B32 | 2CCS894001R0325 | 204211 | 0.96 | 1 |
| 36 | 40 | S804N-B40 | 2CCS894001R0405 | 204228 | 0.96 | 1 |
| 36 | 50 | S804N-B50 | 2CCS894001R0505 | 204235 | 0.96 | 1 |
| 36 | 63 | S804N-B63 | 2CCS894001R0635 | 204242 | 0.96 | 1 |
| 36 | 80 | S804N-B80 | 2CCS894001R0805 | 204259 | 0.96 | 1 |
| 36 | 100 | S804N-B100 | 2CCS894001R0825 | 204266 | 0.96 | 1 |
| 36 | 125 | S804N-B125 | 2CCS894001R0845 | 204273 | 0.96 | 1 |

S800N-C Characteristic C

$I_{CU} = 36 \text{ kA}$; with interchangeable cage terminal



2CC04 1303RF001



2CC04 1303RF001



2CC04 1303RF001



| I_{CU} [kA] | Rated current | | Order details | Order code | GTIN EAN | Weight | Pack. |
|------------------|---------------|------------|-----------------|------------|----------|--------|-------|
| | [A] | Type Code | | | 7612271 | [kg] | unit |
| 36 | 6 | S801N-C6 | 2CCS891001R0064 | 408466 | 0.24 | 1 | |
| 36 | 8 | S801N-C8 | 2CCS891001R0084 | 411688 | 0.24 | 1 | |
| 36 | 10 | S801N-C10 | 2CCS891001R0104 | 204280 | 0.24 | 1 | |
| 36 | 13 | S801N-C13 | 2CCS891001R0134 | 204297 | 0.24 | 1 | |
| 36 | 16 | S801N-C16 | 2CCS891001R0164 | 204303 | 0.24 | 1 | |
| 36 | 20 | S801N-C20 | 2CCS891001R0204 | 204310 | 0.24 | 1 | |
| 36 | 25 | S801N-C25 | 2CCS891001R0254 | 204327 | 0.24 | 1 | |
| 36 | 32 | S801N-C32 | 2CCS891001R0324 | 204334 | 0.24 | 1 | |
| 36 | 40 | S801N-C40 | 2CCS891001R0404 | 204341 | 0.24 | 1 | |
| 36 | 50 | S801N-C50 | 2CCS891001R0504 | 204358 | 0.24 | 1 | |
| 36 | 63 | S801N-C63 | 2CCS891001R0634 | 204365 | 0.24 | 1 | |
| 36 | 80 | S801N-C80 | 2CCS891001R0804 | 204372 | 0.24 | 1 | |
| 36 | 100 | S801N-C100 | 2CCS891001R0824 | 204389 | 0.24 | 1 | |
| 36 | 125 | S801N-C125 | 2CCS891001R0844 | 204396 | 0.24 | 1 | |

| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 36 | 6 | S802N-C6 | 2CCS892001R0064 | 408473 | 0.48 | 1 |
| 36 | 8 | S802N-C8 | 2CCS892001R0084 | 411695 | 0.48 | 1 |
| 36 | 10 | S802N-C10 | 2CCS892001R0104 | 204402 | 0.48 | 1 |
| 36 | 13 | S802N-C13 | 2CCS892001R0134 | 204419 | 0.48 | 1 |
| 36 | 16 | S802N-C16 | 2CCS892001R0164 | 204426 | 0.48 | 1 |
| 36 | 20 | S802N-C20 | 2CCS892001R0204 | 204433 | 0.48 | 1 |
| 36 | 25 | S802N-C25 | 2CCS892001R0254 | 204440 | 0.48 | 1 |
| 36 | 32 | S802N-C32 | 2CCS892001R0324 | 204457 | 0.48 | 1 |
| 36 | 40 | S802N-C40 | 2CCS892001R0404 | 204464 | 0.48 | 1 |
| 36 | 50 | S802N-C50 | 2CCS892001R0504 | 204471 | 0.48 | 1 |
| 36 | 63 | S802N-C63 | 2CCS892001R0634 | 204488 | 0.48 | 1 |
| 36 | 80 | S802N-C80 | 2CCS892001R0804 | 204495 | 0.48 | 1 |
| 36 | 100 | S802N-C100 | 2CCS892001R0824 | 204501 | 0.48 | 1 |
| 36 | 125 | S802N-C125 | 2CCS892001R0844 | 204518 | 0.48 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 36 | 6 | S803N-C6 | 2CCS893001R0064 | 408480 | 0.72 | 1 |
| 36 | 8 | S803N-C8 | 2CCS893001R0084 | 411701 | 0.72 | 1 |
| 36 | 10 | S803N-C10 | 2CCS893001R0104 | 204525 | 0.72 | 1 |
| 36 | 13 | S803N-C13 | 2CCS893001R0134 | 204532 | 0.72 | 1 |
| 36 | 16 | S803N-C16 | 2CCS893001R0164 | 204549 | 0.72 | 1 |
| 36 | 20 | S803N-C20 | 2CCS893001R0204 | 204556 | 0.72 | 1 |
| 36 | 25 | S803N-C25 | 2CCS893001R0254 | 204563 | 0.72 | 1 |
| 36 | 32 | S803N-C32 | 2CCS893001R0324 | 204570 | 0.72 | 1 |
| 36 | 40 | S803N-C40 | 2CCS893001R0404 | 204587 | 0.72 | 1 |
| 36 | 50 | S803N-C50 | 2CCS893001R0504 | 204594 | 0.72 | 1 |
| 36 | 63 | S803N-C63 | 2CCS893001R0634 | 204600 | 0.72 | 1 |
| 36 | 80 | S803N-C80 | 2CCS893001R0804 | 204617 | 0.72 | 1 |
| 36 | 100 | S803N-C100 | 2CCS893001R0824 | 204624 | 0.72 | 1 |
| 36 | 125 | S803N-C125 | 2CCS893001R0844 | 204631 | 0.72 | 1 |

S800N-C Characteristic C

$I_{cu} = 36 \text{ kA}$; with interchangeable cage terminal

1



2CC0413033F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 36 | 6 | S804N-C6 | 2CCS894001R0064 | 408497 | 0.96 | 1 |
| 36 | 8 | S804N-C8 | 2CCS894001R0084 | 411718 | 0.96 | 1 |
| 36 | 10 | S804N-C10 | 2CCS894001R0104 | 204648 | 0.96 | 1 |
| 36 | 13 | S804N-C13 | 2CCS894001R0134 | 204655 | 0.96 | 1 |
| 36 | 16 | S804N-C16 | 2CCS894001R0164 | 204662 | 0.96 | 1 |
| 36 | 20 | S804N-C20 | 2CCS894001R0204 | 204679 | 0.96 | 1 |
| 36 | 25 | S804N-C25 | 2CCS894001R0254 | 204686 | 0.96 | 1 |
| 36 | 32 | S804N-C32 | 2CCS894001R0324 | 204693 | 0.96 | 1 |
| 36 | 40 | S804N-C40 | 2CCS894001R0404 | 204709 | 0.96 | 1 |
| 36 | 50 | S804N-C50 | 2CCS894001R0504 | 204716 | 0.96 | 1 |
| 36 | 63 | S804N-C63 | 2CCS894001R0634 | 204723 | 0.96 | 1 |
| 36 | 80 | S804N-C80 | 2CCS894001R0804 | 204730 | 0.96 | 1 |
| 36 | 100 | S804N-C100 | 2CCS894001R0824 | 204747 | 0.96 | 1 |
| 36 | 125 | S804N-C125 | 2CCS894001R0844 | 204754 | 0.96 | 1 |

S800N-D Characteristic D

$I_{CU} = 36 \text{ kA}$; with interchangeable cage terminal



ZCC0413034F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 36 | 6 | S801N-D6 | 2CCS891001R0061 | 408503 | 0.24 | 1 |
| 36 | 8 | S801N-D8 | 2CCS891001R0081 | 411725 | 0.24 | 1 |
| 36 | 10 | S801N-D10 | 2CCS891001R0101 | 204761 | 0.24 | 1 |
| 36 | 13 | S801N-D13 | 2CCS891001R0131 | 204778 | 0.24 | 1 |
| 36 | 16 | S801N-D16 | 2CCS891001R0161 | 204785 | 0.24 | 1 |
| 36 | 20 | S801N-D20 | 2CCS891001R0201 | 204792 | 0.24 | 1 |
| 36 | 25 | S801N-D25 | 2CCS891001R0251 | 204808 | 0.24 | 1 |
| 36 | 32 | S801N-D32 | 2CCS891001R0321 | 204815 | 0.24 | 1 |
| 36 | 40 | S801N-D40 | 2CCS891001R0401 | 204822 | 0.24 | 1 |
| 36 | 50 | S801N-D50 | 2CCS891001R0501 | 204839 | 0.24 | 1 |
| 36 | 63 | S801N-D63 | 2CCS891001R0631 | 204846 | 0.24 | 1 |
| 36 | 80 | S801N-D80 | 2CCS891001R0801 | 204853 | 0.24 | 1 |
| 36 | 100 | S801N-D100 | 2CCS891001R0821 | 204860 | 0.24 | 1 |
| 36 | 125 | S801N-D125 | 2CCS891001R0841 | 204877 | 0.24 | 1 |



ZCC0413035F0001



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 36 | 6 | S802N-D6 | 2CCS892001R0061 | 408510 | 0.49 | 1 |
| 36 | 8 | S802N-D8 | 2CCS892001R0081 | 411732 | 0.49 | 1 |
| 36 | 10 | S802N-D10 | 2CCS892001R0101 | 204884 | 0.49 | 1 |
| 36 | 13 | S802N-D13 | 2CCS892001R0131 | 204891 | 0.49 | 1 |
| 36 | 16 | S802N-D16 | 2CCS892001R0161 | 204907 | 0.49 | 1 |
| 36 | 20 | S802N-D20 | 2CCS892001R0201 | 204914 | 0.49 | 1 |
| 36 | 25 | S802N-D25 | 2CCS892001R0251 | 204921 | 0.49 | 1 |
| 36 | 32 | S802N-D32 | 2CCS892001R0321 | 204938 | 0.49 | 1 |
| 36 | 40 | S802N-D40 | 2CCS892001R0401 | 204945 | 0.49 | 1 |
| 36 | 50 | S802N-D50 | 2CCS892001R0501 | 204952 | 0.49 | 1 |
| 36 | 63 | S802N-D63 | 2CCS892001R0631 | 204969 | 0.49 | 1 |
| 36 | 80 | S802N-D80 | 2CCS892001R0801 | 204976 | 0.49 | 1 |
| 36 | 100 | S802N-D100 | 2CCS892001R0821 | 204983 | 0.49 | 1 |
| 36 | 125 | S802N-D125 | 2CCS892001R0841 | 204990 | 0.49 | 1 |



ZCC0413036F0001



| | | | | | | |
|----|-----|------------|-----------------|--------|------|---|
| 36 | 6 | S803N-D6 | 2CCS893001R0061 | 408527 | 0.74 | 1 |
| 36 | 8 | S803N-D8 | 2CCS893001R0081 | 411749 | 0.74 | 1 |
| 36 | 10 | S803N-D10 | 2CCS893001R0101 | 205003 | 0.74 | 1 |
| 36 | 13 | S803N-D13 | 2CCS893001R0131 | 205010 | 0.74 | 1 |
| 36 | 16 | S803N-D16 | 2CCS893001R0161 | 205027 | 0.74 | 1 |
| 36 | 20 | S803N-D20 | 2CCS893001R0201 | 205034 | 0.74 | 1 |
| 36 | 25 | S803N-D25 | 2CCS893001R0251 | 205041 | 0.74 | 1 |
| 36 | 32 | S803N-D32 | 2CCS893001R0321 | 205058 | 0.74 | 1 |
| 36 | 40 | S803N-D40 | 2CCS893001R0401 | 205065 | 0.74 | 1 |
| 36 | 50 | S803N-D50 | 2CCS893001R0501 | 205072 | 0.74 | 1 |
| 36 | 63 | S803N-D63 | 2CCS893001R0631 | 205089 | 0.74 | 1 |
| 36 | 80 | S803N-D80 | 2CCS893001R0801 | 205096 | 0.74 | 1 |
| 36 | 100 | S803N-D100 | 2CCS893001R0821 | 205102 | 0.74 | 1 |
| 36 | 125 | S803N-D125 | 2CCS893001R0841 | 205119 | 0.74 | 1 |

S800N-D Characteristic D

$I_{cu} = 36 \text{ kA}$; with interchangeable cage terminal

1



20CC419037F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 36 | 6 | S804N-D6 | 2CCS894001R0061 | 408534 | 0.98 | 1 |
| 36 | 8 | S804N-D8 | 2CCS894001R0081 | 411756 | 0.98 | 1 |
| 36 | 10 | S804N-D10 | 2CCS894001R0101 | 205126 | 0.98 | 1 |
| 36 | 13 | S804N-D13 | 2CCS894001R0131 | 205133 | 0.98 | 1 |
| 36 | 16 | S804N-D16 | 2CCS894001R0161 | 205140 | 0.98 | 1 |
| 36 | 20 | S804N-D20 | 2CCS894001R0201 | 205157 | 0.98 | 1 |
| 36 | 25 | S804N-D25 | 2CCS894001R0251 | 205164 | 0.98 | 1 |
| 36 | 32 | S804N-D32 | 2CCS894001R0321 | 205171 | 0.98 | 1 |
| 36 | 40 | S804N-D40 | 2CCS894001R0401 | 205188 | 0.98 | 1 |
| 36 | 50 | S804N-D50 | 2CCS894001R0501 | 205195 | 0.98 | 1 |
| 36 | 63 | S804N-D63 | 2CCS894001R0631 | 205201 | 0.98 | 1 |
| 36 | 80 | S804N-D80 | 2CCS894001R0801 | 205218 | 0.98 | 1 |
| 36 | 100 | S804N-D100 | 2CCS894001R0821 | 205225 | 0.98 | 1 |
| 36 | 125 | S804N-D125 | 2CCS894001R0841 | 205232 | 0.98 | 1 |

S800C-B Characteristic B

$I_{CU} = 25 \text{ kA}$; with interchangeable cage terminal



2CC0413282F0001

| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 25 | 10 | S801C-B10 | 2CCS881001R0105 | 12087 | 0.25 | 1 |
| 25 | 13 | S801C-B13 | 2CCS881001R0135 | 12247 | 0.25 | 1 |
| 25 | 16 | S801C-B16 | 2CCS881001R0165 | 12407 | 0.25 | 1 |
| 25 | 20 | S801C-B20 | 2CCS881001R0205 | 12568 | 0.25 | 1 |
| 25 | 25 | S801C-B25 | 2CCS881001R0255 | 12728 | 0.25 | 1 |
| 25 | 32 | S801C-B32 | 2CCS881001R0325 | 12889 | 0.25 | 1 |
| 25 | 40 | S801C-B40 | 2CCS881001R0405 | 13046 | 0.25 | 1 |
| 25 | 50 | S801C-B50 | 2CCS881001R0505 | 13206 | 0.25 | 1 |
| 25 | 63 | S801C-B63 | 2CCS881001R0635 | 13367 | 0.25 | 1 |
| 25 | 80 | S801C-B80 | 2CCS881001R0805 | 13527 | 0.25 | 1 |
| 25 | 100 | S801C-B100 | 2CCS881001R0825 | 13688 | 0.25 | 1 |
| 25 | 125 | S801C-B125 | 2CCS881001R0845 | 13848 | 0.25 | 1 |



2CC0413283F0001

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S802C-B10 | 2CCS882001R0105 | 12094 | 0.49 | 1 |
| 25 | 13 | S802C-B13 | 2CCS882001R0135 | 12254 | 0.49 | 1 |
| 25 | 16 | S802C-B16 | 2CCS882001R0165 | 12414 | 0.49 | 1 |
| 25 | 20 | S802C-B20 | 2CCS882001R0205 | 12575 | 0.49 | 1 |
| 25 | 25 | S802C-B25 | 2CCS882001R0255 | 12735 | 0.49 | 1 |
| 25 | 32 | S802C-B32 | 2CCS882001R0325 | 12896 | 0.49 | 1 |
| 25 | 40 | S802C-B40 | 2CCS882001R0405 | 13053 | 0.49 | 1 |
| 25 | 50 | S802C-B50 | 2CCS882001R0505 | 13213 | 0.49 | 1 |
| 25 | 63 | S802C-B63 | 2CCS882001R0635 | 13374 | 0.49 | 1 |
| 25 | 80 | S802C-B80 | 2CCS882001R0805 | 13534 | 0.49 | 1 |
| 25 | 100 | S802C-B100 | 2CCS882001R0825 | 13695 | 0.49 | 1 |
| 25 | 125 | S802C-B125 | 2CCS882001R0845 | 13855 | 0.49 | 1 |



2CC0413284F0001

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S803C-B10 | 2CCS883001R0105 | 12100 | 0.74 | 1 |
| 25 | 13 | S803C-B13 | 2CCS883001R0135 | 12261 | 0.74 | 1 |
| 25 | 16 | S803C-B16 | 2CCS883001R0165 | 12421 | 0.74 | 1 |
| 25 | 20 | S803C-B20 | 2CCS883001R0205 | 12582 | 0.74 | 1 |
| 25 | 25 | S803C-B25 | 2CCS883001R0255 | 12742 | 0.74 | 1 |
| 25 | 32 | S803C-B32 | 2CCS883001R0325 | 12902 | 0.74 | 1 |
| 25 | 40 | S803C-B40 | 2CCS883001R0405 | 13060 | 0.74 | 1 |
| 25 | 50 | S803C-B50 | 2CCS883001R0505 | 13220 | 0.74 | 1 |
| 25 | 63 | S803C-B63 | 2CCS883001R0635 | 13381 | 0.74 | 1 |
| 25 | 80 | S803C-B80 | 2CCS883001R0805 | 13541 | 0.74 | 1 |
| 25 | 100 | S803C-B100 | 2CCS883001R0825 | 13701 | 0.74 | 1 |
| 25 | 125 | S803C-B125 | 2CCS883001R0845 | 13862 | 0.74 | 1 |



2CC0413285F0001

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S804C-B10 | 2CCS884001R0105 | 12117 | 0.98 | 1 |
| 25 | 13 | S804C-B13 | 2CCS884001R0135 | 12278 | 0.98 | 1 |
| 25 | 16 | S804C-B16 | 2CCS884001R0165 | 12438 | 0.98 | 1 |
| 25 | 20 | S804C-B20 | 2CCS884001R0205 | 12599 | 0.98 | 1 |
| 25 | 25 | S804C-B25 | 2CCS884001R0255 | 12759 | 0.98 | 1 |
| 25 | 32 | S804C-B32 | 2CCS884001R0325 | 12919 | 0.98 | 1 |
| 25 | 40 | S804C-B40 | 2CCS884001R0405 | 13077 | 0.98 | 1 |
| 25 | 50 | S804C-B50 | 2CCS884001R0505 | 13237 | 0.98 | 1 |
| 25 | 63 | S804C-B63 | 2CCS884001R0635 | 13398 | 0.98 | 1 |
| 25 | 80 | S804C-B80 | 2CCS884001R0805 | 13558 | 0.98 | 1 |
| 25 | 100 | S804C-B100 | 2CCS884001R0825 | 13718 | 0.98 | 1 |
| 25 | 125 | S804C-B125 | 2CCS884001R0845 | 13879 | 0.98 | 1 |

S800C-C Characteristic C

$I_{cu} = 25 \text{ kA}$; with interchangeable cage terminal

1



2CC041328F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 25 | 10 | S801C-C10 | 2CCS881001R0104 | 12124 | 0.25 | 1 |
| 25 | 13 | S801C-C13 | 2CCS881001R0134 | 12285 | 0.25 | 1 |
| 25 | 16 | S801C-C16 | 2CCS881001R0164 | 12445 | 0.25 | 1 |
| 25 | 20 | S801C-C20 | 2CCS881001R0204 | 12605 | 0.25 | 1 |
| 25 | 25 | S801C-C25 | 2CCS881001R0254 | 12766 | 0.25 | 1 |
| 25 | 32 | S801C-C32 | 2CCS881001R0324 | 12926 | 0.25 | 1 |
| 25 | 40 | S801C-C40 | 2CCS881001R0404 | 13084 | 0.25 | 1 |
| 25 | 50 | S801C-C50 | 2CCS881001R0504 | 13244 | 0.25 | 1 |
| 25 | 63 | S801C-C63 | 2CCS881001R0634 | 13404 | 0.25 | 1 |
| 25 | 80 | S801C-C80 | 2CCS881001R0804 | 13565 | 0.25 | 1 |
| 25 | 100 | S801C-C100 | 2CCS881001R0824 | 13725 | 0.25 | 1 |
| 25 | 125 | S801C-C125 | 2CCS881001R0844 | 13886 | 0.25 | 1 |



2CC041326F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S802C-C10 | 2CCS882001R0104 | 12131 | 0.49 | 1 |
| 25 | 13 | S802C-C13 | 2CCS882001R0134 | 12292 | 0.49 | 1 |
| 25 | 16 | S802C-C16 | 2CCS882001R0164 | 12452 | 0.49 | 1 |
| 25 | 20 | S802C-C20 | 2CCS882001R0204 | 12612 | 0.49 | 1 |
| 25 | 25 | S802C-C25 | 2CCS882001R0254 | 12773 | 0.49 | 1 |
| 25 | 32 | S802C-C32 | 2CCS882001R0324 | 12933 | 0.49 | 1 |
| 25 | 40 | S802C-C40 | 2CCS882001R0404 | 13091 | 0.49 | 1 |
| 25 | 50 | S802C-C50 | 2CCS882001R0504 | 13251 | 0.49 | 1 |
| 25 | 63 | S802C-C63 | 2CCS882001R0634 | 13411 | 0.49 | 1 |
| 25 | 80 | S802C-C80 | 2CCS882001R0804 | 13572 | 0.49 | 1 |
| 25 | 100 | S802C-C100 | 2CCS882001R0824 | 13732 | 0.49 | 1 |
| 25 | 125 | S802C-C125 | 2CCS882001R0844 | 13893 | 0.49 | 1 |



2CC041328F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S803C-C10 | 2CCS883001R0104 | 12148 | 0.74 | 1 |
| 25 | 13 | S803C-C13 | 2CCS883001R0134 | 12308 | 0.74 | 1 |
| 25 | 16 | S803C-C16 | 2CCS883001R0164 | 12469 | 0.74 | 1 |
| 25 | 20 | S803C-C20 | 2CCS883001R0204 | 12629 | 0.74 | 1 |
| 25 | 25 | S803C-C25 | 2CCS883001R0254 | 12780 | 0.74 | 1 |
| 25 | 32 | S803C-C32 | 2CCS883001R0324 | 12940 | 0.74 | 1 |
| 25 | 40 | S803C-C40 | 2CCS883001R0404 | 13107 | 0.74 | 1 |
| 25 | 50 | S803C-C50 | 2CCS883001R0504 | 13268 | 0.74 | 1 |
| 25 | 63 | S803C-C63 | 2CCS883001R0634 | 13428 | 0.74 | 1 |
| 25 | 80 | S803C-C80 | 2CCS883001R0804 | 13589 | 0.74 | 1 |
| 25 | 100 | S803C-C100 | 2CCS883001R0824 | 13749 | 0.74 | 1 |
| 25 | 125 | S803C-C125 | 2CCS883001R0844 | 13909 | 0.74 | 1 |



2CC041328F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S804C-C10 | 2CCS884001R0104 | 12155 | 0.98 | 1 |
| 25 | 13 | S804C-C13 | 2CCS884001R0134 | 12315 | 0.98 | 1 |
| 25 | 16 | S804C-C16 | 2CCS884001R0164 | 12476 | 0.98 | 1 |
| 25 | 20 | S804C-C20 | 2CCS884001R0204 | 12636 | 0.98 | 1 |
| 25 | 25 | S804C-C25 | 2CCS884001R0254 | 12797 | 0.98 | 1 |
| 25 | 32 | S804C-C32 | 2CCS884001R0324 | 12957 | 0.98 | 1 |
| 25 | 40 | S804C-C40 | 2CCS884001R0404 | 13114 | 0.98 | 1 |
| 25 | 50 | S804C-C50 | 2CCS884001R0504 | 13275 | 0.98 | 1 |
| 25 | 63 | S804C-C63 | 2CCS884001R0634 | 13435 | 0.98 | 1 |
| 25 | 80 | S804C-C80 | 2CCS884001R0804 | 13596 | 0.98 | 1 |
| 25 | 100 | S804C-C100 | 2CCS884001R0824 | 13756 | 0.98 | 1 |
| 25 | 125 | S804C-C125 | 2CCS884001R0844 | 13916 | 0.98 | 1 |

S800C-D Characteristic D

$I_{CU} = 25 \text{ kA}$; with interchangeable cage terminal



20CC413270F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 25 | 10 | S801C-D10 | 2CCS881001R0101 | 12162 | 0.25 | 1 |
| 25 | 13 | S801C-D13 | 2CCS881001R0131 | 12322 | 0.25 | 1 |
| 25 | 16 | S801C-D16 | 2CCS881001R0161 | 12483 | 0.25 | 1 |
| 25 | 20 | S801C-D20 | 2CCS881001R0201 | 12643 | 0.25 | 1 |
| 25 | 25 | S801C-D25 | 2CCS881001R0251 | 12803 | 0.25 | 1 |
| 25 | 32 | S801C-D32 | 2CCS881001R0321 | 12964 | 0.25 | 1 |
| 25 | 40 | S801C-D40 | 2CCS881001R0401 | 13121 | 0.25 | 1 |
| 25 | 50 | S801C-D50 | 2CCS881001R0501 | 13282 | 0.25 | 1 |
| 25 | 63 | S801C-D63 | 2CCS881001R0631 | 13442 | 0.25 | 1 |
| 25 | 80 | S801C-D80 | 2CCS881001R0801 | 13602 | 0.25 | 1 |
| 25 | 100 | S801C-D100 | 2CCS881001R0821 | 13763 | 0.25 | 1 |
| 25 | 125 | S801C-D125 | 2CCS881001R0841 | 13923 | 0.25 | 1 |



20CC413271F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S802C-D10 | 2CCS882001R0101 | 12179 | 0.49 | 1 |
| 25 | 13 | S802C-D13 | 2CCS882001R0131 | 12339 | 0.49 | 1 |
| 25 | 16 | S802C-D16 | 2CCS882001R0161 | 12490 | 0.49 | 1 |
| 25 | 20 | S802C-D20 | 2CCS882001R0201 | 12650 | 0.49 | 1 |
| 25 | 25 | S802C-D25 | 2CCS882001R0251 | 12810 | 0.49 | 1 |
| 25 | 32 | S802C-D32 | 2CCS882001R0321 | 12971 | 0.49 | 1 |
| 25 | 40 | S802C-D40 | 2CCS882001R0401 | 13138 | 0.49 | 1 |
| 25 | 50 | S802C-D50 | 2CCS882001R0501 | 13299 | 0.49 | 1 |
| 25 | 63 | S802C-D63 | 2CCS882001R0631 | 13459 | 0.49 | 1 |
| 25 | 80 | S802C-D80 | 2CCS882001R0801 | 13619 | 0.49 | 1 |
| 25 | 100 | S802C-D100 | 2CCS882001R0821 | 13770 | 0.49 | 1 |
| 25 | 125 | S802C-D125 | 2CCS882001R0841 | 13930 | 0.49 | 1 |



20CC413272F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S803C-D10 | 2CCS883001R0101 | 12186 | 0.74 | 1 |
| 25 | 13 | S803C-D13 | 2CCS883001R0131 | 12346 | 0.74 | 1 |
| 25 | 16 | S803C-D16 | 2CCS883001R0161 | 12506 | 0.74 | 1 |
| 25 | 20 | S803C-D20 | 2CCS883001R0201 | 12667 | 0.74 | 1 |
| 25 | 25 | S803C-D25 | 2CCS883001R0251 | 12827 | 0.74 | 1 |
| 25 | 32 | S803C-D32 | 2CCS883001R0321 | 12988 | 0.74 | 1 |
| 25 | 40 | S803C-D40 | 2CCS883001R0401 | 13145 | 0.74 | 1 |
| 25 | 50 | S803C-D50 | 2CCS883001R0501 | 13305 | 0.74 | 1 |
| 25 | 63 | S803C-D63 | 2CCS883001R0631 | 13466 | 0.74 | 1 |
| 25 | 80 | S803C-D80 | 2CCS883001R0801 | 13626 | 0.74 | 1 |
| 25 | 100 | S803C-D100 | 2CCS883001R0821 | 13787 | 0.74 | 1 |
| 25 | 125 | S803C-D125 | 2CCS883001R0841 | 13947 | 0.74 | 1 |



20CC413273F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S804C-D10 | 2CCS884001R0101 | 12193 | 0.98 | 1 |
| 25 | 13 | S804C-D13 | 2CCS884001R0131 | 12353 | 0.98 | 1 |
| 25 | 16 | S804C-D16 | 2CCS884001R0161 | 12513 | 0.98 | 1 |
| 25 | 20 | S804C-D20 | 2CCS884001R0201 | 12674 | 0.98 | 1 |
| 25 | 25 | S804C-D25 | 2CCS884001R0251 | 12834 | 0.98 | 1 |
| 25 | 32 | S804C-D32 | 2CCS884001R0321 | 12995 | 0.98 | 1 |
| 25 | 40 | S804C-D40 | 2CCS884001R0401 | 13152 | 0.98 | 1 |
| 25 | 50 | S804C-D50 | 2CCS884001R0501 | 13312 | 0.98 | 1 |
| 25 | 63 | S804C-D63 | 2CCS884001R0631 | 13473 | 0.98 | 1 |
| 25 | 80 | S804C-D80 | 2CCS884001R0801 | 13633 | 0.98 | 1 |
| 25 | 100 | S804C-D100 | 2CCS884001R0821 | 13794 | 0.98 | 1 |
| 25 | 125 | S804C-D125 | 2CCS884001R0841 | 13954 | 0.98 | 1 |

S800C-K Characteristic K

$I_{cu} = 25 \text{ kA}$; with interchangeable cage terminal

1



2CC0413274F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 25 | 10 | S801C-K10 | 2CCS881001R0427 | 12209 | 0.25 | 1 |
| 25 | 13 | S801C-K13 | 2CCS881001R0447 | 12360 | 0.25 | 1 |
| 25 | 16 | S801C-K16 | 2CCS881001R0467 | 12520 | 0.25 | 1 |
| 25 | 20 | S801C-K20 | 2CCS881001R0487 | 12681 | 0.25 | 1 |
| 25 | 25 | S801C-K25 | 2CCS881001R0517 | 12841 | 0.25 | 1 |
| 25 | 32 | S801C-K32 | 2CCS881001R0537 | 13008 | 0.25 | 1 |
| 25 | 40 | S801C-K40 | 2CCS881001R0557 | 13169 | 0.25 | 1 |
| 25 | 50 | S801C-K50 | 2CCS881001R0577 | 13329 | 0.25 | 1 |
| 25 | 63 | S801C-K63 | 2CCS881001R0597 | 13480 | 0.25 | 1 |
| 25 | 80 | S801C-K80 | 2CCS881001R0627 | 13640 | 0.25 | 1 |
| 25 | 100 | S801C-K100 | 2CCS881001R0637 | 13800 | 0.25 | 1 |
| 25 | 125 | S801C-K125 | 2CCS881001R0647 | 13961 | 0.25 | 1 |



2CC0413275F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S802C-K10 | 2CCS882001R0427 | 12216 | 0.49 | 1 |
| 25 | 13 | S802C-K13 | 2CCS882001R0447 | 12377 | 0.49 | 1 |
| 25 | 16 | S802C-K16 | 2CCS882001R0467 | 12537 | 0.49 | 1 |
| 25 | 20 | S802C-K20 | 2CCS882001R0487 | 12698 | 0.49 | 1 |
| 25 | 25 | S802C-K25 | 2CCS882001R0517 | 12858 | 0.49 | 1 |
| 25 | 32 | S802C-K32 | 2CCS882001R0537 | 13015 | 0.49 | 1 |
| 25 | 40 | S802C-K40 | 2CCS882001R0557 | 13176 | 0.49 | 1 |
| 25 | 50 | S802C-K50 | 2CCS882001R0577 | 13336 | 0.49 | 1 |
| 25 | 63 | S802C-K63 | 2CCS882001R0597 | 13497 | 0.49 | 1 |
| 25 | 80 | S802C-K80 | 2CCS882001R0627 | 13657 | 0.49 | 1 |
| 25 | 100 | S802C-K100 | 2CCS882001R0637 | 13817 | 0.49 | 1 |
| 25 | 125 | S802C-K125 | 2CCS882001R0647 | 13978 | 0.49 | 1 |



2CC0413276F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S803C-K10 | 2CCS883001R0427 | 12223 | 0.74 | 1 |
| 25 | 13 | S803C-K13 | 2CCS883001R0447 | 12384 | 0.74 | 1 |
| 25 | 16 | S803C-K16 | 2CCS883001R0467 | 12544 | 0.74 | 1 |
| 25 | 20 | S803C-K20 | 2CCS883001R0487 | 12704 | 0.74 | 1 |
| 25 | 25 | S803C-K25 | 2CCS883001R0517 | 12865 | 0.74 | 1 |
| 25 | 32 | S803C-K32 | 2CCS883001R0537 | 13022 | 0.74 | 1 |
| 25 | 40 | S803C-K40 | 2CCS883001R0557 | 13183 | 0.74 | 1 |
| 25 | 50 | S803C-K50 | 2CCS883001R0577 | 13343 | 0.74 | 1 |
| 25 | 63 | S803C-K63 | 2CCS883001R0597 | 13503 | 0.74 | 1 |
| 25 | 80 | S803C-K80 | 2CCS883001R0627 | 13664 | 0.74 | 1 |
| 25 | 100 | S803C-K100 | 2CCS883001R0637 | 13824 | 0.74 | 1 |
| 25 | 125 | S803C-K125 | 2CCS883001R0647 | 13985 | 0.74 | 1 |



2CC0413277F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 25 | 10 | S804C-K10 | 2CCS884001R0427 | 12230 | 0.98 | 1 |
| 25 | 13 | S804C-K13 | 2CCS884001R0447 | 12391 | 0.98 | 1 |
| 25 | 16 | S804C-K16 | 2CCS884001R0467 | 12551 | 0.98 | 1 |
| 25 | 20 | S804C-K20 | 2CCS884001R0487 | 12711 | 0.98 | 1 |
| 25 | 25 | S804C-K25 | 2CCS884001R0517 | 12872 | 0.98 | 1 |
| 25 | 32 | S804C-K32 | 2CCS884001R0537 | 13039 | 0.98 | 1 |
| 25 | 40 | S804C-K40 | 2CCS884001R0557 | 13190 | 0.98 | 1 |
| 25 | 50 | S804C-K50 | 2CCS884001R0577 | 13350 | 0.98 | 1 |
| 25 | 63 | S804C-K63 | 2CCS884001R0597 | 13510 | 0.98 | 1 |
| 25 | 80 | S804C-K80 | 2CCS884001R0627 | 13671 | 0.98 | 1 |
| 25 | 100 | S804C-K100 | 2CCS884001R0637 | 13831 | 0.98 | 1 |
| 25 | 125 | S804C-K125 | 2CCS884001R0647 | 13992 | 0.98 | 1 |

S800B-B Characteristic B

$I_{CU} = 16 \text{ kA}$; with locked cage terminal



| I_{CU} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 16 | 32 | S801B-B32 | 2CCS811001R0325 | 15303 | 0.24 | 1 |
| 16 | 40 | S801B-B40 | 2CCS811001R0405 | 16539 | 0.24 | 1 |
| 16 | 50 | S801B-B50 | 2CCS811001R0505 | 16577 | 0.24 | 1 |
| 16 | 63 | S801B-B63 | 2CCS811001R0635 | 16614 | 0.24 | 1 |
| 16 | 80 | S801B-B80 | 2CCS811001R0805 | 16652 | 0.24 | 1 |
| 16 | 100 | S801B-B100 | 2CCS811001R0825 | 16690 | 0.24 | 1 |
| 16 | 125 | S801B-B125 | 2CCS811001R0845 | 16737 | 0.24 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S802B-B32 | 2CCS812001R0325 | 16508 | 0.49 | 1 |
| 16 | 40 | S802B-B40 | 2CCS812001R0405 | 16546 | 0.49 | 1 |
| 16 | 50 | S802B-B50 | 2CCS812001R0505 | 16584 | 0.49 | 1 |
| 16 | 63 | S802B-B63 | 2CCS812001R0635 | 16621 | 0.49 | 1 |
| 16 | 80 | S802B-B80 | 2CCS812001R0805 | 16669 | 0.49 | 1 |
| 16 | 100 | S802B-B100 | 2CCS812001R0825 | 16706 | 0.49 | 1 |
| 16 | 125 | S802B-B125 | 2CCS812001R0845 | 16744 | 0.49 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S803B-B32 | 2CCS813001R0325 | 16515 | 0.74 | 1 |
| 16 | 40 | S803B-B40 | 2CCS813001R0405 | 16553 | 0.74 | 1 |
| 16 | 50 | S803B-B50 | 2CCS813001R0505 | 16591 | 0.74 | 1 |
| 16 | 63 | S803B-B63 | 2CCS813001R0635 | 16638 | 0.74 | 1 |
| 16 | 80 | S803B-B80 | 2CCS813001R0805 | 16676 | 0.74 | 1 |
| 16 | 100 | S803B-B100 | 2CCS813001R0825 | 16713 | 0.74 | 1 |
| 16 | 125 | S803B-B125 | 2CCS813001R0845 | 16751 | 0.74 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S804B-B32 | 2CCS814001R0325 | 16522 | 0.98 | 1 |
| 16 | 40 | S804B-B40 | 2CCS814001R0405 | 16560 | 0.98 | 1 |
| 16 | 50 | S804B-B50 | 2CCS814001R0505 | 16607 | 0.98 | 1 |
| 16 | 63 | S804B-B63 | 2CCS814001R0635 | 16645 | 0.98 | 1 |
| 16 | 80 | S804B-B80 | 2CCS814001R0805 | 16683 | 0.98 | 1 |
| 16 | 100 | S804B-B100 | 2CCS814001R0825 | 16720 | 0.98 | 1 |
| 16 | 125 | S804B-B125 | 2CCS814001R0845 | 16768 | 0.98 | 1 |

S800B-C Characteristic C

$I_{cu} = 16 \text{ kA}$; with locked cage terminal

1



2CC0413398F001



2CC0413398F001



2CC0413370F001



2CC0413371F001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 16 | 32 | S801B-C32 | 2CCS811001R0324 | 16225 | 0.24 | 1 |
| 16 | 40 | S801B-C40 | 2CCS811001R0404 | 16263 | 0.24 | 1 |
| 16 | 50 | S801B-C50 | 2CCS811001R0504 | 16300 | 0.24 | 1 |
| 16 | 63 | S801B-C63 | 2CCS811001R0634 | 16348 | 0.24 | 1 |
| 16 | 80 | S801B-C80 | 2CCS811001R0804 | 16386 | 0.24 | 1 |
| 16 | 100 | S801B-C100 | 2CCS811001R0824 | 16423 | 0.24 | 1 |
| 16 | 125 | S801B-C125 | 2CCS811001R0844 | 16461 | 0.24 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S802B-C32 | 2CCS812001R0324 | 16232 | 0.49 | 1 |
| 16 | 40 | S802B-C40 | 2CCS812001R0404 | 16270 | 0.49 | 1 |
| 16 | 50 | S802B-C50 | 2CCS812001R0504 | 16317 | 0.49 | 1 |
| 16 | 63 | S802B-C63 | 2CCS812001R0634 | 16355 | 0.49 | 1 |
| 16 | 80 | S802B-C80 | 2CCS812001R0804 | 16393 | 0.49 | 1 |
| 16 | 100 | S802B-C100 | 2CCS812001R0824 | 16430 | 0.49 | 1 |
| 16 | 125 | S802B-C125 | 2CCS812001R0844 | 16478 | 0.49 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S803B-C32 | 2CCS813001R0324 | 16249 | 0.74 | 1 |
| 16 | 40 | S803B-C40 | 2CCS813001R0404 | 16287 | 0.74 | 1 |
| 16 | 50 | S803B-C50 | 2CCS813001R0504 | 16324 | 0.74 | 1 |
| 16 | 63 | S803B-C63 | 2CCS813001R0634 | 16362 | 0.74 | 1 |
| 16 | 80 | S803B-C80 | 2CCS813001R0804 | 16409 | 0.74 | 1 |
| 16 | 100 | S803B-C100 | 2CCS813001R0824 | 16447 | 0.74 | 1 |
| 16 | 125 | S803B-C125 | 2CCS813001R0844 | 16485 | 0.74 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S804B-C32 | 2CCS814001R0324 | 16256 | 0.98 | 1 |
| 16 | 40 | S804B-C40 | 2CCS814001R0404 | 16294 | 0.98 | 1 |
| 16 | 50 | S804B-C50 | 2CCS814001R0504 | 16331 | 0.98 | 1 |
| 16 | 63 | S804B-C63 | 2CCS814001R0634 | 16379 | 0.98 | 1 |
| 16 | 80 | S804B-C80 | 2CCS814001R0804 | 16416 | 0.98 | 1 |
| 16 | 100 | S804B-C100 | 2CCS814001R0824 | 16454 | 0.98 | 1 |
| 16 | 125 | S804B-C125 | 2CCS814001R0844 | 16492 | 0.98 | 1 |

S800B-D Characteristic D

$I_{CU} = 16 \text{ kA}$; with locked cage terminal



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 16 | 32 | S801B-D32 | 2CCS811001R0321 | 15945 | 0.24 | 1 |
| 16 | 40 | S801B-D40 | 2CCS811001R0401 | 15983 | 0.24 | 1 |
| 16 | 50 | S801B-D50 | 2CCS811001R0501 | 16027 | 0.24 | 1 |
| 16 | 63 | S801B-D63 | 2CCS811001R0631 | 16065 | 0.24 | 1 |
| 16 | 80 | S801B-D80 | 2CCS811001R0801 | 16102 | 0.24 | 1 |
| 16 | 100 | S801B-D100 | 2CCS811001R0821 | 16140 | 0.24 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S802B-D32 | 2CCS812001R0321 | 15952 | 0.49 | 1 |
| 16 | 40 | S802B-D40 | 2CCS812001R0401 | 15990 | 0.49 | 1 |
| 16 | 50 | S802B-D50 | 2CCS812001R0501 | 16034 | 0.49 | 1 |
| 16 | 63 | S802B-D63 | 2CCS812001R0631 | 16072 | 0.49 | 1 |
| 16 | 80 | S802B-D80 | 2CCS812001R0801 | 16119 | 0.49 | 1 |
| 16 | 100 | S802B-D100 | 2CCS812001R0821 | 16157 | 0.49 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S803B-D32 | 2CCS813001R0321 | 15969 | 0.74 | 1 |
| 16 | 40 | S803B-D40 | 2CCS813001R0401 | 16003 | 0.74 | 1 |
| 16 | 50 | S803B-D50 | 2CCS813001R0501 | 16041 | 0.74 | 1 |
| 16 | 63 | S803B-D63 | 2CCS813001R0631 | 16089 | 0.74 | 1 |
| 16 | 80 | S803B-D80 | 2CCS813001R0801 | 16126 | 0.74 | 1 |
| 16 | 100 | S803B-D100 | 2CCS813001R0821 | 16164 | 0.74 | 1 |



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S804B-D32 | 2CCS814001R0321 | 15976 | 0.98 | 1 |
| 16 | 40 | S804B-D40 | 2CCS814001R0401 | 16010 | 0.98 | 1 |
| 16 | 50 | S804B-D50 | 2CCS814001R0501 | 16058 | 0.98 | 1 |
| 16 | 63 | S804B-D63 | 2CCS814001R0631 | 16096 | 0.98 | 1 |
| 16 | 80 | S804B-D80 | 2CCS814001R0801 | 16133 | 0.98 | 1 |
| 16 | 100 | S804B-D100 | 2CCS814001R0821 | 16171 | 0.98 | 1 |

S800B-K Characteristic K

$I_{cu} = 16 \text{ kA}$; with locked cage terminal

1



20CC413968F0001



20CC413969F0001



20CC413970F0001



20CC413971F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 16 | 32 | S801B-K32 | 2CCS811001R0537 | 15600 | 0.24 | 1 |
| 16 | 40 | S801B-K40 | 2CCS811001R0557 | 15723 | 0.24 | 1 |
| 16 | 50 | S801B-K50 | 2CCS811001R0577 | 15730 | 0.24 | 1 |
| 16 | 63 | S801B-K63 | 2CCS811001R0597 | 15778 | 0.24 | 1 |
| 16 | 80 | S801B-K80 | 2CCS811001R0627 | 15815 | 0.24 | 1 |
| 16 | 100 | S801B-K100 | 2CCS811001R0637 | 15860 | 0.24 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S802B-K32 | 2CCS812001R0537 | 15709 | 0.49 | 1 |
| 16 | 40 | S802B-K40 | 2CCS812001R0557 | 16775 | 0.49 | 1 |
| 16 | 50 | S802B-K50 | 2CCS812001R0577 | 15747 | 0.49 | 1 |
| 16 | 63 | S802B-K63 | 2CCS812001R0597 | 15785 | 0.49 | 1 |
| 16 | 80 | S802B-K80 | 2CCS812001R0627 | 15822 | 0.49 | 1 |
| 16 | 100 | S802B-K100 | 2CCS812001R0637 | 15877 | 0.49 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S803B-K32 | 2CCS813001R0537 | 15716 | 0.74 | 1 |
| 16 | 40 | S803B-K40 | 2CCS813001R0557 | 16799 | 0.74 | 1 |
| 16 | 50 | S803B-K50 | 2CCS813001R0577 | 15754 | 0.74 | 1 |
| 16 | 63 | S803B-K63 | 2CCS813001R0597 | 15792 | 0.74 | 1 |
| 16 | 80 | S803B-K80 | 2CCS813001R0627 | 15846 | 0.74 | 1 |
| 16 | 100 | S803B-K100 | 2CCS813001R0637 | 15884 | 0.74 | 1 |

| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 16 | 32 | S804B-K32 | 2CCS814001R0537 | 16805 | 0.98 | 1 |
| 16 | 40 | S804B-K40 | 2CCS814001R0557 | 16812 | 0.98 | 1 |
| 16 | 50 | S804B-K50 | 2CCS814001R0577 | 15761 | 0.98 | 1 |
| 16 | 63 | S804B-K63 | 2CCS814001R0597 | 15808 | 0.98 | 1 |
| 16 | 80 | S804B-K80 | 2CCS814001R0627 | 15853 | 0.98 | 1 |
| 16 | 100 | S804B-K100 | 2CCS814001R0637 | 15891 | 0.98 | 1 |

S800HV-K Characteristic K

$I_{cu} = 4 \text{ kA}$ for voltages up to 1000 V AC



| I_{cu} [kA] | Rated current [A] | Order details Type code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|-------------------------|----------------|---------------|
| 4 | 6 | S801HV-K6 | 2CCF019005R0001 | 36445 | 0.27 | 1 |
| 4 | 8 | S801HV-K8 | 2CCF019006R0001 | 36964 | 0.27 | 1 |
| 4 | 10 | S801HV-K10 | 2CCF019007R0001 | 36452 | 0.27 | 1 |
| 4 | 13 | S801HV-K13 | 2CCF019008R0001 | 36469 | 0.27 | 1 |
| 4 | 16 | S801HV-K16 | 2CCF019009R0001 | 36476 | 0.27 | 1 |
| 4 | 20 | S801HV-K20 | 2CCF019010R0001 | 36483 | 0.27 | 1 |
| 4 | 25 | S801HV-K25 | 2CCF019011R0001 | 36490 | 0.27 | 1 |
| 4 | 32 | S801HV-K32 | 2CCF019012R0001 | 36605 | 0.27 | 1 |
| 4 | 40 | S801HV-K40 | 2CCF019013R0001 | 36612 | 0.27 | 1 |
| 4 | 50 | S801HV-K50 | 2CCF019014R0001 | 36629 | 0.27 | 1 |
| 4 | 63 | S801HV-K63 | 2CCF019015R0001 | 36636 | 0.27 | 1 |
| 3 | 80 | S801HV-K80 | 2CCF019016R0001 | 36643 | 0.27 | 1 |
| 3 | 100 | S801HV-K100 | 2CCF019017R0001 | 36650 | 0.27 | 1 |
| 3 | 125 | S801HV-K125 | 2CCF019018R0001 | 36667 | 0.27 | 1 |
| 4 | 6 | S802HV-K6 | 2CCF019019R0001 | 36674 | 0.54 | 1 |
| 4 | 8 | S802HV-K8 | 2CCF019020R0001 | 36681 | 0.54 | 1 |
| 4 | 10 | S802HV-K10 | 2CCF019021R0001 | 36698 | 0.54 | 1 |
| 4 | 13 | S802HV-K13 | 2CCF019022R0001 | 36704 | 0.54 | 1 |
| 4 | 16 | S802HV-K16 | 2CCF019023R0001 | 36711 | 0.54 | 1 |
| 4 | 20 | S802HV-K20 | 2CCF019024R0001 | 36728 | 0.54 | 1 |
| 4 | 25 | S802HV-K25 | 2CCF019025R0001 | 36742 | 0.54 | 1 |
| 4 | 32 | S802HV-K32 | 2CCF019026R0001 | 36759 | 0.54 | 1 |
| 4 | 40 | S802HV-K40 | 2CCF019027R0001 | 36766 | 0.54 | 1 |
| 4 | 50 | S802HV-K50 | 2CCF019028R0001 | 36773 | 0.54 | 1 |
| 4 | 63 | S802HV-K63 | 2CCF019029R0001 | 36780 | 0.54 | 1 |
| 3 | 80 | S802HV-K80 | 2CCF019030R0001 | 36797 | 0.54 | 1 |
| 3 | 100 | S802HV-K100 | 2CCF019031R0001 | 36803 | 0.54 | 1 |
| 3 | 125 | S802HV-K125 | 2CCF019032R0001 | 36810 | 0.54 | 1 |
| 4 | 6 | S803HV-K6 | 2CCF019033R0001 | 36827 | 0.81 | 1 |
| 4 | 8 | S803HV-K8 | 2CCF019034R0001 | 36834 | 0.81 | 1 |
| 4 | 10 | S803HV-K10 | 2CCF019035R0001 | 36841 | 0.81 | 1 |
| 4 | 13 | S803HV-K13 | 2CCF019036R0001 | 36858 | 0.81 | 1 |
| 4 | 16 | S803HV-K16 | 2CCF019037R0001 | 36865 | 0.81 | 1 |
| 4 | 20 | S803HV-K20 | 2CCF019038R0001 | 36872 | 0.81 | 1 |
| 4 | 25 | S803HV-K25 | 2CCF019039R0001 | 36889 | 0.81 | 1 |
| 4 | 32 | S803HV-K32 | 2CCF019040R0001 | 36896 | 0.81 | 1 |
| 4 | 40 | S803HV-K40 | 2CCF019041R0001 | 36902 | 0.81 | 1 |
| 4 | 50 | S803HV-K50 | 2CCF019042R0001 | 36919 | 0.81 | 1 |
| 4 | 63 | S803HV-K63 | 2CCF019043R0001 | 36926 | 0.81 | 1 |
| 3 | 80 | S803HV-K80 | 2CCF019044R0001 | 36933 | 0.81 | 1 |
| 3 | 100 | S803HV-K100 | 2CCF019045R0001 | 36940 | 0.81 | 1 |
| 3 | 125 | S803HV-K125 | 2CCF019046R0001 | 36957 | 0.81 | 1 |

S800U-K Characteristic K (UL489 certified)

$I_{cu} = 30 \text{ kA}$; with interchangeable cage terminal

1



2CCS413304F0002



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 30 | 10 | S801U-K10 | 2CCS881017R0427 | 14005 | 0.25 | 1 |
| 30 | 15 | S801U-K15 | 2CCS881017R0457 | 14043 | 0.25 | 1 |
| 30 | 20 | S801U-K20 | 2CCS881017R0487 | 14081 | 0.25 | 1 |
| 30 | 25 | S801U-K25 | 2CCS881017R0517 | 14128 | 0.25 | 1 |
| 30 | 30 | S801U-K30 | 2CCS881017R0527 | 14166 | 0.25 | 1 |
| 30 | 40 | S801U-K40 | 2CCS881017R0557 | 14203 | 0.25 | 1 |
| 30 | 50 | S801U-K50 | 2CCS881017R0577 | 14241 | 0.25 | 1 |
| 30 | 60 | S801U-K60 | 2CCS881017R0587 | 14289 | 0.25 | 1 |
| 30 | 70 | S801U-K70 | 2CCS881017R0707 | 14326 | 0.25 | 1 |
| 30 | 80 | S801U-K80 | 2CCS881017R0627 | 14364 | 0.25 | 1 |
| 30 | 90 | S801U-K90 | 2CCS881017R0907 | 14401 | 0.25 | 1 |
| 30 | 100 | S801U-K100 | 2CCS881017R0637 | 14449 | 0.25 | 1 |



2CCS413305F0002



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S802U-K10 | 2CCS862017R0427 | 14012 | 0.49 | 1 |
| 50 | 15 | S802U-K15 | 2CCS862017R0457 | 14050 | 0.49 | 1 |
| 50 | 20 | S802U-K20 | 2CCS862017R0487 | 14098 | 0.49 | 1 |
| 50 | 25 | S802U-K25 | 2CCS862017R0517 | 14135 | 0.49 | 1 |
| 50 | 30 | S802U-K30 | 2CCS862017R0527 | 14173 | 0.49 | 1 |
| 50 | 40 | S802U-K40 | 2CCS862017R0557 | 14210 | 0.49 | 1 |
| 50 | 50 | S802U-K50 | 2CCS862017R0577 | 14258 | 0.49 | 1 |
| 50 | 60 | S802U-K60 | 2CCS862017R0587 | 14296 | 0.49 | 1 |
| 50 | 70 | S802U-K70 | 2CCS862017R0707 | 14333 | 0.49 | 1 |
| 50 | 80 | S802U-K80 | 2CCS862017R0627 | 14371 | 0.49 | 1 |
| 50 | 90 | S802U-K90 | 2CCS862017R0907 | 14418 | 0.49 | 1 |
| 50 | 100 | S802U-K100 | 2CCS862017R0637 | 14456 | 0.49 | 1 |



2CCS413306F0002



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S803U-K10 | 2CCS863017R0427 | 14029 | 0.74 | 1 |
| 50 | 15 | S803U-K15 | 2CCS863017R0457 | 14067 | 0.74 | 1 |
| 50 | 20 | S803U-K20 | 2CCS863017R0487 | 14104 | 0.74 | 1 |
| 50 | 25 | S803U-K25 | 2CCS863017R0517 | 14142 | 0.74 | 1 |
| 50 | 30 | S803U-K30 | 2CCS863017R0527 | 14180 | 0.74 | 1 |
| 50 | 40 | S803U-K40 | 2CCS863017R0557 | 14227 | 0.74 | 1 |
| 50 | 50 | S803U-K50 | 2CCS863017R0577 | 14265 | 0.74 | 1 |
| 50 | 60 | S803U-K60 | 2CCS863017R0587 | 14302 | 0.74 | 1 |
| 50 | 70 | S803U-K70 | 2CCS863017R0707 | 14340 | 0.74 | 1 |
| 50 | 80 | S803U-K80 | 2CCS863017R0627 | 14388 | 0.74 | 1 |
| 50 | 90 | S803U-K90 | 2CCS863017R0907 | 14425 | 0.74 | 1 |
| 50 | 100 | S803U-K100 | 2CCS863017R0637 | 14463 | 0.74 | 1 |



2CCS413307F0002



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S804U-K10 | 2CCS864017R0427 | 14036 | 0.98 | 1 |
| 50 | 15 | S804U-K15 | 2CCS864017R0457 | 14074 | 0.98 | 1 |
| 50 | 20 | S804U-K20 | 2CCS864017R0487 | 14111 | 0.98 | 1 |
| 50 | 25 | S804U-K25 | 2CCS864017R0517 | 14159 | 0.98 | 1 |
| 50 | 30 | S804U-K30 | 2CCS864017R0527 | 14197 | 0.98 | 1 |
| 50 | 40 | S804U-K40 | 2CCS864017R0557 | 14234 | 0.98 | 1 |
| 50 | 50 | S804U-K50 | 2CCS864017R0577 | 14272 | 0.98 | 1 |
| 50 | 60 | S804U-K60 | 2CCS864017R0587 | 14319 | 0.98 | 1 |
| 50 | 70 | S804U-K70 | 2CCS864017R0707 | 14357 | 0.98 | 1 |
| 50 | 80 | S804U-K80 | 2CCS864017R0627 | 14395 | 0.98 | 1 |
| 50 | 90 | S804U-K90 | 2CCS864017R0907 | 14432 | 0.98 | 1 |
| 50 | 100 | S804U-K100 | 2CCS864017R0637 | 14470 | 0.98 | 1 |

S800U-Z Characteristic Z (UL489 certified)

$I_{CU} = 50 \text{ kA}$; with interchangeable cage terminal



2CCCA13315F0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 30 | 10 | S801U-Z10 | 2CCS881017R0105 | 14487 | 0.25 | 1 |
| 30 | 15 | S801U-Z15 | 2CCS881017R0155 | 14524 | 0.25 | 1 |
| 30 | 20 | S801U-Z20 | 2CCS881017R0205 | 14562 | 0.25 | 1 |
| 30 | 25 | S801U-Z25 | 2CCS881017R0255 | 14609 | 0.25 | 1 |
| 30 | 30 | S801U-Z30 | 2CCS881017R0305 | 14647 | 0.25 | 1 |
| 30 | 40 | S801U-Z40 | 2CCS881017R0405 | 14685 | 0.25 | 1 |
| 30 | 50 | S801U-Z50 | 2CCS881017R0505 | 14722 | 0.25 | 1 |
| 30 | 60 | S801U-Z60 | 2CCS881017R0605 | 14760 | 0.25 | 1 |
| 30 | 70 | S801U-Z70 | 2CCS881017R0705 | 14807 | 0.25 | 1 |
| 30 | 80 | S801U-Z80 | 2CCS881017R0805 | 14845 | 0.25 | 1 |
| 30 | 90 | S801U-Z90 | 2CCS881017R0905 | 14883 | 0.25 | 1 |
| 30 | 100 | S801U-Z100 | 2CCS881017R0825 | 14920 | 0.25 | 1 |



2CCCA13316F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S802U-Z10 | 2CCS862017R0105 | 14494 | 0.49 | 1 |
| 50 | 15 | S802U-Z15 | 2CCS862017R0155 | 14531 | 0.49 | 1 |
| 50 | 20 | S802U-Z20 | 2CCS862017R0205 | 14579 | 0.49 | 1 |
| 50 | 25 | S802U-Z25 | 2CCS862017R0255 | 14616 | 0.49 | 1 |
| 50 | 30 | S802U-Z30 | 2CCS862017R0305 | 14654 | 0.49 | 1 |
| 50 | 40 | S802U-Z40 | 2CCS862017R0405 | 14692 | 0.49 | 1 |
| 50 | 50 | S802U-Z50 | 2CCS862017R0505 | 14739 | 0.49 | 1 |
| 50 | 60 | S802U-Z60 | 2CCS862017R0605 | 14777 | 0.49 | 1 |
| 50 | 70 | S802U-Z70 | 2CCS862017R0705 | 14814 | 0.49 | 1 |
| 50 | 80 | S802U-Z80 | 2CCS862017R0805 | 14852 | 0.49 | 1 |
| 50 | 90 | S802U-Z90 | 2CCS862017R0905 | 14890 | 0.49 | 1 |
| 50 | 100 | S802U-Z100 | 2CCS862017R0825 | 14937 | 0.49 | 1 |



2CCCA13317F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S803U-Z10 | 2CCS863017R0105 | 14500 | 0.74 | 1 |
| 50 | 15 | S803U-Z15 | 2CCS863017R0155 | 14548 | 0.74 | 1 |
| 50 | 20 | S803U-Z20 | 2CCS863017R0205 | 14586 | 0.74 | 1 |
| 50 | 25 | S803U-Z25 | 2CCS863017R0255 | 14623 | 0.74 | 1 |
| 50 | 30 | S803U-Z30 | 2CCS863017R0305 | 14661 | 0.74 | 1 |
| 50 | 40 | S803U-Z40 | 2CCS863017R0405 | 14708 | 0.74 | 1 |
| 50 | 50 | S803U-Z50 | 2CCS863017R0505 | 14746 | 0.74 | 1 |
| 50 | 60 | S803U-Z60 | 2CCS863017R0605 | 14784 | 0.74 | 1 |
| 50 | 70 | S803U-Z70 | 2CCS863017R0705 | 14821 | 0.74 | 1 |
| 50 | 80 | S803U-Z80 | 2CCS863017R0805 | 14869 | 0.74 | 1 |
| 50 | 90 | S803U-Z90 | 2CCS863017R0905 | 14906 | 0.74 | 1 |
| 50 | 100 | S803U-Z100 | 2CCS863017R0825 | 14944 | 0.74 | 1 |



2CCCA13318F0001



| | | | | | | |
|----|-----|------------|-----------------|-------|------|---|
| 50 | 10 | S804U-Z10 | 2CCS864017R0105 | 14517 | 0.98 | 1 |
| 50 | 15 | S804U-Z15 | 2CCS864017R0155 | 14555 | 0.98 | 1 |
| 50 | 20 | S804U-Z20 | 2CCS864017R0205 | 14593 | 0.98 | 1 |
| 50 | 25 | S804U-Z25 | 2CCS864017R0255 | 14630 | 0.98 | 1 |
| 50 | 30 | S804U-Z30 | 2CCS864017R0305 | 14678 | 0.98 | 1 |
| 50 | 40 | S804U-Z40 | 2CCS864017R0405 | 14715 | 0.98 | 1 |
| 50 | 50 | S804U-Z50 | 2CCS864017R0505 | 14753 | 0.98 | 1 |
| 50 | 60 | S804U-Z60 | 2CCS864017R0605 | 14791 | 0.98 | 1 |
| 50 | 70 | S804U-Z70 | 2CCS864017R0705 | 14838 | 0.98 | 1 |
| 50 | 80 | S804U-Z80 | 2CCS864017R0805 | 14876 | 0.98 | 1 |
| 50 | 90 | S804U-Z90 | 2CCS864017R0905 | 14913 | 0.98 | 1 |
| 50 | 100 | S804U-Z100 | 2CCS864017R0825 | 14951 | 0.98 | 1 |

S804U-UCZ (UL489 certified)

$I_{cu}=10$ kA for voltages up to 600 V DC

1



2CCS413373F0001

| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| 10 | 10 | S804U-UCZ10 | 2CCS248356R0001 | 420703 | 0.98 | 1 |
| 10 | 15 | S804U-UCZ15 | 2CCS248357R0001 | 420710 | 0.98 | 1 |
| 10 | 20 | S804U-UCZ20 | 2CCS248358R0001 | 420727 | 0.98 | 1 |
| 10 | 25 | S804U-UCZ25 | 2CCS248359R0001 | 420734 | 0.98 | 1 |
| 10 | 30 | S804U-UCZ30 | 2CCS248360R0001 | 420741 | 0.98 | 1 |
| 10 | 40 | S804U-UCZ40 | 2CCS248361R0001 | 420758 | 0.98 | 1 |
| 10 | 50 | S804U-UCZ50 | 2CCS248362R0001 | 420765 | 0.98 | 1 |
| 10 | 60 | S804U-UCZ60 | 2CCS248363R0001 | 420772 | 0.98 | 1 |
| 10 | 70 | S804U-UCZ70 | 2CCS248364R0001 | 420789 | 0.98 | 1 |
| 10 | 80 | S804U-UCZ80 | 2CCS248365R0001 | 420796 | 0.98 | 1 |

S800PV-S Characteristic PV-S* (used in photovoltaic systems) Photovoltaic string protection with interchangeable cage terminal



2CCC413248F0001



| I_{cu} [kA] | Rated current | | Order details | Order code | GTIN EAN | Weight | Pack. |
|------------------|---------------|-------------|-----------------|------------|----------|--------|-------|
| | [A] | Type Code | | 76122712 | [kg] | unit | |
| 5 | 10 | S802PV-S10 | 2CCP842001R1109 | 10939 | 0.49 | 1 | |
| 5 | 13 | S802PV-S13 | 2CCP842001R1139 | 10946 | 0.49 | 1 | |
| 5 | 16 | S802PV-S16 | 2CCP842001R1169 | 10953 | 0.49 | 1 | |
| 5 | 20 | S802PV-S20 | 2CCP842001R1209 | 10960 | 0.49 | 1 | |
| 5 | 25 | S802PV-S25 | 2CCP842001R1259 | 10977 | 0.49 | 1 | |
| 5 | 32 | S802PV-S32 | 2CCP842001R1329 | 10984 | 0.49 | 1 | |
| 5 | 40 | S802PV-S40 | 2CCP842001R1409 | 10991 | 0.49 | 1 | |
| 5 | 50 | S802PV-S50 | 2CCP842001R1509 | 11004 | 0.49 | 1 | |
| 5 | 63 | S802PV-S63 | 2CCP842001R1639 | 11011 | 0.49 | 1 | |
| 5 | 80 | S802PV-S80 | 2CCP842001R1809 | 11028 | 0.49 | 1 | |
| 5 | 100 | S802PV-S100 | 2CCP842001R1829 | 14968 | 0.49 | 1 | |
| 5 | 125 | S802PV-S125 | 2CCP842001R1849 | 14999 | 0.49 | 1 | |



2CCC413247F0001



| | | | | | | |
|---|-----|-------------|-----------------|-------|------|---|
| 5 | 10 | S803PV-S10 | 2CCP843001R1109 | 11035 | 0.74 | 1 |
| 5 | 13 | S803PV-S13 | 2CCP843001R1139 | 11042 | 0.74 | 1 |
| 5 | 16 | S803PV-S16 | 2CCP843001R1169 | 11059 | 0.74 | 1 |
| 5 | 20 | S803PV-S20 | 2CCP843001R1209 | 11066 | 0.74 | 1 |
| 5 | 25 | S803PV-S25 | 2CCP843001R1259 | 11073 | 0.74 | 1 |
| 5 | 32 | S803PV-S32 | 2CCP843001R1329 | 11080 | 0.74 | 1 |
| 5 | 40 | S803PV-S40 | 2CCP843001R1409 | 11097 | 0.74 | 1 |
| 5 | 50 | S803PV-S50 | 2CCP843001R1509 | 11103 | 0.74 | 1 |
| 5 | 63 | S803PV-S63 | 2CCP843001R1639 | 11110 | 0.74 | 1 |
| 5 | 80 | S803PV-S80 | 2CCP843001R1809 | 11127 | 0.74 | 1 |
| 5 | 100 | S803PV-S100 | 2CCP843001R1829 | 14975 | 0.74 | 1 |
| 5 | 125 | S803PV-S125 | 2CCP843001R1849 | 15002 | 0.74 | 1 |



2CCC413248F0001



| | | | | | | |
|---|-----|-------------|-----------------|-------|------|---|
| 5 | 10 | S804PV-S10 | 2CCP844001R1109 | 11134 | 0.98 | 1 |
| 5 | 13 | S804PV-S13 | 2CCP844001R1139 | 11141 | 0.98 | 1 |
| 5 | 16 | S804PV-S16 | 2CCP844001R1169 | 11158 | 0.98 | 1 |
| 5 | 20 | S804PV-S20 | 2CCP844001R1209 | 11165 | 0.98 | 1 |
| 5 | 25 | S804PV-S25 | 2CCP844001R1259 | 11172 | 0.98 | 1 |
| 5 | 32 | S804PV-S32 | 2CCP844001R1329 | 11189 | 0.98 | 1 |
| 5 | 40 | S804PV-S40 | 2CCP844001R1409 | 11196 | 0.98 | 1 |
| 5 | 50 | S804PV-S50 | 2CCP844001R1509 | 11202 | 0.98 | 1 |
| 5 | 63 | S804PV-S63 | 2CCP844001R1639 | 11219 | 0.98 | 1 |
| 5 | 80 | S804PV-S80 | 2CCP844001R1809 | 11226 | 0.98 | 1 |
| 5 | 100 | S804PV-S100 | 2CCP844001R1829 | 14982 | 0.98 | 1 |
| 5 | 125 | S804PV-S125 | 2CCP844001R1849 | 15019 | 0.98 | 1 |

Detailed information regarding the use of S800PV breakers in photovoltaic systems is available in the Technical catalogue 'S800PV Photovoltaic 2CCC413002C0204'

S800PV-M* (used in photovoltaic systems)

Photovoltaic disconnecter with interchangeable cage terminal

1



2CCC413249F0001



| I_{cw} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|------------------|----------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| 1.5 | 32 | S802PV-M32 | 2CCP812001R1329 | 11233 | 0.43 | 1 |
| 1.5 | 63 | S802PV-M63 | 2CCD842001R1590 | 15026 | 0.43 | 1 |
| 1.5 | 125 | S802PV-M125 | 2CCP812001R1849 | 11240 | 0.43 | 1 |



2CCC413259F0001



| | | | | | | |
|-----|-----|-------------|-----------------|-------|------|---|
| 1.5 | 32 | S803PV-M32 | 2CCP813001R1329 | 11257 | 0.65 | 1 |
| 1.5 | 63 | S803PV-M63 | 2CCD843001R1590 | 15033 | 0.65 | 1 |
| 1.5 | 125 | S803PV-M125 | 2CCP813001R1849 | 11264 | 0.65 | 1 |



2CCC413259F0001



| | | | | | | |
|-----|-----|-------------|-----------------|-------|------|---|
| 1.5 | 32 | S804PV-M32 | 2CCP814001R1329 | 11271 | 0.86 | 1 |
| 1.5 | 63 | S804PV-M63 | 2CCD844001R1590 | 15040 | 0.86 | 1 |
| 1.5 | 125 | S804PV-M125 | 2CCP814001R1849 | 11288 | 0.86 | 1 |

Detailed information regarding the use of S800PV breakers in photovoltaic systems is available in the Technical catalogue 'S800PV Photovoltaic 2CCC413002C0204'

S802PV-M-H* (used in photovoltaic systems) Photovoltaic 2-pole disconnecter (polarized)



2CCP2413379R0001



| I_{ow} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|--------------------------------------|------------------------------------|--|-------------------|-----------------------------------|------------------------------|-----------------------------|
| 1.5 | 32 | S802PV-M32-H | 2CCP247204R0001 | 419035 | 0.43 | 1 |
| 1.5 | 63 | S802PV-M63-H | 2CCP247205R0001 | 419042 | 0.43 | 1 |
| 1.5 | 100 | S802PV-M100-H | 2CCP247212R0001 | 419301 | 0.43 | 1 |

1

Detailed information regarding the use of S800PV breakers in photovoltaic systems is available in the Technical catalogue 'S800PV Photovoltaic 2CCC413002C0204'

S804U-PVS* (UL489B certified, used in photovoltaic systems) Ground fault detector interrupter (GFDI)

1



2CCC413079F0001

| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|--------------------------------------|------------------------------------|--|-------------------|-----------------------------------|------------------------------|-----------------------------|
| 3 | 5 | S804U-PVS5 | 2CCP824017R1159 | 419929 | 0.98 | 1 |

* Detailed information regarding the use of S800PV breakers in photovoltaic systems is available in the Technical catalogue 'S800PV Photovoltaic 2CCC413002C0204'

S800 Accessories



2CCS413069F0001



| Auxiliary contact | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|-------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| Auxiliary contact | S800-AUX | 2CCS800900R0011 | 1206802 | 0.05 | 1 |



2CCS413070F0001



| Combined auxiliary and signal contact | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|---------------------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| Auxiliary/signal contact | S800-AUX/ALT | 2CCS800900R0021 | 1206819 | 0.05 | 1 |



2CCS413067F0001

| Disconnectable neutral conductor 63 A | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|---------------------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| Disconnectable neutral conductor 63 A | S800-NT | 2CCS800900R0061 | 1208196 | 0.12 | 1 |



2CCS413353F0001

| Remote Switching Unit * | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|----------------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| Remote Switching Unit S800-RSU-H | S800-RSU-H | 2CCS800900R0501 | 1411244 | 0.3 | 1 |
| Remote Switching Unit S800W-RSU | S800W-RSU | 2CCS800900R0511 | 1411169 | 0.3 | 1 |

*High performance circuit breaker is not included in delivery



2CCS413357F0001

| S800-RSU cable incl. plug | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|--------------------|----------------|---------------|
| 3 meters cable 0,5 mm ² (AWG20) incl. 10-pole Micro Fit 3.0 plug | S800-RSU-CP | 2CCS800900R0541 | 1412869 | 0.35 | 1 |

| 10-pole Micro Fit 3.0 plug | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 10-pole Micro Fit 3.0 plug | S800-RSU-P | 2CCS800900R0551 | 1412845 | 0.00 | 1 |

S800 Accessories

1



2CC0413019F0002



| Short-circuit current with interchangeable cage terminal | Order details | Order code | GTIN EAN | Weight | Pack. |
|--|---------------|-----------------|----------|--------|-------|
| [A] | Type Code | | 7612271 | [kg] | unit |
| 32 | S803S-SCL32 | 2CCS800900R0291 | 1208912 | 0.74 | 1 |
| 63 | S803S-SCL63 | 2CCS800900R0301 | 1208929 | 0.74 | 1 |
| 125 | S803S-SCL125 | 2CCS800900R0281 | 1208905 | 0.74 | 1 |




2CC0413020F0001



| Short-circuit current limiter with interchangeable ring terminal connection | Order details | Order code | GTIN EAN | Weight | Pack. |
|---|----------------|-----------------|----------|--------|-------|
| [A] | Type Code | | 761227 | [kg] | unit |
| 32 | S803S-SCL32-R | 2CCS800900R0332 | 1408916 | 0.74 | 1 |
| 63 | S803S-SCL63-R | 2CCS800900R0331 | 1208950 | 0.74 | 1 |
| 125 | S803S-SCL125-R | 2CCS800900R0311 | 1208936 | 0.74 | 1 |




2CC041028F0001



| Self-resetting short-circuit limiter IEC version | Order details | Order code | GTIN EAN | Weight | Pack. |
|--|-----------------|-----------------|----------|--------|-------|
| [A] | Type Code | | 7612271 | [kg] | unit |
| 32 | S801S-SCL32-SR | 2CCS801901R0539 | 412012 | 0.25 | 1 |
| 63 | S801S-SCL63-SR | 2CCS801901R0599 | 412036 | 0.25 | 1 |
| 100 | S801S-SCL100-SR | 2CCS801901R0639 | 411992 | 0.25 | 1 |
| 32 | S802S-SCL32-SR | 2CCS802901R0539 | 412074 | 0.5 | 1 |
| 63 | S802S-SCL63-SR | 2CCS802901R0599 | 412098 | 0.5 | 1 |
| 100 | S802S-SCL100-SR | 2CCS802901R0639 | 412050 | 0.5 | 1 |
| 32 | S803S-SCL32-SR | 2CCS803901R0539 | 411930 | 0.75 | 1 |
| 63 | S803S-SCL63-SR | 2CCS803901R0599 | 411947 | 0.75 | 1 |
| 100 | S803S-SCL100-SR | 2CCS803901R0639 | 411954 | 0.75 | 1 |



2CC041038F0001



| Self-resetting short-circuit limiter World version (IEC/UL) | Order details | Order code | GTIN EAN | Weight | Pack. |
|---|-----------------|-----------------|----------|--------|-------|
| [A] | Type Code | | 7612271 | [kg] | unit |
| 32 | S803W-SCL32-SR | 2CCS803917R0539 | 412319 | 0.75 | 1 |
| 63 | S803W-SCL63-SR | 2CCS803917R0599 | 412326 | 0.75 | 1 |
| 100 | S803W-SCL100-SR | 2CCS803917R0639 | 412302 | 0.75 | 1 |

S800 Accessories



20CC0413403F0001

| Self-resetting short-circuit limiter [A] | Order details Type code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|-------------------------|----------------|---------------|
| 32 | S803HV-SCL32-SR | 2CCF019047R0001 | 37008 | 0.75 | 1 |
| 63 | S803HV-SCL63-SR | 2CCF019048R0001 | 37107 | 0.75 | 1 |
| 100 | S803HV-SCL100-SR | 2CCF019049R0001 | 37114 | 0.75 | 1 |



20CC0413239F0001



| Shunt operation release | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|--------------------|----------------|---------------|
| Shunt operat. release 12 VAC/DC | S800-SOR12 | 2CCS800900R0201 | 1212070 | 0.15 | 1 |
| Shunt operat. release 24 VAC/DC | S800-SOR24 | 2CCS800900R0191 | 1208318 | 0.15 | 1 |
| Shunt operat. release 48...130 VAC/DC | S800-SOR130 | 2CCS800900R0221 | 1208349 | 0.15 | 1 |
| Shunt operat. release 110...250 VAC/DC | S800-SOR250 | 2CCS800900R0211 | 1208332 | 0.15 | 1 |
| Shunt operat. release 220...400 VAC/DC | S800-SOR400 | 2CCS800900R0231 | 1208356 | 0.15 | 1 |



20CC0413240F0001



| Undervoltage release | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|---------------------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| Undervoltage release 24...36 VAC/DC | S800-UVR36 | 2CCS800900R0241 | 1208363 | 0.15 | 1 |
| Undervoltage release 48...60 VAC/DC | S800-UVR60 | 2CCS800900R0251 | 1208370 | 0.15 | 1 |
| Undervoltage release 110...130 VAC/DC | S800-UVR130 | 2CCS800900R0261 | 1208387 | 0.15 | 1 |
| Undervoltage release 220...250 VAC/DC | S800-UVR250 | 2CCS800900R0271 | 1208394 | 0.15 | 1 |



20CC0413061F0002

| Rotary drive adapter for 2- to 4-pole high performance MCB | Order details Type Code | Order code | GTIN EAN 80156446 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|----------------------|----------------|---------------|
| Rotary drive | S800-RD | 2CCS800900R0041 | 25764 | 0.08 | 1 |



20CC0413025F0001

| Anthracite/Standard rotary handle for door assembly | Order details Type Code | Order code | GTIN EAN 80156446 | Weight [kg] | Pack. unit |
|---|----------------------------|-----------------|----------------------|----------------|---------------|
| Anthracite rotary handle | S800-RHE-H | 1SDA060150R0001 | 25571 | 0.21 | 1 |

S800 Accessories

1



2CC0413068F0001

| Red/Emergency rotary handle for door assembly | Order details | Order code | GTIN EAN | Weight | Pack. |
|---|---------------|-----------------|----------|--------|-------|
| | Type Code | | 80156446 | [kg] | unit |
| Red rotary handle | S800-RHE-EM | 1SDA060151R0001 | 25771 | 0.21 | 1 |



2CC0413068F0001

| Axle extension Rotary drive-rotary handle 6 x 6 mm | Order details | Order code | GTIN EAN | Weight | Pack. |
|--|---------------|-----------------|----------|--------|-------|
| | Type Code | | 80156446 | [kg] | unit |
| Axial extension 500 mm | S800-RHE-S | 1SDA060179R0001 | 26242 | 0.2 | 1 |



2CC0413068F0001

| IP54 kit for door mounting | Order details | Order code | GTIN EAN | Weight | Pack. |
|----------------------------|---------------|-----------------|----------|--------|-------|
| | Type Code | | 80156446 | [kg] | unit |
| IP54 Kit | S800-RHE-IP54 | 1SDA060180R0001 | 26259 | 0.08 | 1 |

| Intermediate piece 9 mm | Order details | Order code | GTIN EAN | Weight | Pack. |
|-------------------------|---------------|-----------------|----------|--------|-------|
| | Type Code | | 76122712 | [kg] | unit |
| Intermediate piece 9 mm | S800-IP9 | 2CCS800900R0031 | 08202 | 0.01 | 1 |



2CC0413068F0001

| Padlock lever lock with hasp | Order details | Order code | GTIN EAN | Weight | Pack. |
|-----------------------------------|---------------|-----------------|----------|--------|-------|
| | Type Code | | 76122712 | [kg] | unit |
| Padlock lever lock with hasp 4 mm | S800-PLL | 2CCS800900R0051 | 08189 | 0.12 | 10 |



2CC0413068F0001

| UL locking device* | Order details | Order code | GTIN EAN | Weight | Pack. |
|--------------------|---------------|-----------------|----------|--------|-------|
| | Type Code | | 76122712 | [kg] | unit |
| UL locking device | S800U-PLL | 2CCS800017R0001 | 15057 | 0.02 | 1 |

*High performance circuit breaker and lockout tag are not included in delivery

S800 Accessories



2CCCA13045F0001



2CCCA13046F0004



2CCCA13057F0001



2CCCA13058F0001



2CCCA13059F0001



2CCCA13254F0001

| Interchangeable adapter kit | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|-----------------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| Cage terminal | S800-CT2125 | 2CCS800900R0181 | 12049 | 0.03 | 2 |
| Cage terminal | S800-CT4125 | 2CCS800900R0151 | 12032 | 0.06 | 4 |

| Interchangeable adapter kit | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|-----------------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| Ring terminal connection | S800-RT2125 | 2CCS800900R0161 | 08240 | 0.03 | 2 |
| Ring terminal connection | S800-RT4125 | 2CCS800900R0131 | 08219 | 0.06 | 4 |

| Busbar | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|----------------------|----------------|---------------|
| Busbar 250 A with 24 contacts pins, 3P | S803-BB250 | 2CCS800900R0071 | 08288 | 1.5 | 1 |

| Busbar | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|--|----------------------------|-----------------|----------------------|----------------|---------------|
| Busbar 250 A with 24 contacts pins, 3P+N | S804-BB250 | 2CCF019568R0001 | 41807 | 2 | 1 |
| Busbar 250 A with 6 contacts pins, 3P | S803-BB6 | 2CCF019562R0001 | 41302 | 0.375 | 1 |

| Feed block | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|-----------------------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| Feed block 120 mm ² 3P | S803-BBPC120 | 2CCS800900R0101 | 08301 | 0.46 | 1 |

| Feed block | Order details Type Code | Order code | GTIN EAN 76122714 | Weight [kg] | Pack. unit |
|-----------------------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| Feed block 4p 120 mm ² | S804-BBPC120 | 2CCF019569R0001 | 41814 | 0.58 | 1 |

| Contact-protection cover | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|--------------------------|----------------------------|-----------------|----------------------|----------------|---------------|
| Contact-protection cover | S800-BBIC | 2CCS800900R0081 | 08967 | 0.02 | 12 |

| End cap | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|---------|----------------------------|-----------------|----------------------|----------------|---------------|
| End cap | S800-END | 2CCS800900R0091 | 08295 | 0.04 | 10 |

| Pole connector | Order details Type Code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|----------------------|----------------------------|-----------------|---------------------|----------------|---------------|
| Pole connector 50 A | S802-LINK50 | 2CCS800900R0411 | 211295 | 0.03 | 10 |
| Pole connector 125 A | S802-LINK125 | 2CCS800900R0562 | 419103 | 0.15 | 2 |

S800 Accessories

1



2CCS800900R0121

| S800-ILS | Order details Type Code | Order code | GTIN EAN 76122712 | Weight [kg] | Pack. unit |
|---|----------------------------|-----------------|----------------------|----------------|---------------|
| Identification labeling system 168x6x11.5 mm | S800-ILS | 2CCS800900R0121 | 08271 | 0.01 | 1 |



2CCCA81032R0001

| Description | Order details Type code | Order code | GTIN EAN 7612271 | Weight [kg] | Pack. unit |
|---|----------------------------|-----------------|---------------------|----------------|---------------|
| Sensors 18 mm for S800 installation devices with cage terminals | | | | | |
| 80 A | CMS-100S8 | 2CCA880124R0001 | 426552 | 0.014 | 1 |
| 40 A | CMS-101S8 | 2CCA880125R0001 | 426569 | 0.014 | 1 |
| 20 A | CMS-102S8 | 2CCA880126R0001 | 426576 | 0.014 | 1 |



2CCCA81034R0001

| Sensors 25 mm for S800 installation devices with cage terminals | | | | | |
|---|-----------|-----------------|--------|-------|---|
| 160 A | CMS-200S8 | 2CCA880136R0001 | 426644 | 0.028 | 1 |
| 80 A | CMS-201S8 | 2CCA880137R0001 | 426651 | 0.028 | 1 |
| 40 A | CMS-202S8 | 2CCA880138R0001 | 426668 | 0.028 | 1 |

Sensors 25 mm DIN-Rail mounting (universal use)

| | | | | | |
|-------|-----------|-----------------|--------|-------|---|
| 160 A | CMS-200DR | 2CCA880132R0001 | 426675 | 0.030 | 1 |
| 80 A | CMS-201DR | 2CCA880133R0001 | 426682 | 0.030 | 1 |
| 40 A | CMS-202DR | 2CCA880134R0001 | 426699 | 0.030 | 1 |

Sensors 25 mm for cable mounting (universal use)

| | | | | | |
|-------|-----------|-----------------|--------|-------|---|
| 160 A | CMS-200CA | 2CCA880117R0001 | 426705 | 0.026 | 1 |
| 80 A | CMS-201CA | 2CCA880118R0001 | 426712 | 0.026 | 1 |
| 40 A | CMS-202CA | 2CCA880119R0001 | 426729 | 0.026 | 1 |

Control Unit (24VDC)

| | | | | | |
|------------|---------|-----------------|--------|-------|---|
| Modbus RTU | CMS-600 | 2CCA880000R0001 | 418700 | 0.153 | 1 |
|------------|---------|-----------------|--------|-------|---|

Accessories

| | | | | | |
|----------------|---------|-----------------|--------|-------|----|
| Flat cable 2 m | CMS-800 | 2CCA880148R0001 | 419233 | 0.017 | 1 |
| Flat cable 3 m | CMS-801 | 2CCA880149R0001 | 424428 | 0.025 | 1 |
| Connector set | CMS-820 | 2CCA880145R0001 | 419240 | 0.024 | 35 |



2CCCA81070R0001

S800 Accessories

Assignment of the FI protection devices

| Type A | Type AC | Type AS | Type A-AP-R |
|-------------------------|-------------------------------|-------------------------------------|--|
| Pulse current sensitive | Alternating current sensitive | Pulse current sensitive | Pulse current sensitive |
| FI protection device | FI protection device | FI protection device (selective) | FI protection device (short-time delay) |



2CC04193051F0001

| Quantity | Rated current [A] | Order details Type Code | Type | I _{Δn} | Order | GTIN EAN 801254 | Weight [kg] | Pack. unit |
|----------|-------------------|----------------------------|--------|-----------------|-----------------|-----------------------|-------------|------------|
| | | | | | | | | |
| 2 | 63 | DDA802AC-63/0.03 | AC | 0.03 | 2CSB802001R1630 | 2919704 | 0.3 | 1 |
| 2 | 63 | DDA802AC-63/0.3 | AC | 0.3 | 2CSB802001R3630 | 2919902 | 0.3 | 1 |
| 2 | 63 | DDA802A-63/0.03 | A | 0.03 | 2CSB802101R1630 | 2920007 | 0.3 | 1 |
| 2 | 63 | DDA802A-63/0.3 | A | 0.3 | 2CSB802101R3630 | 2920205 | 0.3 | 1 |
| 2 | 63 | DDA802A-63/0.5 | A | 0.5 | 2CSB802101R4630 | 2920403 | 0.3 | 1 |
| 2 | 63 | DDA802AS-63/0.3 | AS | 0.3 | 2CSB802201R3630 | 2920601 | 0.3 | 1 |
| 2 | 63 | DDA802AS-63/1 | AS | 1 | 2CSB802201R5630 | 2920809 | 0.3 | 1 |
| 2 | 63 | DDA802A-63/0.03AP-R | A-AP-R | 0.03 | 2CSB802401R1630 | 2921400 | 0.3 | 1 |
| 2 | 100 | DDA802A-100/0.3 | A | 0.3 | 2CSB802101R3000 | 2545033 | 0.42 | 1 |
| 2 | 100 | DDA802A-100/0.5 | A | 0.5 | 2CSB802101R4000 | 2542636 | 0.42 | 1 |
| 2 | 100 | DDA802AS-100/0.3 | AS | 0.3 | 2CSB802201R3000 | 2542537 | 0.42 | 1 |
| 2 | 100 | DDA802AS-100/1 | AS | 1 | 2CSB802201R5000 | 2547433 | 0.42 | 1 |
| 2 | 100 | DDA802A-100/0.03AP-R | A-AP-R | 0.03 | 2CSB802401R1000 | 2544630 | 0.42 | 1 |



2CC04193052F0001

| | | | | | | | | |
|---|-----|----------------------|--------|------|-----------------|---------|------|---|
| 3 | 63 | DDA803AC-63/0.03 | AC | 0.03 | 2CSB803001R1630 | 2922001 | 0.4 | 1 |
| 3 | 63 | DDA803AC-63/0.3 | AC | 0.3 | 2CSB803001R3630 | 2922209 | 0.4 | 1 |
| 3 | 63 | DDA803A-63/0.03 | A | 0.03 | 2CSB803101R1630 | 2922308 | 0.4 | 1 |
| 3 | 63 | DDA803A-63/0.3 | A | 0.3 | 2CSB803101R3630 | 2922506 | 0.4 | 1 |
| 3 | 63 | DDA803A-63/0.5 | A | 0.5 | 2CSB803101R4630 | 2922704 | 0.4 | 1 |
| 3 | 63 | DDA803AS-63/0.3 | AS | 0.3 | 2CSB803201R3630 | 2922902 | 0.4 | 1 |
| 3 | 63 | DDA803AS-63/1 | AS | 1 | 2CSB803201R5630 | 2923206 | 0.4 | 1 |
| 3 | 63 | DDA803A-63/0.03AP-R | A-AP-R | 0.03 | 2CSB803401R1630 | 2923800 | 0.4 | 1 |
| 3 | 100 | DDA803A-100/0.3 | A | 0.3 | 2CSB803101R3000 | 2544135 | 0.64 | 1 |
| 3 | 100 | DDA803A-100/0.5 | A | 0.5 | 2CSB803101R4000 | 2541738 | 0.64 | 1 |
| 3 | 100 | DDA803AS-100/0.3 | AS | 0.3 | 2CSB803201R3000 | 2544838 | 0.64 | 1 |
| 3 | 100 | DDA803AS-100/0.5 | AS | 0.5 | 2CSB803201R4000 | 2542438 | 0.64 | 1 |
| 3 | 100 | DDA803AS-100/1 | AS | 1 | 2CSB803201R5000 | 2547334 | 0.64 | 1 |
| 3 | 100 | DDA803A-100/0.03AP-R | A-AP-R | 0.03 | 2CSB803401R1000 | 2542230 | 0.64 | 1 |



2CC04193053F0001

| | | | | | | | | |
|---|-----|----------------------|--------|------|-----------------|---------|------|---|
| 4 | 63 | DDA804AC-63/0.03 | AC | 0.03 | 2CSB804001R1630 | 2924401 | 0.46 | 1 |
| 4 | 63 | DDA804AC-63/0.3 | AC | 0.3 | 2CSB804001R3630 | 2924609 | 0.46 | 1 |
| 4 | 63 | DDA804A-63/0.03 | A | 0.03 | 2CSB804101R1630 | 2924807 | 0.46 | 1 |
| 4 | 63 | DDA804A-63/0.3 | A | 0.3 | 2CSB804101R3630 | 2925002 | 0.46 | 1 |
| 4 | 63 | DDA804A-63/0.5 | A | 0.5 | 2CSB804101R4630 | 2925200 | 0.46 | 1 |
| 4 | 63 | DDA804AS-63/0.3 | AS | 0.3 | 2CSB804201R3630 | 2926207 | 0.46 | 1 |
| 4 | 63 | DDA804AS-63/1 | AS | 1 | 2CSB804201R5630 | 2926504 | 0.46 | 1 |
| 4 | 63 | DDA804A-63/0.03AP-R | A-AP-R | 0.03 | 2CSB804401R1630 | 2927709 | 0.46 | 1 |
| 4 | 100 | DDA804A-100/0.3 | A | 0.3 | 2CSB802101R3000 | 2545033 | 0.77 | 1 |
| 4 | 100 | DDA804A-100/0.5 | A | 0.5 | 2CSB802101R4000 | 2542636 | 0.77 | 1 |
| 4 | 100 | DDA804AS-100/0.3 | AS | 0.3 | 2CSB804201R3000 | 2544739 | 0.77 | 1 |
| 4 | 100 | DDA804AS-100/0.5 | AS | 0.5 | 2CSB804201R4000 | 2542339 | 0.77 | 1 |
| 4 | 100 | DDA804AS-100/1 | AS | 1 | 2CSB804201R5000 | 2547235 | 0.77 | 1 |
| 4 | 100 | DDA804A-100/0.03AP-R | A-AP-R | 0.03 | 2CSB804401R1000 | 2547136 | 0.77 | 1 |

S800 Accessories

1



20CC0413257F0001

| Quantity | Rated current | Order details | Type | $I_{\Delta n}$ | Product number | GTIN | Weight | Pack. |
|----------|---------------|----------------------|--------|----------------|----------------|-----------------|--------|-------|
| Pole | [A] | Type Code | | | 2CC | EAN 76122712 | [kg] | unit |
| 2 | 125 | DS802S-B125/0.03AP-R | A-AP-R | 0.03 | B862004R0845 | 11301 | 0.79 | 1 |
| 2 | 125 | DS802S-C125/0.03AP-R | A-AP-R | 0.03 | B862004R0844 | 11318 | 0.79 | 1 |
| 2 | 125 | DS802S-D125/0.03AP-R | A-AP-R | 0.03 | B862004R0841 | 11325 | 0.79 | 1 |
| 2 | 125 | DS802S-K125/0.03AP-R | A-AP-R | 0.03 | B862004R0647 | 11332 | 0.79 | 1 |
| 2 | 125 | DS802N-B125/0.03AP-R | A-AP-R | 0.03 | B892004R0845 | 11424 | 0.79 | 1 |
| 2 | 125 | DS802N-C125/0.03AP-R | A-AP-R | 0.03 | B892004R0844 | 11431 | 0.79 | 1 |
| 2 | 125 | DS802N-D125/0.03AP-R | A-AP-R | 0.03 | B892004R0841 | 11448 | 0.79 | 1 |
| 2 | 125 | DS802S-B125/1AS | AS | 1 | C862006R0845 | 11516 | 0.79 | 1 |
| 2 | 125 | DS802S-C125/1AS | AS | 1 | C862006R0844 | 11523 | 0.79 | 1 |
| 2 | 125 | DS802S-D125/1AS | AS | 1 | C862006R0841 | 11530 | 0.79 | 1 |
| 2 | 125 | DS802S-K125/1AS | AS | 1 | C862006R0647 | 11547 | 0.79 | 1 |
| 2 | 125 | DS802N-B125/1AS | AS | 1 | C892006R0845 | 11639 | 0.79 | 1 |
| 2 | 125 | DS802N-C125/1AS | AS | 1 | C892006R0844 | 11646 | 0.79 | 1 |
| 2 | 125 | DS802N-D125/1AS | AS | 1 | C892006R0841 | 11653 | 0.79 | 1 |
| 2 | 125 | DS802S-B125/0.3A | A | 0.3 | A862005R0845 | 11721 | 0.79 | 1 |
| 2 | 125 | DS802S-C125/0.3A | A | 0.3 | A862005R0844 | 11738 | 0.79 | 1 |
| 2 | 125 | DS802S-D125/0.3A | A | 0.3 | A862005R0841 | 11745 | 0.79 | 1 |
| 2 | 125 | DS802S-K125/0.3A | A | 0.3 | A862005R0647 | 11752 | 0.79 | 1 |
| 2 | 125 | DS802N-B125/0.3A | A | 0.3 | A892005R0845 | 11844 | 0.79 | 1 |
| 2 | 125 | DS802N-C125/0.3A | A | 0.3 | A892005R0844 | 11851 | 0.79 | 1 |
| 2 | 125 | DS802N-D125/0.3A | A | 0.3 | A892005R0841 | 11868 | 0.79 | 1 |



20CC0413258F0001

| | | | | | | | | |
|---|-----|----------------------|--------|------|--------------|-------|------|---|
| 3 | 125 | DS803S-B125/0.03AP-R | A-AP-R | 0.03 | B863004R0845 | 11349 | 1.14 | 1 |
| 3 | 125 | DS803S-C125/0.03AP-R | A-AP-R | 0.03 | B863004R0844 | 11356 | 1.14 | 1 |
| 3 | 125 | DS803S-D125/0.03AP-R | A-AP-R | 0.03 | B863004R0841 | 11363 | 1.14 | 1 |
| 3 | 125 | DS803S-K125/0.03AP-R | A-AP-R | 0.03 | B863004R0647 | 11370 | 1.14 | 1 |
| 3 | 125 | DS803N-B125/0.03AP-R | A-AP-R | 0.03 | B893004R0845 | 11455 | 1.14 | 1 |
| 3 | 125 | DS803N-C125/0.03AP-R | A-AP-R | 0.03 | B893004R0844 | 11462 | 1.14 | 1 |
| 3 | 125 | DS803N-D125/0.03AP-R | A-AP-R | 0.03 | B893004R0841 | 11479 | 1.14 | 1 |
| 3 | 125 | DS803S-B125/0.3A | A | 0.3 | A863005R0845 | 11769 | 1.14 | 1 |
| 3 | 125 | DS803S-C125/0.3A | A | 0.3 | A863005R0844 | 11776 | 1.14 | 1 |
| 3 | 125 | DS803S-D125/0.3A | A | 0.3 | A863005R0841 | 11783 | 1.14 | 1 |
| 3 | 125 | DS803S-K125/0.3A | A | 0.3 | A863005R0647 | 11790 | 1.14 | 1 |
| 3 | 125 | DS803N-B125/0.3A | A | 0.3 | A893005R0845 | 11875 | 1.14 | 1 |
| 3 | 125 | DS803N-C125/0.3A | A | 0.3 | A893005R0844 | 11882 | 1.14 | 1 |
| 3 | 125 | DS803N-D125/0.3A | A | 0.3 | A893005R0841 | 11899 | 1.14 | 1 |

S800 Accessories



20CC4132159R0001

| Quantity | Rated current | Order details | Type | $I_{\Delta n}$ | Product number | GTIN EAN | Weight | Pack. |
|----------|---------------|----------------------|--------|----------------|----------------|----------|--------|-------|
| Pole | [A] | Type Code | | | 2CC | 76122712 | [kg] | unit |
| 4 | 125 | DS804S-B125/0.03AP-R | A-AP-R | 0.03 | B864004R0845 | 11387 | 1.44 | 1 |
| 4 | 125 | DS804S-C125/0.03AP-R | A-AP-R | 0.03 | B864004R0844 | 11394 | 1.44 | 1 |
| 4 | 125 | DS804S-D125/0.03AP-R | A-AP-R | 0.03 | B864004R0841 | 11400 | 1.44 | 1 |
| 4 | 125 | DS804S-K125/0.03AP-R | A-AP-R | 0.03 | B864004R0647 | 11417 | 1.44 | 1 |
| 4 | 125 | DS804N-B125/0.03AP-R | A-AP-R | 0.03 | B894004R0845 | 11486 | 1.44 | 1 |
| 4 | 125 | DS804N-C125/0.03AP-R | A-AP-R | 0.03 | B894004R0844 | 11493 | 1.44 | 1 |
| 4 | 125 | DS804N-D125/0.03AP-R | A-AP-R | 0.03 | B894004R0841 | 11509 | 1.44 | 1 |
| 4 | 125 | DS804S-B125/0.3AS | AS | 0.3 | C864005R0845 | 11554 | 1.44 | 1 |
| 4 | 125 | DS804S-C125/0.3AS | AS | 0.3 | C864005R0844 | 11561 | 1.44 | 1 |
| 4 | 125 | DS804S-D125/0.3AS | AS | 0.3 | C864005R0841 | 11578 | 1.44 | 1 |
| 4 | 125 | DS804S-K125/0.3AS | AS | 0.3 | C864005R0647 | 11585 | 1.44 | 1 |
| 4 | 125 | DS804S-B125/1AS | AS | 1 | C864006R0845 | 11592 | 1.44 | 1 |
| 4 | 125 | DS804S-C125/1AS | AS | 1 | C864006R0844 | 11608 | 1.44 | 1 |
| 4 | 125 | DS804S-D125/1AS | AS | 1 | C864006R0841 | 11615 | 1.44 | 1 |
| 4 | 125 | DS804S-K125/1AS | AS | 1 | C864006R0647 | 11622 | 1.44 | 1 |
| 4 | 125 | DS804N-B125/0.3AS | AS | 0.3 | C894005R0845 | 11660 | 1.44 | 1 |
| 4 | 125 | DS804N-C125/0.3AS | AS | 0.3 | C894005R0844 | 11677 | 1.44 | 1 |
| 4 | 125 | DS804N-D125/0.3AS | AS | 0.3 | C894005R0841 | 11684 | 1.44 | 1 |
| 4 | 125 | DS804N-B125/1AS | AS | 1 | C894006R0845 | 11691 | 1.44 | 1 |
| 4 | 125 | DS804N-C125/1AS | AS | 1 | C894006R0844 | 11707 | 1.44 | 1 |
| 4 | 125 | DS804N-D125/1AS | AS | 1 | C894006R0841 | 11714 | 1.44 | 1 |
| 4 | 125 | DS804S-B125/0.3A | A | 0.3 | A864005R0845 | 11806 | 1.44 | 1 |
| 4 | 125 | DS804S-C125/0.3A | A | 0.3 | A864005R0844 | 11813 | 1.44 | 1 |
| 4 | 125 | DS804S-D125/0.3A | A | 0.3 | A864005R0841 | 11820 | 1.44 | 1 |
| 4 | 125 | DS804S-K125/0.3A | A | 0.3 | A864005R0647 | 11837 | 1.44 | 1 |
| 4 | 125 | DS804N-B125/0.3A | A | 0.3 | A894005R0845 | 11905 | 1.44 | 1 |
| 4 | 125 | DS804N-C125/0.3A | A | 0.3 | A894005R0844 | 11912 | 1.44 | 1 |
| 4 | 125 | DS804N-D125/0.3A | A | 0.3 | A894005R0841 | 11929 | 1.44 | 1 |



Table of content S800

Properties of main devices S800

| | |
|--------------------------|-----|
| Characteristics | 2/2 |
| Special features of S800 | 2/8 |

Properties of S800 accessories



| | |
|----------------------|------|
| S800-AUX | 2/20 |
| S800-AUX/ALT | 2/20 |
| S800-NT | 2/21 |
| S800-RSU | 2/21 |
| S800-RSU-CP | 2/22 |
| S800-RSU-P | 2/22 |
| S800-SOR | 2/22 |
| S800-UVR | 2/22 |
| S803S-SCL | 2/22 |
| S800-SCL-SR | 2/23 |
| S800-RD | 2/24 |
| S800-IP9 | 2/24 |
| S800-PLL | 2/24 |
| S800U-PLL | 2/25 |
| S800-CT, -RT | 2/25 |
| S800-ILS | 2/25 |
| S802-LINK50/-LINK125 | 2/25 |
| DDA800 | 2/26 |
| S800 Busbar system | 2/26 |
| Unifix H | 2/26 |

High Performance MCB S800

Characteristics of the S and N series

Characteristics

2

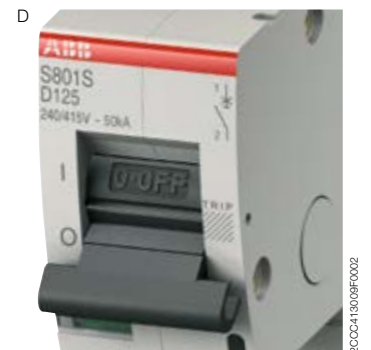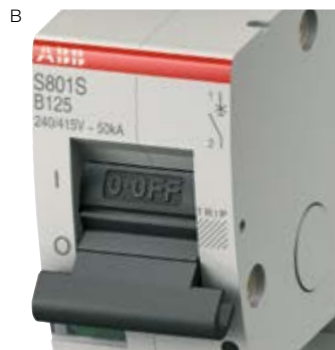

Tripping characteristic B

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping
 3 ... 5 x I_n AC
 Reference temperature 30 °C

As circuit breaker for electric circuits feeding consumers that do not generate any current peaks, or only mild ones (boilers, electric heaters, cooking stoves).

Tripping characteristic C

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping
 5 ... 10 x I_n AC
 Reference temperature 30 °C




As “standard” MCB for electric circuits feeding consumers that generate current peaks normal within inductive devices (fluorescent tubes, electric discharge lamps) as well as for circuits within sockets in commercially used systems/plants.

Tripping characteristic D

Thermal tripping 1.13 ... 1.3 · I_n
 Electromagnetic tripping
 10 ... 20 x I_n AC
 Reference temperature 30 °C

As main circuit breaker for electric circuits feeding consumers that generate extremely high current peaks (transformers, capacitor banks).
 As main circuit breaker connected upstream of other circuit breakers (reference over-current circuit breaker).

Tripping characteristics

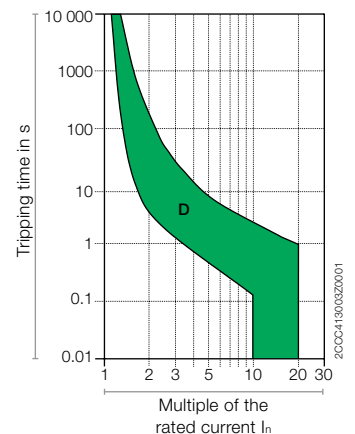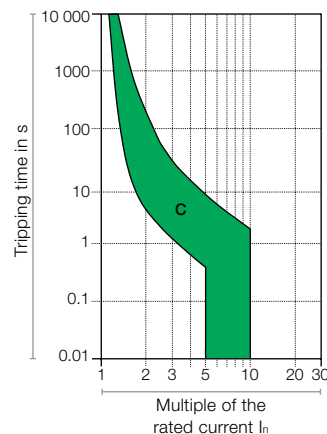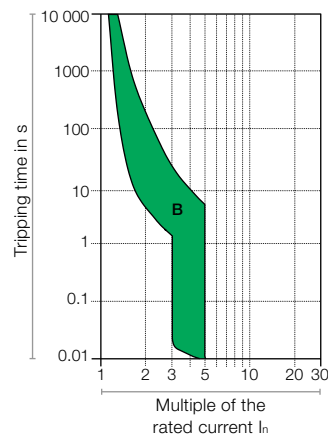

Tripping behaviour compliant to EN 60898-1

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping | |
|-----------------|-------------|-----------------------|-----------------------|--------------------------|---------------------|
| | | Small test current | Large test current | Small test current | Large test current |
| B | 10 ... 80 A | 1.13 x I _n | 1.45 x I _n | 3 x I _n | 5 x I _n |
| C | 10 ... 80 A | 1.13 x I _n | 1.45 x I _n | 5 x I _n | 10 x I _n |
| D | 10 ... 80 A | 1.13 x I _n | 1.45 x I _n | 10 x I _n | 20 x I _n |

* applies exclusively to the S series.



Tripping characteristic K

Thermal tripping 1.05 ... 1.2 x I_n
 Electromagnetic tripping 13 x I_n AC
 Reference temperature 40°C

Tripping characteristic UCB




Thermal tripping 1.05 ... 1.3 x I_n
 Electromagnetic tripping 6 x I_n DC
 Reference temperature 30°C

Tripping characteristic UCK

Thermal tripping 1.05 ... 1.2 x I_n
 Electromagnetic tripping 11 x I_n DC
 Reference temperature 40°C

Serves as High Performance MCB in case of high magnetic inrush currents that occur, e.g. in engines or transformers. This characteristic provides the best protection for a wide range of electrical systems by allowing high inrush currents when starting up the system.

Device protection independent of polarity within DC plants up to 750 V = at a time constant of ≤15 ms.

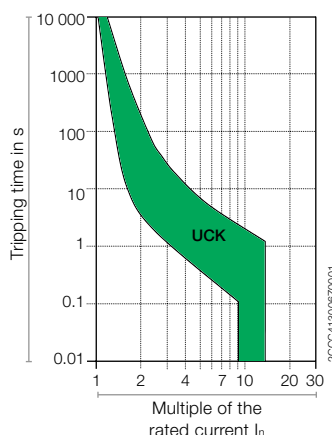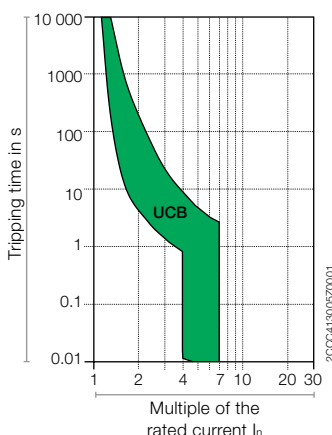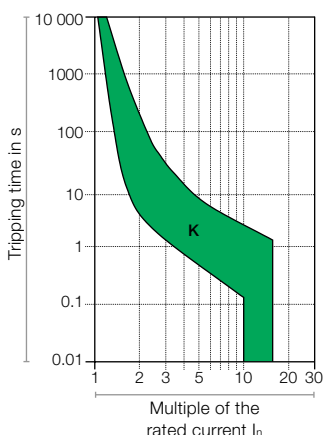

Tripping behaviour compliant to IEC 60947-2



| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|--------------|-----------------------|-----------------------|--------------------------------|
| | | Small test current | Large test current | |
| B | 6 ... 125 A | 1.05 x I _n | 1.30 x I _n | 4 x I _n ± 20% |
| C | 6 ... 125 A | 1.05 x I _n | 1.30 x I _n | 8 x I _n ± 20% |
| D | 6 ... 125 A | 1.05 x I _n | 1.30 x I _n | 13 x I _n ± 20% |
| * K | 6 ... 125 A | 1.05 x I _n | 1.20 x I _n | 13 x I _n ± 20% |
| * KM | 10 ... 80 A | | | 13 x I _n ± 20% |
| * UCB | 10 ... 125 A | 1.05 x I _n | 1.30 x I _n | 6 x I _n ± 20% (DC) |
| * UCK | 10 ... 125 A | 1.05 x I _n | 1.20 x I _n | 11 x I _n ± 20% (DC) |

High Performance MCB S800

Characteristics of the B and C series

Characteristics

2



Tripping characteristic B

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping
 3 ... 5 x I_n AC
 Reference temperature 30 °C

As circuit breaker for electric circuits feeding consumers that do not generate any current peaks, or only mild ones (boilers, electric heaters, cooking stoves).

Tripping characteristic C

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping
 5 ... 10 x I_n AC
 Reference temperature 30 °C




As "standard" MCB for electric circuits feeding consumers that generate current peaks normal within inductive devices (fluorescent tubes, electric discharge lamps) as well as for circuits within sockets in commercially used systems/plants.

Tripping characteristic D

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping
 10 ... 20 x I_n AC
 Reference temperature 30 °C

As main circuit breaker for electric circuits feeding consumers that generate extremely high current peaks (transformers, capacitor banks).
 As main circuit breaker connected upstream of other circuit breakers (reference over-current circuit breaker).

Tripping characteristics

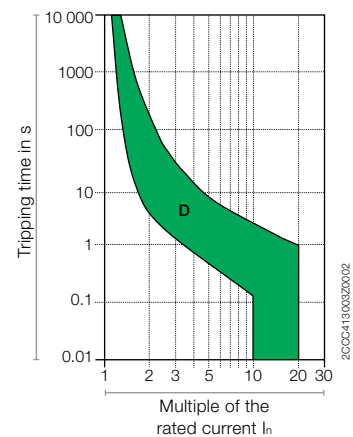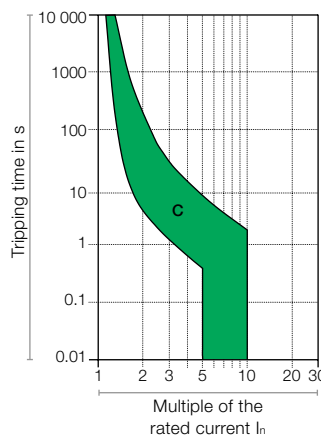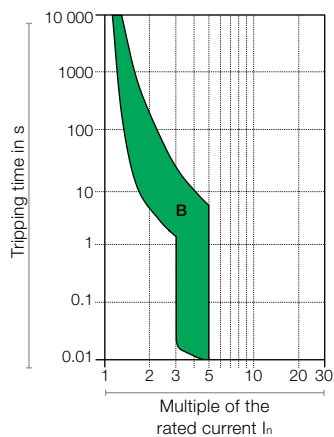

Tripping behaviour compliant to 60898-1 (apply for S800C only)


| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping | |
|-----------------|-------------|-----------------------|-----------------------|--------------------------|---------------------|
| | | Small test current | Large test current | Small test current | Large test current |
| B | 10 ... 125A | 1.13 x I _n | 1.45 x I _n | 3 x I _n | 5 x I _n |
| C | 10 ... 125A | 1.13 x I _n | 1.45 x I _n | 5 x I _n | 10 x I _n |
| D | 10 ... 100A | 1.13 x I _n | 1.45 x I _n | 10 x I _n | 20 x I _n |



Tripping characteristic K

Thermal tripping 1.05 ... 1.2 x I_n
 Electromagnetic tripping 13 x I_n AC
 Reference temperature 40°C

Serves as High Performance MCB in case of high magnetic inrush currents that occur, e.g. in engines or transformers. This characteristic provides the best protection for a wide range of electrical systems by allowing high inrush currents when starting up the system.

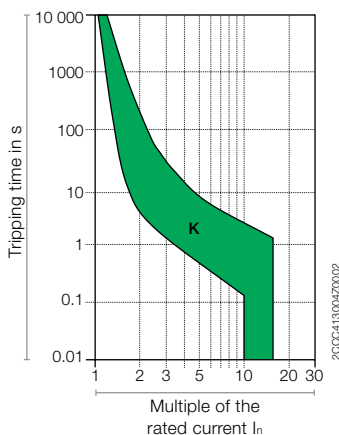

Tripping behaviour compliant to IEC 60947-2

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|-----------------|-----------------------|-----------------------|---------------------------|
| | | Small test current | Large test current | |
| B | 10/32* ... 125A | 1.05 x I _n | 1.30 x I _n | 4 x I _n ± 20% |
| C | 10/32* ... 125A | 1.05 x I _n | 1.30 x I _n | 8 x I _n ± 20% |
| D | 10/32* ... 125A | 1.05 x I _n | 1.30 x I _n | 13 x I _n ± 20% |
| K | 10/32* ... 125A | 1.05 x I _n | 1.20 x I _n | 13 x I _n ± 20% |

* applies for S800B

High Performance MCB S800

Characteristics of the U series

Characteristics

2



ZCCC413315F0001

Tripping characteristic Z

Thermal tripping 1.00 ... 1.35 x I_n
 Electromagnetic tripping 4 x I_n AC
 Reference temperature 25 °C

As miniature circuit breaker for electric circuits feeding consumers that do not generate any current peaks, or only mild ones.




ZCCC413304F0002

Tripping characteristic K


Thermal tripping 1.00 ... 1.35 x I_n
 Electromagnetic tripping 8 x I_n AC
 Reference temperature 25 °C

Serves as High Performance MCB in case of high magnetic inrush currents that occur, e.g. in engines or transformers. This characteristic provides the best protection for a wide range of electrical systems by allowing high inrush currents when starting up the system.

Tripping characteristics

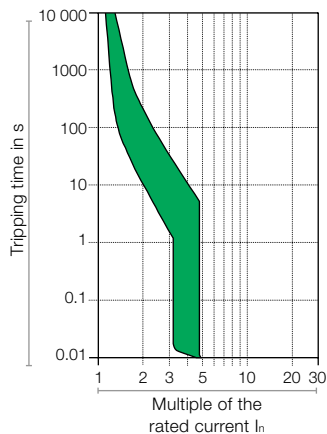

ZCCC413258Z0001

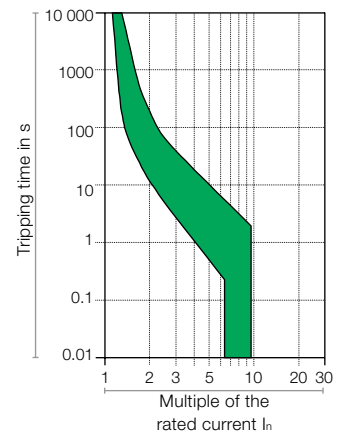

ZCCC413258Z0001

Tripping behaviour compliant to UL 489

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|-------------|-----------------------|-----------------------|--------------------------|
| | | Small test current | Large test current | |
| Z | 10 ... 100A | 1.00 x I _n | 1.35 x I _n | 4 x I _n ± 20% |
| K | 10 ... 100A | 1.00 x I _n | 1.35 x I _n | 8 x I _n ± 20% |

High Performance MCB S800

Characteristics of the S804U-UCZ, S804U-PVS5

Characteristics



Tripping characteristic

Thermal tripping 1.00 ... 1.35 x I_n
 Electromagnetic tripping 11 x I_n
 Reference temperature 25 °C



As circuit breaker for voltages up to 600 VDC. especially in datacenters.

Tripping characteristic

Thermal tripping 1.13 ... 1.3 x I_n
 Electromagnetic tripping 6 x I_n
 Reference temperature 50 °C

As Ground-Fault Detector Interrupter (GFDI) in photovoltaic systems.

Tripping characteristics

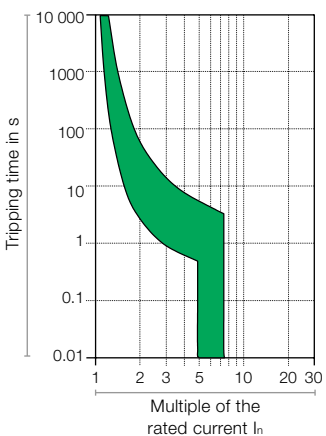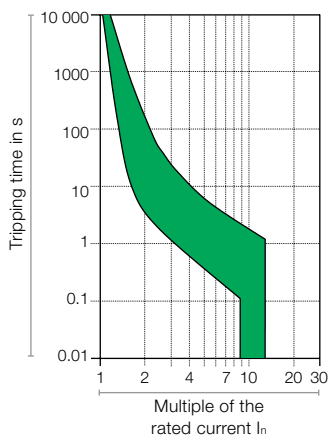

Tripping behaviour compliant to UL 489B

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|----------|-----------------------|-----------------------|--------------------------|
| | | Small test current | Large test current | |
| PVS | 5A | 1.13 x I _n | 1.30 x I _n | 6 x I _n (DC) |

Tripping behaviour compliant to UL 489

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|------------|-----------------------|-----------------------|--------------------------------|
| | | Small test current | Large test current | |
| Z | 10 ... 80A | 1.00 x I _n | 1.35 x I _n | 11 x I _n (DC) ± 20% |

Photovoltaic High Performance MCB Characteristic of the S800PV-S

Characteristics

2




2000413246R001

Tripping characteristic

Thermal tripping $1.05 \dots 1.3 \times I_n$
 Electromagnetic tripping $6 \times I_n$
 Reference temperature 30°C

DC protection independent of polarity in photovoltaic plants up to 1200VDC at a time constant $\leq 5 \text{ ms}$.

Tripping characteristics

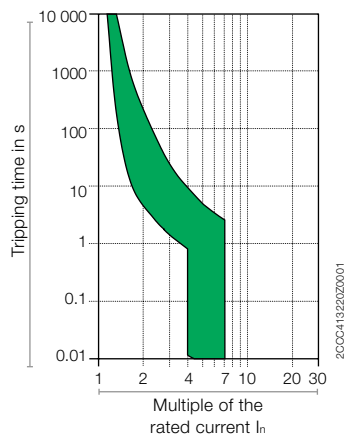

20004132203001

Tripping behaviour compliant to IEC 60947-2

| Characteristics | Currents | Thermal tripping | | Electromagnetic tripping |
|-----------------|-------------|--------------------|--------------------|--------------------------|
| | | Small test current | Large test current | |
| PV-S | 10 ... 125A | $1.05 \times I_n$ | $1.30 \times I_n$ | $6 \times I_n$ (DC) |

Properties

Special features of S800



20CC04130001F0002

The S800S, -N, -C, -B and -HV high performance MCBs: safe innovation

The S800 high performance MCB limits energy and current in case of a short-circuit power cut off.


The specially designed double arcing chamber system, i. e. per pole are two arcing chambers, ensures excellent operating characteristics. The new S800B has only one arcing chamber. Additional exceptional features of the S800 series are:

- Convincing:** Selectivity to upstream overcurrent protection devices due to a total switch-off time of only ≤ 2.5 ms.
- Safe:** Excellent backup protection by limiting the energy to a value $\leq 100\,000\text{ A}^2\text{s}$ (125A/50kA). In case of short-circuit, there is a low load to the circuit and the location of the damage due to the high limitation of the let-through energy.
- Loads:** Up to 125 A rated current
- Checked:**
 - S series** up to 50 kA rated ultimate short-circuit breaking capacity I_{cu}
 - N series** up to 36 kA rated ultimate short-circuit breaking capacity I_{cu}
 - C series** up to 25 kA rated ultimate short-circuit breaking capacity I_{cu}
 - B series** up to 16 kA rated ultimate short-circuit breaking capacity I_{cu}
 - HV series** up to 4 kA rated ultimate short-circuit breaking capacity I_{cu}
- Selectable:** Characteristics:
 - S series: B, C, D, K, KM, UCB, UCK
 - N series: B, C, D
 - C series: B, C, D, K
 - B series: B, C, D, K
 - HV series: K
- Compact:** Slight 27 mm width per pole
- Flexible:** Accessories installed by the customer.



S800U: Highest safety now also ensured for UL applications

- Convincing:** Covering of different voltage ranges (240 VAC, 600 VDC, 1000 VDC)
- Safe:** Excellent backup protection due to limitation of energy.
- Loads:** Up to 100 A rated current
- Checked:**
 - K-, Z series** up to 50kA breaking capacity
 - UCZ series** up to 10kA breaking capacity
 - PVS series** up to 3kA breaking capacity
- Selectable:** Characteristics:
 - K, Z, UCZ, PVS
- Compact:** Smallest sizes.
- Flexible:** Accessories installed by the customer.
- Standards:** UL489, UL489B, IEC 60947-2



20CC0413194Z0002

Short description

Two triggers detect overcurrents, effect the switching station and provide short-circuit protection.

1. The thermal trip for overload protection with time delay.
2. The electromagnetic fast-acting trip with concrete anchor for short-circuit protection.

- $I_k \times \sqrt{2}$ peak value of the prospective short-circuit current
- I_d max. let-through current of the S800 high performance MCB
- U_n supply voltage
- U_B build up and collapse of the arc voltage
- t_k Turn-off time of S800 high performance MCB

① 1 sinus half-wave
50 Hz Δ T/2 = 10ms

Properties

Special features of S800

2



2CCC413041F0002

Play it safe: display the operational state

The mechanical drive of the S800 high performance MCB is equipped with a trip-free release. It therefore switches independent of the actuating force or speed on the actuating lever. The trip position display thereby always reliably displays the exact position of the moving contact. The trip position provides additional trip detection allowing you to easily find the reason for the cut-off. Because the switch lever moves to the middle position in case of thermal or magnetic tripping, the user sees at a glance that this is an error state and can then initiate suitable measures.

*Middle position of switch lever, see picture

Reliable: the disconnecter properties

In OFF position (0 position), the S800 high performance MCB guarantees safe electrical isolation of the circuit compliant to IEC 60947-2.

Flexible: the installation

The S800 high performance MCB can be directly mounted onto any position on the DIN mounting rail without any impairment to its characteristics. Because the pole dimensions are identical for all rated currents, installation in switching systems is simplified.

The S800 can be installed in different ways:


- together with other breakers in the same DIN rail horizontally or vertically
- as an individual breaker in a single fixed compartment where the breaker is switched on/off with a rotary handle from the door, and the breaker is mounted on the wall of the panel
- as an individual breaker in a single withdrawable module, when requirements for high availability in the installation are a must

Cage and ring terminals

When ordering you can choose between cage terminals or ring terminal connectors. No matter which type you select, both connection options guarantee a high degree of reliability.



2CCC413038F0002



2CCC413046F0004



2CCC413038F0004

Doesn't let go: the replaceable terminal adapter*

The S800 standard equipment with interchangeable terminal adapter for wires, cables and rigid conductors guarantees a high level of flexibility and comfort. Fast and safe connection of the conductors is ensured by the "onboard terminal shutter" integrated into the body of the terminal, thereby preventing incorrect underclamping of the connections.

* Available for the S, N, C, U and PV series.



Extra safe: Fire protection acc. to NF F 16-101 and NF F 16-102 (prEN45545-2)

The S800 high performance MCB provides standard compliance to the requirements of Standard prEN45545-2 (Railway applications – Fire Protection on railway vehicles – Part 2: Requirements for fire behaviour of materials and components). This standard is based on the French standard NF F 16-101/ NF F 16-102 and makes new requirements of the fire behaviour of the materials used. The main focus of attention with relation to fire protection is on the following:

- Flame spread
- Rate of heat release
- Smoke development
- Toxicity

The S800 high performance automatic meets the following classification compliant to NF F 16-101 and NF F 16-102:

- I3F2
 - I3 no permanent flame at 850 °C
 - F2 index of fume density and toxicity ≤ 40

More information regarding the use of S800 breakers in rolling stock applications is available in the Technical catalogue ‘DIN-Rail components for rolling stock applications 2CDC002053D0204’



Elevation

Up to 2000 meters above sea level, the rated characteristics of the S800 high performance MCB remain unchanged. With increasing height, the properties of the atmosphere change regarding composition, dielectricity, the cooling capacity and the pressure. Thus for altitudes over 2000m below values are valid.

| Elevation | [m] | 2000 | 3000 | 4000 | 5000 |
|---|------|----------------|-------------------|-------------------|------------------|
| Rated impulse withstand voltage U_{imp} | [kV] | 8 | 6 | 6 | 6 |
| Rated operational voltage U_e | [V] | 690 | 600 | 540 | 470 |
| Max. rated current I_n | [A] | $1 \times I_n$ | $0.96 \times I_n$ | $0.93 \times I_n$ | $0.9 \times I_n$ |



CMS – Current Measurement System

The CMS is a multichannel current measurement system for branch monitoring of alternating (AC) and direct (DC) currents up to 160A. Various sensor types allow the mounting in every installation environment.

Companies are dependent on the trouble-free operation of their electrical systems. Monitoring every branch circuit of an installation with the CMS enables to detect deviations quickly before serious damage is caused. Furthermore branch monitoring gives the maximum transparency on where and how the electricity is used. It allows an effective energy management in order to save costs and to assign them fairly.

Up to 64 sensors can be connected to each Control Unit. The sensors measure root mean square values (AC/DC currents) (actual, min/max, hold values) and transmit their measurement data via the flat cable to the Control Unit. The measured values are displayed locally on the Control Unit’s touch display and can be queried remotely by an RS485 Modbus connection.

Properties

DC Performance



20CC413223F0001


S800S-UC: The first choice as DC high performance MCB

The S800S-UC DC high performance MCB is in a wide range of DC applications at home. Due to their high rated operational voltage of up to 750VDC the max. rated current of 125 A and the high breaking capacity of up to 50kA, make these devices suitable for applications, e.g.:


- DC track
- Galavanic applications
- Photovoltaics

S800S, N, and C: Up to 125VDC on each pole


The AC range is also an interesting choice for DC applications up to 125VDC per pole.




20CC413196Z0002




20CC413201Z0002




20CC413196Z0002




20CC41322Z0001



20CC413197Z0002



20CC413199Z0002



20CC413200Z0002

S800S-UC

| Graphic | Short-circuit between output terminals | Contact to ground between output terminals and - earth |
|---------|--|--|
| A | 250 VDC | 250 VDC |
| B | 500 VDC | 250 VDC |
| C | 500 VDC | 500 VDC |
| D | 250 VDC | 250 VDC |
| E | 750 VDC | 750 VDC |
| F | 500 VDC | 250 VDC (double failure) |
| G | 750 VDC | 500 VDC (double failure) |

S800S, S800N, S800C

| Graphic | Short-circuit between output terminals | Contact to ground between output terminals and - |
|---------|--|--|
| A | 125 VDC | 125 VDC |
| B | 250 VDC | 125 VDC |
| C | 250 VDC | 250 VDC |
| D | 125 VDC | 125 VDC |
| E | 375 VDC | 375 VDC |
| F | 250 VDC | 125 VDC (double failure) |
| G | 500 VDC | 125 VDC (double failure) |

Properties

Special features of S800PV-S, S800PV-M



2C000413246R0001

String protection with S800PV-S

A large proportion of the costs for photovoltaic systems is tied up in the equipment for the DC generation. The S800PV-S protects these investments in the event of a fault.

- Convincing:** Suitable for up to 1200 VDC
- Loadable:** String protection up to 125 A
Reliable protection at high ambient temperatures
- Tested:** Rated ultimate short-circuit breaking capacity I_{cu} of 5 kA in accordance with IEC 60947-2
- Fast:** Reclosable for minimum standstill times
- Safe:** Disconnecter properties, switching under load
- Flexible:** Extensive range of accessories for remote shutdown and fault signalling



2C000413379R0001

System isolation with S800PV-M/S802PV-M-H

The use of a DC isolator can be implemented reliably and in the minimum of space. Either you can choose the pole-independent S800PV-M or the non pole-independent 2-pole S800PV-M-H. The S800PV-M is available as 2-,3- and 4-pole version up to 1200 VDC. The S802PV-M-H is available as 2-pole version up to 1000 VDC.

- Convincing:** Suitable for up to 1200 VDC
- Loadable:** System isolation up to 125 A
No change in operating behaviour up to 60°C ambient temperature
Reliable switching of ohmic loads including moderate overloads
- Compact:** Minimum dimensions with maximum efficiency
- Tested:** Short-time withstand current I_{cw} of 1.5 kA in accordance with IEC 60947-3
- Safe:** Disconnecter properties, switching under load



2C000413261R0001


Maximum device voltages

| S800PV-S | 2-pole | 3-pole | 4-pole |
|---------------------|----------|----------|----------|
| I_n 10...80 A | 800 VDC | 1200 VDC | 1200 VDC |
| I_n 100, 125 A | 600 VDC | 1000 VDC | 1200 VDC |
| S800PV-M | | | |
| I_n 32, 63, 125 A | 800 VDC | 1200 VDC | 1200 VDC |
| S802PV-M-H | | | |
| I_n 32, 63, 100 A | 1000 VDC | | |


ABB recommends to fulfill national and/or international standards as e. g. IEC 61439-1 Low-voltage switchgear and controlgear assemblies

Exemplary circuit diagrams


Earthed network ≤ 80 A

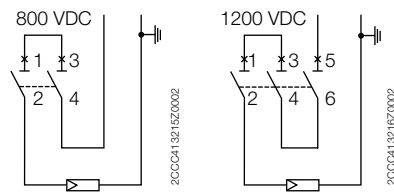

100, 125 A

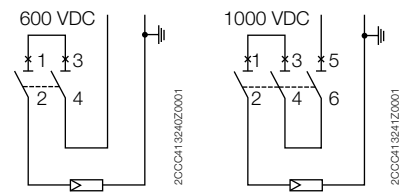

Non-earthed network

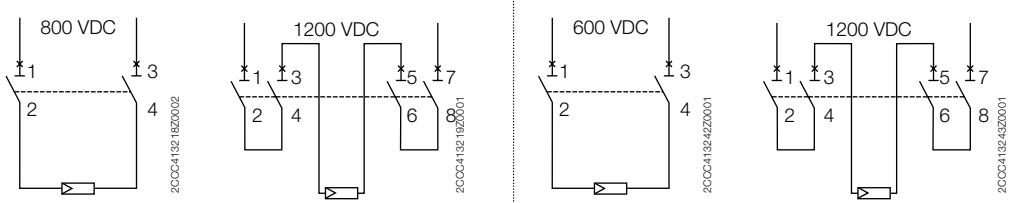

S804U-PVS5 High performance MCB for GFDI


2



2000413374F0001

GFDI = Ground Fault Detector Interrupter

The S804U-PVS5 is for GFDI application (Ground-Fault Detector Interrupter) in photovoltaic systems, with rated current 5 A and short-circuit current rating of 3 kA. The breaker is tested acc. to UL489B for 1000VDC.

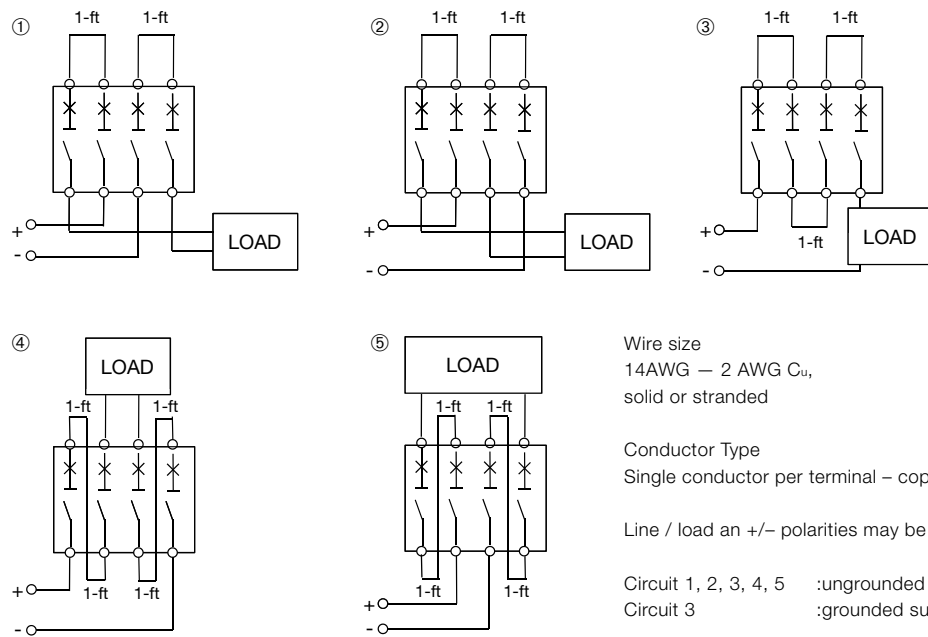

Wire size
14AWG – 2 AWG Cu,
solid or stranded

Conductor Type
Single conductor per terminal – copper only, 75C wire

Line / load an +/- polarities may be reversed

Circuit 1, 2, 3, 4, 5 : ungrounded supplies
Circuit 3 : grounded supplies

Properties

Special features of S800-RSU



2ACC0413383F0001

S800 with S800-RSU

Known for its outstanding short circuit capacities of up to 50 kA and voltages of up to 690 VAC and 1200 VDC, S800 has become a convenient solution for the DIN Rail.

S800-RSU makes the use of S800 even more convenient: driven by a brushless high precision DC motor, S800-RSU ensures fast remote-controlled operation. Wiring and operation is easy: S800-RSU can be operated with standard MDRC pushbuttons and indicator lights or via programmable logic controllers (PLCs). Due to its low power consumption, compact power supply units can be chosen.

Applications and Benefits:

Photovoltaics: Remote-controlled string management and convenient GFDI solutions

For a new generation of combiner boxes: used as a substitute for string or array fuses, S800PV or S804U-PVS5 in combination with S800-RSU ensures maximum PV yield due to minimum downtimes in case of failure or maintenance. For selective string management, additional switch disconnectors are no longer needed. S800-RSU adds to S800PV or S804U-PVS5 outstanding benefits for the PV-industry, allowing automated ground fault detection and interruption applications following UL1741.

Critical Power: Uninterrupted Power Supply Units

Fast, reliable backup protection for UPS systems: S800-RSU and S500-RSU provide outstanding quality and performance by switching a backup system quickly and reliably at extremely low stand-by current.

Telecommunications: Remote transmitter substations

The Remote Switching Units RSU minimize time-consuming visits to remote substations. Downtimes can be kept low due to convenient remote resetting of a tripped High Performance MCB.

Wind Power: Turbine towers

Inaccessible areas like wind turbine towers require immediate action in the case of overload or short circuits. The automatic switching capability of the High Performance MCB leads to reduction of cost-intensive fuse replacement or manual resetting of circuit breakers.

Product Facts:

- Driven by Swiss-made brushless high precision DC motors
- Field mountable on any multi-pole S800 High Performance MCB
- Almost all accessories can be mounted
- Short switching times and low power consumption
- Mechanically lockable
- Compatible to ABB pro M compact 9 mm pushbuttons and indicator lights
- Compatible to ABB Programmable Logic Controllers
- User safety due to hand-switching recognition
- Low stand-by current
- Connecting has to be done by a 10-pole Micro Fit 3.0 plug (not included in delivery)
- Two versions
 - S800-RSU-H IEC-Version according to IEC 60947-2
 - S800W-RSU World version according to IEC 60947-2 and UL489



Winner 2010 in the category Photovoltaics

Properties

Special features of S800S-SCL-SR

2



2CC0412028F0001

Group protection

In comparison to other short-circuit limiter you need only one S800S-SCL-SR for several motor starters or high performance miniature circuit breakers. With the requirement that the rated current of the short-circuit limiter does not exceed the total sum of the rated S800S currents of all downstream motor starters or circuit breakers. Furthermore the sum of all load currents including inrush currents shall not exceed the maximum permissible load of the S800S-SCL-SR. Therefore the main application of the new S800S-SCL-SR is group protection. Several downstream motor protection combinations or several high performance miniature circuit breakers can be protected with only one S800S-SCL-SR.

Single-line protection

For single-line protection we recommend to use the standard short-circuit limiter S803S-SCL. It has a toggle and will trip in case of a failure.

Current continuity


In case of a failure by using the S800S-SCL-SR as group protection only the defective device will trip; all other devices will keep doing their work. Therefore you will have a very low breakdown, because only one motor will stop and not all of them.



2CC0413364F0001

Maximum system availability is given.


Schematic examples for rated currents up to 100 A

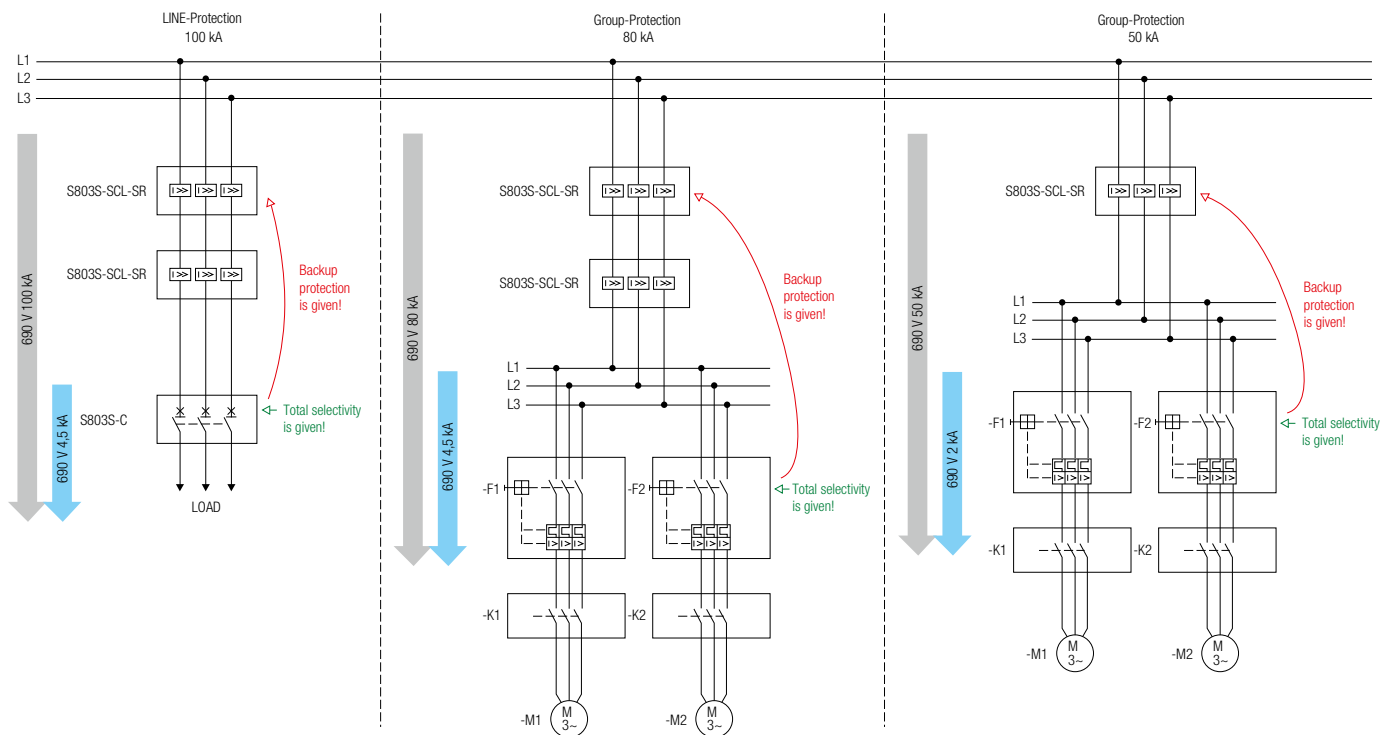

Short-circuit breaking capacity only downstream device
 Short-circuit breaking capacity coordinated group S800S-SCL-SR

Properties

Special features of S800HV-SCL-SR

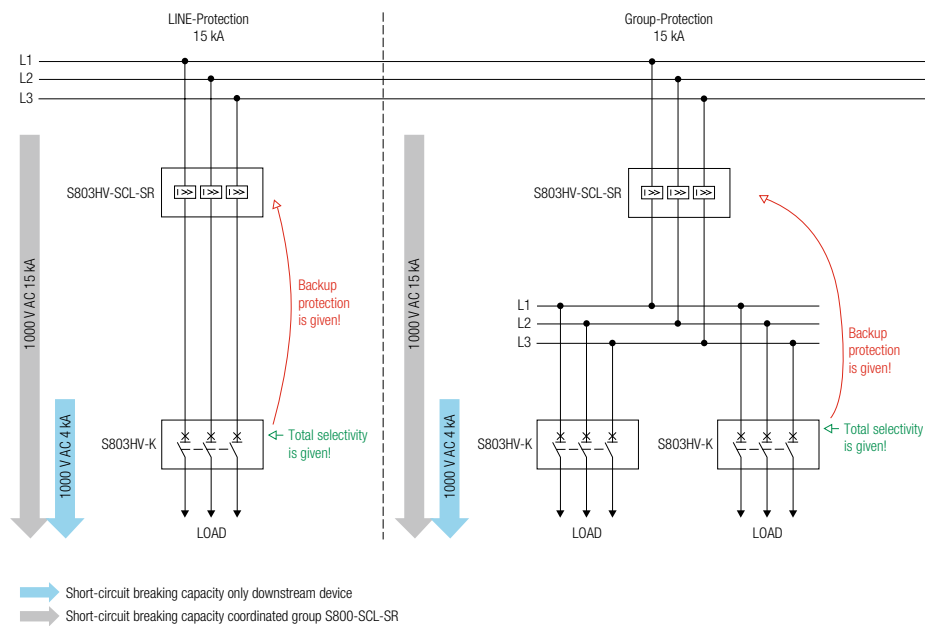

Properties

International device releases

2

Unique: Conformity to standards and quality assurance

Both the S800 high performance MCB as well as its accessories comply to international standards EN/IEC 60898-1, IEC 60947-2 and UL 489. Conformity to the above-mentioned product standards and guidelines are certified by the electrosuisse, a member of the IECEE and the Underwriters Laboratories Inc. The quality assurance system of ABB Switzerland Ltd. Low Voltage Products complies to the international standard ISO 9001:2000. The efforts of ISO14001-certified ABB Switzerland Ltd. Low Voltage Products within the field of environmental protection are not only limited to compliance to international standards; we are also engaged and active of our own accord in protecting the environment – and for achieving the targets of reduction in CO₂ emissions we have received as confirmation the EnAW label of the economic energy agency. To retain this label, an independent check is made every two years.


We are committed to a holistic approach in the reduction of environmental pollution. Among other things, this is manifested in our choice of non-toxic plastics, recyclable packaging material and environmentally sound handling of resources.




Approvals

Properties Accessories

Electrical properties

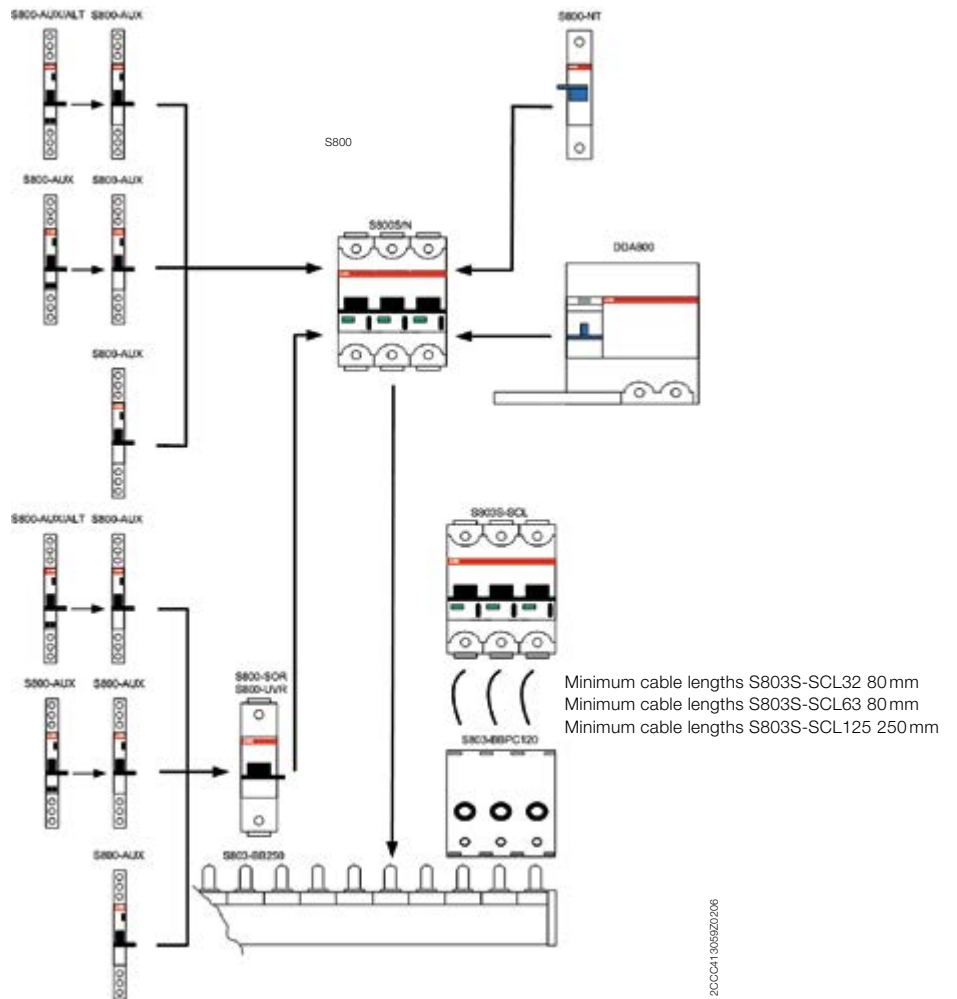

2CCC41305920206

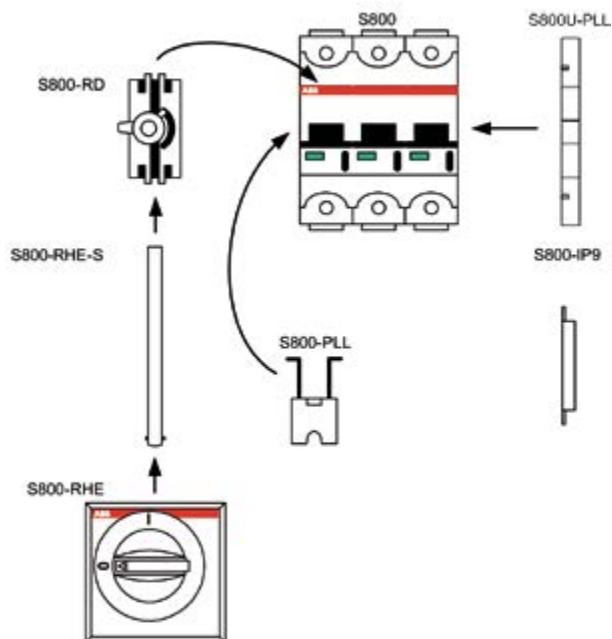

2CCC4130572002



20CC413069F0001

S800-AUX

Auxiliary contact for external display

The S800-AUX auxiliary contact is for electrical display of the operating state of the high performance MCB. Both changeover contacts always switch simultaneously with the live conductor contact and detect the following operating states:

- Manual tripping
- Tripping due to thermal overload
- Tripping due to magnetic overload (short-circuit)

Mode of function of the test button

The test button is operated by a tool and allows the user to simulate the mode of function of the auxiliary contact when switched on without tripping the high performance MCB itself.

Mode of function of the two changeover contacts

- Off position of the high performance MCB contacts 11–12 and 21–22 closed
- On position of the high performance MCB contacts 11–14 und 21–24 closed

Mounting ability of the auxiliary contact

- Two S800-AUX auxiliary contacts can be mounted by the user at the left on the high performance MCB.



20CC413070F0001

S800-AUX/ALT

Combined auxiliary and signal contact for the external display

The S800-AUX/ALT combined auxiliary and signal contact is used for electrical signaling of the operating state of the high performance MCB.

The **AUX** auxiliary contact always switches simultaneously with the live conductor contact and detect the following forms of tripping:

- Manual switch on/off
- Tripping due to thermal overload
- Tripping due to magnetic overload (short-circuit)
- Tripping by S800-SOR or S800-UVR

The **ALT** signal contact detects the following forms of tripping of the high performance MCB:

- Tripping due to thermal overload
- Tripping due to magnetic overload (short-circuit)
- Tripping by S800-SOR or S800-UVR

Mode of function of the test button

The test button is operated by a tool and allows the user to simulate the mode of function of the combined auxiliary and signal contact when switched on without tripping the high performance MCB itself.

Mode of function of the ALT reset button

The reset button, which can be used at will, resets the **ALT** signal contact after a tripping. The high performance MCB is switched on independent of the state of the **ALT** signal contact.

Mode of function of the AUX changeover contact

- Off position of the high performance MCB Contact 11–12 closed
- On position of the high performance MCB Contact 11–14 closed

Mode of function of the ALT changeover contact

- No ALT tripping Contact 95–96 closed
- ALT tripping Contact 95–98 closed



20CC0413365F0001

S800-NT
Disconnectable neutral conductor 63 A

The S800 high performance MCB is force-opened before actuating the disconnectable neutral conductor S800-NT.

Mounting ability of the S800-NT neutral conductor

- The neutral conductor can be mounted by the user at the right on the high performance MCB.



20CC0413365F0001

S800-RSU-H IEC version
S800W-RSU World version
Remote Switching Units for High Performance MCB

The S800-RSU makes the use of S800 even more convenient. Driven by a brushless high precision DC motor, S800-RSU ensures fast remote-controlled operation.

Mounting ability

The S800-RSU is mountable on any multipole S800 High Performance MCB. Wiring and operation is feasible on field. The connection has to be done by a 10-pole Micro Fit 3.0 (not included in delivery). S800-RSU operated with standard MDRC pushbuttons and indicator lights or can be done via programmable logic controllers (PLCs).

Switching times

OFF -> ON <<500 ms
 from signal to contact closing

ON -> OFF <<250 ms
 from signal to contact opening

TRIP -> OFF -> ON <<1500 ms
 from signal to contact closing

For differing requirements, please contact your local ABB partner

Safety Intelligence

- When detecting manual use, inputs are deactivated for 10 seconds
- If the spindle is rotated more than 360°, all outputs become active
- Manual switch off via lever is possible (S803, S804)
- Manual switch on via lever is not possible (S802)
- RSU is locked for five minutes after three switching attempts leading to a trip
- Mechanical fixation via lock slider blocking the spindle



2CC041328F0001

S800-RSU-CP

S800-RSU cable incl. 10-pole Micro Fit 3.0 plug

Length of cable: 3 meters
 Cross section: 10 x 0.5 mm²
 Temperature range:
 moving state: -5 °C ... +70 °C
 fixed state: -30 °C ... +80 °C
 Rated voltage: 300V
 Conductor resistance: 39.0 Ω/km
 Approvals: S+, UL

S800-RSU-P

10-pole Micro Fit 3.0 plug

10-pole Micro Fit 3.0 plug with 12 loose crimped contacts. You need tongs for connecting.



2CC041328F0001

S800-SOR

Shunt opening release

The S800-SOR shunt opening release is for remote release of the S800- high performance MCB using an electrical impulse. Operation of the trigger is guaranteed at a voltage between 70 % and 110 % of the rated mains voltage U_n both for AC and DC.

Mounting ability of the S800-SOR operating current release

– The S800-SOR can be mounted by the user at the left side of the high performance MCB.



2CC041328F0001

S800-UVR

Undervoltage release

The S800-UVR undervoltage release can be used as an emergency-stop cut-as by use of suitable emergency stop buttons. The undervoltage release switches the power supply to the high performance MCB off in case of a failure or if the value falls below $0.7 \times U_n$. After tripping, the high performance MCB can be switched back on as soon as the voltage is over $0.85 \times U_n$.

Mounting ability of the S800-UVR undervoltage release

– The S800-UVR can be mounted by the user at the left side of the high performance MCB.



2CC0413019F0002

S803S-SCL

Short-circuit current limiter

The S803S used together with an S803S-SCL ensures reliable switch-off of short-circuit currents up to **100 kA**, at an operating voltage of 440 VAC and over the entire rated current range of up to 125 A.

For applications at 690 VAC, the combination of S803S-SCL ensures reliable short-circuit protection up to **50 kA**; here also, this is ensured over the entire rated current range up to 125 A, typical for the S800.

| Example combinations | Rated operational voltage U_e | Ultimate short-circuit breaking capacity I_{cu} | Service short-circuit breaking capacity I_{cs} |
|----------------------|---------------------------------|---|--|
| S803S-SCL125 + | 440VAC | 100 kA | 100 kA |
| S803S-C125 | 690VAC | 50 kA | 50 kA |
| S803S-SCL63 + | 440VAC | 100 kA | 100 kA |
| S803S-K63 | 690VAC | 50 kA | 50 kA |
| S803S-SCL32 + | 440VAC | 100 kA | 100 kA |
| S803S-B16 | 690VAC | 50 kA | 50 kA |




20CC412028F0001

S800-SCL-SR
Self-resetting short-circuit limiter

The S800-SCL-SR can be used together with S800S High Performance MCB or Manual Motor Starters. It limits the short-circuit current until the downstream means of protection trips. Its current continuity makes it as the ideal solution for group protection. All parallel branches remain operative.

Minimum cable length between S800-SCL-SR/S803S-SCL and downstream devices (Connection has to be short-circuit proofed acc. to IEC 61439-1)

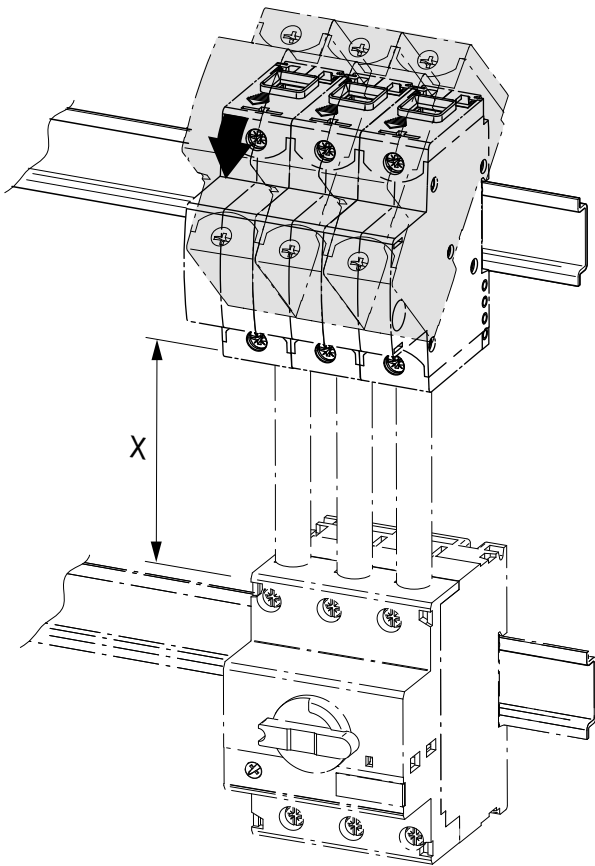

20CC4132180Z0001

MS/M0325
MS/M0132
S800

| S800-SCL-SR/S803S-SCL | min. length X | min. cross section |
|------------------------------|----------------------|---------------------------|
| 32 A | 80 mm | 6 mm ² |
| 63 A | 80 mm | 16 mm ² |
| 100/125 A | 250 mm | 35 mm ² |



20CC0413062F0001

S800-RD Rotary drive

The rotary drive for 2–4 pole devices can be delivered for assembly on the switching field door. Switching is effortless due to the ergonomic design of the swivel lever. It is equipped with a lock for the OFF position that prevents switching on of the S800 high performance MCB. The slot hole of the lock can accept up to 3 padlocks with lug diameters of 7 mm (not included in delivery). Operation of the trigger and a view of the characteristics are not prevented. Additionally, a rotary drive can also be supplied to switch machines; it has a red grip on a yellow background.

The rotary drive on the switching field door is comprised of the following three components:

- Rotary handle S800-RHE-H, -EM
- Axle (500 mm) S800-RHE-S



20CC0413068F0001

S800-IP9 Intermediate piece

The S800-IP9 intermediate piece fits the profile of the high performance MCB and is used to fill in empty device slots. Thanks to its width of just 9mm, the slots of all devices of the S800 range can be expanded using this intermediate piece.



20CC0413068F0001

S800-PLL Padlock device


The S800-PLL padlock device safely prevents unintentional switching on and off. Simply insert the lug of the padlock device through the borehole on the high performance MCB and lock with a padlock with lug diameter \varnothing 4 mm (not included in delivery). Even when the high performance MCB is secured with an padlock device against unintentional switching off, tripping remains possible in case of overload or short-circuit by the S800-SOR, S800-UVR and DDA800.



20CC0413303F0001

S800U-PLL Locking device – for the American market

The S800U-PLL locking device prevents unintentional switch-on or off of the S800U high performance MCB, or switch on/off by third parties. It is mounted at the side of the high performance MCB and can only be removed using a special tool. A standardised American padlock (not included in delivery) is hung onto the round recess on the locking device, which can be secured by max six locks. Of course, tripping is possible by the S800-SOR or S800-UVR in case of overload or short-circuit.

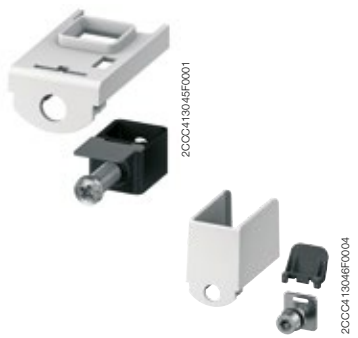

S800-CT, -RT
Interchangeable adapter kit

The S800 interchangeable adapter kit allows the cable clamp – ring terminal connections to be exchanged. Ring terminal connection -> Cage Terminal connection

The following is included in the S800-CT replaceable interchangeable adapter kit:

- Cage terminal
- Insulator


Cage Terminal connection -> ring terminal connection

The following is included in the S800-RT replaceable interchangeable adapter kit:

- Nut, insulation nut – cable lug, Allen screw
- Insulator with 25 mm insulation walls

S800-ILS
Identification labelling system

The individual identification labelling system for ILS legend plates is a DIN A5 polyester foil for inkjet and laser printers with high temperature resistance (if a laser printer is used please check whether self-sticking foils with a thickness of 250 µm can be printed with it). The 3M™9471 LE adhesive backing is UL-approved with Appl. No. MH 11410. The single plates are butt-cut on one side. Can be manually labelled with ink, pen, pencil and felt pen.




S802-LINK50
Pole connector up to 50 A

The pole connector S802-LINK50 can be used up to 50 A.



S802-LINK125
Pole connector up to 125 A

The pole connector S802-LINK125 can be used up to 125 A.

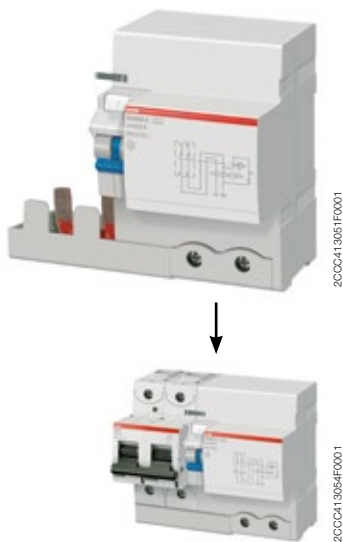

DDA800
RCD Block

RCD blocks from the DDA800 family can be connected to the S800 high performance MCB. The DDA800 can be used both for sine-shaped AC fault currents (type AC) as well as for pulsed DC fault currents (type A). Typical ABB: Selective and short-term delay devices are also available The functionality of the switching device can be checked at any time with the test button. The DDA800 FI switches ensure effective protection against fire and explosion. Devices with $I_n \leq 30 \text{ mA}$ guarantee the protection of persons against shock currents caused by both direct and indirect touching in addition to the obligatory safety measures prescribed by the safety and accident-prevention regulations.

The DDA800 blocks comply to standard:

- EN 60947-2 Annex B

Mounting ability of the DDA800 RCD blocks

- The leakage current trigger can be mounted by the user at the right on the live conductor.

Properties Accessories

2



20CC413048F0001

S800 Busbar system

The S800 busbar system is comprised of:

| | |
|--------------|---|
| S804-BBPC120 | 120 mm ² feed block, 4-pole |
| S804-BB250 | 250 A busbar, 3-pole and neutral with 24 contacts pins |
| S804-BB6 | 250 A busbar, 3-pole with 6 contacts pins |
| S803-BB250 | 250 A busbar, 3-pole with 24 terminal lugs and 2 end caps |
| S803-BBPC120 | 120 mm ² feed block, 3-pole |
| S800-BBIC | Optional contact-protection cap for exposed terminal lugs |
| S800-END | Optional end cap |

The busbar, which can be shortened in length by the user, ensures the safe and rational connection of the S800 high performance MCB. A cable cross-section of up to 120 mm² can be connected at the feed block.



20CC413048F0001

Unifix H

The Unifix H System with feed module up to 400 A provides the user a high standardised design of energy distribution. The wide range of assembly and adapter combinations which are also available for the S800 range increase flexibility allowing for compact and cost-effective design of the electrical distribution network.

The following adapters are available for the S800 range:

- ED2557 L1 ≤32 A
- ED2558 L2 ≤32 A
- ED2559 L3 ≤32 A
- ED2560 N ≤32 A
- ED2551 L1 125 A
- ED2552 L2 125 A
- ED2553 L3 125 A
- ED2554 N 125 A
- ED2550 filler

Rated short-circuit capacity I_{cn}

Compliant to EN 60898-1

The maximum current which a switching device can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated ultimate short-circuit breaking capacity I_{cu}

Compliant to EN 60947-2

Ultimate short-circuit breaking capacity that a circuit breaker can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated service short-circuit breaking capacity I_{cs}

Compliant to EN 60947-2

Service short-circuit breaking capacity that a circuit breaker can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated insulation voltage U_i

The rated insulation voltage is the voltage to which dielectric checks and creepage distances refer. The maximum rated operational voltage must not exceed its rated insulation voltage.

Rated impulse withstand voltage U_{imp}

Peak of a withstand voltage of a specified form and polarity with which the circuit can be loaded under specified test conditions without a breakdown and to which clearances relate. The rated impulse withstand voltage must be equal to or greater than the values of the withstand over-voltages (transient overvoltages) which occur in the System in which the device is used.

Backup protection

Assignment of two overcurrent protective devices in series, where the protective device, generally but not necessarily on the supply side, effects the overcurrent protection with or without the assistance of the other protective device and prevents excessive stress on the latter [IEC 60947-1, definition 2.5.24].

Total selectivity

Overcurrent discrimination where, in the presence of two overcurrent protective devices in series, the protective device on the load side effects the protection without causing the other protective device to operate [IEC 60947-2, definition 2.17.2].

Partial selectivity

Overcurrent discrimination where, in the presence of two overcurrent protective devices in series, the protective device on the load side effects the protection up to a given level of overcurrent, without causing the other protective device to operate [IEC 60947-2, definition 2.17.3].

Table of content S800

Technical data

| | |
|-------------|------|
| S800S | 3/2 |
| S800N | 3/5 |
| S800C | 3/7 |
| S800B | 3/9 |
| S800HV | 3/10 |
| S800U | 3/12 |
| S800PV | 3/16 |
| Accessories | 3/21 |

230 V Let-through energies

| | |
|---------------------|------|
| S800S-B, -C, -D, -K | 3/37 |
| S800N-B, -C, -D | 3/40 |
| S800C-B, -C, -D, -K | 3/41 |
| S800B-B, -C, -D, -K | 3/42 |
| S800U-K, -Z | 3/43 |

230 V Let-through current

| | |
|---------------------|------|
| S800S-B, -C, -D, -K | 3/44 |
| S800N-B, -C, -D | 3/47 |
| S800C-B, -C, -D, -K | 3/48 |
| S800B-B, -C, -D, -K | 3/49 |
| S800U-K, -Z | 3/50 |

Technical data

S800S

3

| | S800S | S803S-KM | S800S-UC |
|--|---|---|---|
| General Data | | | |
| Tripping characteristics | B, C, D, K, | KM | UCB, UCK |
| Standards | IEC 60947-2, EN 60898-1 | IEC / EN 60947-2 | IEC / EN 60947-2 |
| Poles | 1 ... 4 | 3 | 1 ... 4 |
| Rated current I_n | A 6 ... 125 | 20 ... 80 | 10 ... 125 |
| Rated frequency f | Hz 50/60 | 50/60 | DC |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V AC 690 | AC 690 | DC 1500 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV 8 | 8 | 8 |
| Overvoltage category | IV | IV | III |
| Pollution degree | 3 | 3 | 2 |
| Suitability for isolation | yes | yes | yes |
| Data acc. to IEC/EN 60898-1 | | | |
| Rated operational voltage U_e | V AC 230/400 | – | – |
| Min. operating voltage | V AC 12 | – | – |
| Rated short-circuit capacity I_{cs} | kA Char. B, C, D: 230/400 V (10 ... 80 A) = 25 kA | – | – |
| Reference temperature for tripping characteristics | $^{\circ}$ C 30 $^{\circ}$ C (Char. B, C, D) | – | – |
| Electrical and Mechanical Endurance | ops 10 ... 32 A: 10 000 electrical/mechanical 40 ... 100 A: 6000 electrical/4000 mechanical 125 A: 4000 electrical/6000 mechanical | – | – |
| Service short-circuit capacity I_{es} | kA Char. B, C, D: 230/400 V (10 ... 80 A) = 12.5 kA | – | – |
| Data acc. to IEC/EN 60947-2 | | | |
| Rated operational voltage U_e | V AC 400/690 DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole) | AC 690 | DC 250 (1-pole) DC 500 (2-pole) DC 750 (3-pole) DC 750 (4-pole) (63 ... 125 A) DC 1000 (4-pole) (10 ... 50 A) |
| Min. operating voltage | V AC 12 | AC 12 | – |
| Rated ultimate short-circuit capacity I_{cu} | kA AC 240/415 V = 50 kA AC 254/440 V = 30 kA AC 400/690 V (up to 80 A) = 6 kA AC 400/690 V (100 ... 125 A) = 4.5 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA | AC 240/415 V = 50 kA AC 254/440 V = 30 kA AC 400/690 V = 6 kA DC 375 V = 30 kA | DC 250 V (1-pole) = 50 kA DC 500 V (2-pole) = 50 kA DC 750 V (3-pole) = 50 kA DC 750 V (4-pole) = 50 kA |
| Rated service short-circuit capacity I_{cs} | kA AC 240/415 V = 40 kA AC 254/440 V (up to 80 A) = 22.5 kA AC 254/440 V (100 ... 125 A) = 15 kA AC 400/690 V (up to 80 A) = 4 kA AC 400/690 V (100 ... 125 A) = 3 kA DC 125 V (1-pole) = 30 kA DC 250 V (2-pole) = 30 kA DC 375 V (3-pole) = 30 kA DC 500 V (4-pole) = 30 kA | DC 375 V = 30 kA | DC 250 V (1-pole) = 50 kA DC 500 V (2-pole) = 50 kA DC 750 V (3-pole) = 50 kA DC 750 V (4-pole) = 50 kA |
| Reference temperature for tripping characteristics | $^{\circ}$ C B, C, D: 30 $^{\circ}$ C K: 40 $^{\circ}$ C | only magnetic release | UCB: 30 $^{\circ}$ C UCK: 40 $^{\circ}$ C |
| Electrical and Mechanical Endurance | ops 6 ... 32 A: 10 000 electrical/ 10 000 mechanical 40 ... 100 A: 6000 electrical/ 4000 mechanical 125 A: 4000 electrical/ 6000 mechanical | 20 ... 32 A: 10 000 electrical/ 10 000 mechanical 20 ... 32 A: 10 000 electrical/ mechanical 40 ... 80 A: 6000 electrical/ 4000 mechanical | 10 ... 100 A: 1500 electrical/ 8500 mechanical 125 A: 1000 electrical/ 7000 mechanical |

| | S800S | S803S-KM | S800S-UC |
|---|-----------------|---|----------|
| Mechanical Data | | | |
| Housing | | Material group I, RAL 7035 | |
| Toggle | | black, lockable | |
| Classification acc. To NF F 126-101, NF F 16-102 | | I3, F2 | |
| Protection degree acc. to EN 60529 | | IP20; IP40(actuating end only) | |
| Shock resistance acc. to IEC/EN 60068-2-31 | | IEC 61373 Cat. 1 Class B, 5g / 30 ms acc. To IEC 60068-27 Test Ea | |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2 - 13.2Hz / 1 mm 13.2 - 100Hz / 0.7g with load 100% x I _e | |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | 12 + 12 cycle with 55 °C/90–96 % and 25 °C/95–100 % | |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | 16 hours 55 °C / 2 hours 70 °C with damp heat 55 % | |
| Ambient temperature | °C | –25 ... +60 | |
| Storage temperature | °C | –40 ... +70 | |
| Installation | | | |
| Terminal | | Failsafe cage or ringlug terminal | |
| Connections (top/bottom) – C _u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible | |
| Tightening torque | Nm | 3.5 | |
| | in-lbs. | 31 | |
| Screwdriver | | POZI 2 | |
| Mounting | | EN 60715 | |
| Mounting position | | any | |
| Supply | | any | |
| Dimensions and weight | | | |
| Pole dimensions (H x L x W) | mm | 82.5 x 95 x 26.5 | |
| Pole weight | g | ca. 240 | |

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

| Rated current I _n [A] | Internal resistance R _i [mΩ] | | | Power loss P _v [W] | | |
|-------------------------------------|--|------|----------|----------------------------------|-----|----------|
| | B, C, D, K | KM | UCB, UCK | B, C, D, K | KM | UCB, UCK |
| 6 | 51.7 | – | – | 1.8 | – | – |
| 8 | 27.2 | – | – | 1.7 | – | – |
| 10 | 15.2 | – | 15.2 | 1.5 | – | 1.5 |
| 13 | 12.1 | – | 12.1 | 2 | – | 2 |
| 16 | 12.1 | – | 12.1 | 3.1 | – | 3.1 |
| 20 | 8.7 | 2.7 | 8.7 | 3.5 | 1.1 | 3.5 |
| 25 | 6.8 | 3 | 6.8 | 4.3 | 1.9 | 4.3 |
| 32 | 3.1 | 1.7 | 3.1 | 3.2 | 1.7 | 3.2 |
| 40 | 2.3 | 1.6 | 2.3 | 3.7 | 2.6 | 3.7 |
| 50 | 1.7 | 1.1 | 1.7 | 4.3 | 2.8 | 4.3 |
| 63 | 1.6 | 1 | 1.6 | 6.4 | 4 | 6.4 |
| 80 | 1 | 0.75 | 1 | 6.4 | 5 | 6.4 |
| 100 | 0.8 | – | 0.8 | 8 | – | 8 |
| 125 | 0.6 | – | 0.6 | 9.4 | – | 9.4 |

Technical data

S800S

Maximum permissible earth-fault loop impedance Z_s at U_0 230 V* to ensure compliance with the requirements of IEC 60364-4

The instantaneous release of the MCB ensures an operating time of max. 0.1 s (TN system). Determined according to IEC 60364-5-52 / VDE 0100-520 and DIN VDE 0100-520 sheet 2:2002 (source impedance 300 mΩ, c = 0.95 and conductor temperature 70 °C = factor 0.8). The internal resistance of the MCB is included.

* U_0 : rated voltage against earthed conductor; for U_n : AC 240V multiply Z_s by 1.04, for U_n : AC 254V multiply Z_s by 1.10, for U_n : AC 400V multiply Z_s by 1.74

| Rated current (A) | B | C max. Z_s (Ω) | D | K |
|-------------------|-----|---------------------|-----|-----|
| 6 | | on request | | |
| 8 | | on request | | |
| 10 | 4.8 | 2.4 | 1.5 | 1.5 |
| 13 | 3.7 | 1.8 | 1.1 | 1.1 |
| 16 | 3.0 | 1.5 | 0.9 | 0.9 |
| 20 | 2.4 | 1.2 | 0.7 | 0.7 |
| 25 | 1.9 | 1.0 | 0.6 | 0.6 |
| 32 | 1.5 | 0.7 | 0.5 | 0.5 |
| 40 | 1.2 | 0.6 | 0.4 | 0.4 |
| 50 | 1.0 | 0.5 | 0.3 | 0.3 |
| 63 | 0.8 | 0.4 | 0.2 | 0.2 |
| 80 | 0.6 | 0.3 | 0.2 | 0.2 |
| 100 | 0.5 | 0.2 | 0.1 | 0.1 |
| 125 | 0.4 | 0.2 | 0.1 | 0.1 |

Technical data

S800N

| | | S800N |
|---|-------|---|
| General Data | | |
| Tripping characteristics | | B, C, D |
| Standards | | IEC 60947-2, EN 60898-1 |
| Poles | | 1 ... 4 |
| Rated current I_n | A | 6 ... 125 |
| Rated frequency f | Hz | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 690 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overvoltage category | | IV |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60898-1 | | |
| Rated operational voltage U_n | V | AC 230/400 |
| Min. operating voltage | V | AC 12 |
| Rated short-circuit capacity I_{cn} | kA | AC 230/400V (10 ... 80A) = 20 kA |
| Reference temperature for tripping characteristics | °C | 30 °C (Char. B, C, D) |
| Electrical and Mechanical Endurance | ops. | 10 ... 32A: 10 000 electrical/mechanical 40 ... 100A: 6000 electrical/4000 mechanical 125A: 4000 electrical/6000 mechanical |
| Service short-circuit capacity I_{cs} | kA | 230/400V (10 ... 80A) = 10 kA |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_n | V | AC 400/690 DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole) |
| Min. operating voltage | V | AC 12 |
| Rated ultimate short-circuit capacity I_{cu} | kA | AC 240/415V = 36 kA AC 254/440V = 20 kA AC 400/690V = 4.5 kA DC 125V (1-pole) = 20 kA DC 250V (2-pole) = 20 kA DC 375V (3-pole) = 20 kA DC 500V (4-pole) = 20 kA |
| Rated service short-circuit capacity I_{cs} | kA | AC 240/415V = 30 kA AC 289/500V (80 ... 125A) = 5 kA AC 400/690V = 3 kA DC 125V (1-pole) = 20 kA DC 250V (2-pole) = 20 kA DC 375V (3-pole) = 20 kA DC 500V (4-pole) = 20 kA |
| Reference temperature for tripping characteristics | °C | 30 °C |
| Electrical and Mechanical Endurance | ops. | 6 ... 32A: 10 000 electrical/mechanical 40 ... 100A: 6000 electrical/4000 mechanical 125A: 4000 electrical/6000 mechanical |
| Mechanical Data | | |
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Classification acc. To NF F 126-101, NF F 16-102 | | I3, F2 |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | IEC 61373 Cat. 1 Class B, 5g / 30ms acc. To IEC 60068-27 Test Ea |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2–13.2 Hz/1 mm 13.2–100 Hz/0.7 g with load 100% x I_n |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | 12 + 12 cycle with 55 °C/90–96 % and 25 °C/95–100 % |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | 16 hours 55 °C/2 hours 70 °C with damp heat 55 % |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |

Technical data

S800N

3

| | | S800N |
|--|-----------------|--|
| Installation | | |
| Terminal | | Failsafe cage or ringlug terminal |
| Connections (top/bottom) – C _u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible |
| Tightening torque | Nm in-lbs. | 3.5 31 |
| Screwdriver | | POZI 2 |
| Mounting | | EN 60715 |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 82.5 x 95 x 26.5 |
| Pole weight | g | ca. 240 |

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

| Rated current I _n [A] | Internal resistance R _i [mΩ] B, C, D | Power loss P _v [W] B, C, D |
|-------------------------------------|---|---|
| 6 | 51.7 | 1.8 |
| 8 | 27.2 | 1.7 |
| 10 | 15.2 | 1.5 |
| 13 | 12.1 | 2 |
| 16 | 12.1 | 3.1 |
| 20 | 8.7 | 3.5 |
| 25 | 6.8 | 4.3 |
| 32 | 3.1 | 3.2 |
| 40 | 2.3 | 3.7 |
| 50 | 1.7 | 4.3 |
| 63 | 1.6 | 6.4 |
| 80 | 1.0 | 6.4 |
| 100 | 0.8 | 8 |
| 125 | 0.6 | 9.4 |

Maximum permissible earth-fault loop impedance Z_s at U₀ 230 V* to ensure compliance with the requirements of IEC 60364-4

The instantaneous release of the MCB ensures an operating time of max. 0.1 s (TN system). Determined according to IEC 60364-5-52 / VDE 0100-520 and DIN VDE 0100-520 sheet 2:2002 (source impedance 300 mΩ, c = 0.95 and conductor temperature 70 °C = factor 0.8). The internal resistance of the MCB is included.

* U₀: rated voltage against earthed conductor; for U₀: AC 240 V multiply Z_s by 1.04, for U₀: AC 254 V multiply Z_s by 1.10, for U₀: AC 400 V multiply Z_s by 1.74

| Rated current (A) | B | C max. Z _s (Ω) | D |
|-------------------|-----|------------------------------|-----|
| 6 | | on request | |
| 8 | | on request | |
| 10 | 4.8 | 2.4 | 1.5 |
| 13 | 3.7 | 1.8 | 1.1 |
| 16 | 3.0 | 1.5 | 0.9 |
| 20 | 2.4 | 1.2 | 0.7 |
| 25 | 1.9 | 1.0 | 0.6 |
| 32 | 1.5 | 0.7 | 0.5 |
| 40 | 1.2 | 0.6 | 0.4 |
| 50 | 1.0 | 0.5 | 0.3 |
| 63 | 0.8 | 0.4 | 0.2 |
| 80 | 0.6 | 0.3 | 0.2 |
| 100 | 0.5 | 0.2 | 0.1 |
| 125 | 0.4 | 0.2 | 0.1 |

Technical data

S800C

S800C

| General Data | | |
|---|-----------------|--|
| Tripping characteristics | | B, C, D, K |
| Standards | | EN 60947-2, EN 60898-1 |
| Poles | | 1 ... 4 |
| Rated current I_n | A | 10 ... 125 |
| Rated frequency f | Hz | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 500 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overtoltage category | | IV |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60898-1 | | |
| Rated operational voltage U_n | V | AC 230/400 |
| Min. operating voltage | V | AC 12 |
| Rated short-circuit capacity I_{cn} | kA | 15 kA |
| Reference temperature for tripping characteristics | $^{\circ}$ C | 30 $^{\circ}$ C (Char. B, C, D) |
| Electrical and Mechanical Endurance | ops. | 10 ... 32A: 10 000 electrical/mechanical 40 ... 100A: 6000 electrical/4000 mechanical 125A: 4000 electrical/6000 mechanical |
| Service short-circuit capacity I_{cs} | kA | Char. B, C, D: 230/400V = 7.5 kA |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_n | V | AC 254/440 DC 125 (1-pole) DC 250 (2-pole) DC 375 (3-pole) DC 500 (4-pole) |
| Min. operating voltage | V | AC 12 |
| Rated ultimate short-circuit capacity I_{cu} | kA | AC 240/415V = 25 kA AC 254/440V = 15kA DC 125V (1-pole) = 10 kA DC 250V (2-pole) = 10 kA DC 375V (3-pole) = 10 kA DC 500V (4-pole) = 10 kA |
| Rated service short-circuit capacity I_{cs} | kA | AC 240/415V = 18 kA AC 254/440V = 10 kA DC 125V (1-pole) = 10 kA DC 250V (2-pole) = 10 kA DC 375V (3-pole) = 10 kA DC 500V (4-pole) = 10 kA |
| Reference temperature for tripping characteristics | $^{\circ}$ C | B, C, D: 30 $^{\circ}$ C K: 40 $^{\circ}$ C |
| Electrical and Mechanical Endurance | ops. | 10 ... 32A: 10 000 electrical/mechanical 40 ... 100A: 6000 electrical/4000 mechanical 125A: 4000 electrical/6000 mechanical |
| Mechanical Data | | |
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Classification acc. To NF F 126-101, NF F 16-102 | | I3, F2 |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | IEC 61373 Cat. 1 Class B, 5 g / 30 ms acc. To IEC 60068-27 Test Ea |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2–13.2 Hz/1 mm 13.2–100 Hz/0.7 g with load 100% x le |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | $^{\circ}$ C/RH | 12 + 12 cycle with 55 $^{\circ}$ C/90–96% and 25%/95–100% |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | $^{\circ}$ C/RH | 16 hours 55 $^{\circ}$ C/2 hours 70 $^{\circ}$ C with damp heat 55% |
| Ambient temperature | $^{\circ}$ C | –25 ... +60 |
| Storage temperature | $^{\circ}$ C | –40 ... +70 |

Technical data

S800C

3

| | | S800C |
|--|-----------------|--|
| Installation | | |
| Terminal | | Failsafe cage or ringlug terminal |
| Connections (top/bottom) – C _u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible |
| Tightening torque | Nm in-lbs. | 3.5 31 |
| Screwdriver | | POZI 2 |
| Mounting | | EN 60715 |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 82.5 x 95 x 26.5 |
| Pole weight | g | ca. 240 |

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

| Rated current I _n [A] | Internal resistance R _i [mΩ] | Power loss P _v [W] |
|-------------------------------------|--|----------------------------------|
| | B, C, D, K | B, C, D, K |
| 10 | 15.2 | 1.5 |
| 13 | 12.1 | 2 |
| 16 | 12.1 | 3.1 |
| 20 | 8.7 | 3.5 |
| 25 | 6.8 | 4.3 |
| 32 | 3.1 | 3.2 |
| 40 | 2.3 | 3.7 |
| 50 | 1.7 | 4.3 |
| 63 | 1.6 | 6.4 |
| 80 | 1 | 6.4 |
| 100 | 0.8 | 8 |
| 125 | 0.6 | 9.4 |

Maximum permissible earth-fault loop impedance Z_s at U₀ 230 V* to ensure compliance with the requirements of IEC 60364-4

The instantaneous release of the MCB ensures an operating time of max. 0.1 s (TN system). Determined according to IEC 60364-5-52 / VDE 0100-520 and DIN VDE 0100-520 sheet 2:2002 (source impedance 300 mΩ, c = 0.95 and conductor temperature 70 °C = factor 0.8). The internal resistance of the MCB is included.

* U₀: rated voltage against earthed conductor; for U₀: AC 240V multiply Z_s by 1.04, for U₀: AC 254V multiply Z_s by 1.10, for U₀: AC 400V multiply Z_s by 1.74

| Rated current (A) | B | C | D | K |
|-------------------|-----|-------------------------|-----|-----|
| | | max. Z _s (Ω) | | |
| 10 | 4.8 | 2.4 | 1.5 | 1.5 |
| 13 | 3.7 | 1.8 | 1.1 | 1.1 |
| 16 | 3.0 | 1.5 | 0.9 | 0.9 |
| 20 | 2.4 | 1.2 | 0.7 | 0.7 |
| 25 | 1.9 | 1.0 | 0.6 | 0.6 |
| 32 | 1.5 | 0.7 | 0.5 | 0.5 |
| 40 | 1.2 | 0.6 | 0.4 | 0.4 |
| 50 | 1.0 | 0.5 | 0.3 | 0.3 |
| 63 | 0.8 | 0.4 | 0.2 | 0.2 |
| 80 | 0.6 | 0.3 | 0.2 | 0.2 |
| 100 | 0.5 | 0.2 | 0.1 | 0.1 |
| 125 | 0.4 | 0.2 | 0.1 | 0.1 |

Technical data

S800B

3

| | | S800B |
|---|-----------------|--|
| General Data | | |
| Tripping characteristics | | B, C, D, K |
| Standards | | IEC 60947-2, IEC 60898-1* |
| Poles | | 1 ... 4 |
| Rated current I_n | A | Char. B, C: 32 ... 125/Char. D, K: 32 ... 100 |
| Rated frequency f | Hz | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 440 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 4 |
| Overvoltage category | | III |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60898-1 | | |
| Rated operational voltage U_e | V | AC 230/400 |
| Min. operating voltage | V | AC 12 |
| Rated short-circuit capacity I_{cn} | kA | AC 230/400 = 10 kA |
| Reference temperature for tripping characteristics | $^{\circ}$ C | B, C, D: 30 $^{\circ}$ C |
| Electrical and Mechanical Endurance | ops. | 4000 |
| Service short-circuit capacity I_{cs} | kA | AC 230/400 = 7.5 kA |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_e | V | AC 230/400 |
| Min. operating voltage | V | AC 12 |
| Rated ultimate short-circuit capacity I_{cu} | kA | 16 kA |
| Rated service short-circuit capacity I_{cs} | kA | 10 kA |
| Reference temperature for tripping characteristics | $^{\circ}$ C | B, C, D: 30 $^{\circ}$ C K: 40 $^{\circ}$ C |
| Electrical and Mechanical Endurance | ops. | 32 ... 100A: 1500 electric; 8500 mechanic/125A: 1000 electric, 7000 mechanic |
| Mechanical Data | | |
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Classification acc. To NF F 126-101, NF F 16-102 | | I3, F2 |
| Protection degree acc. to EN 60529 | | IP20; IP40(actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | $^{\circ}$ C/RH | |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | $^{\circ}$ C/RH | |
| Ambient temperature | $^{\circ}$ C | -25 ... +60 |
| Storage temperature | $^{\circ}$ C | -40 ... +70 |
| Installation | | |
| Terminal | | Failsafe cage terminal |
| Connections (top/bottom) – C_u only | mm ² | 1 ... 50 stranded; 1 ... 70 flexible |
| Tightening torque | Nm in-lbs. | 3.5 31 |
| Screwdriver | | POZI 2 |
| Mounting | | EN 60715 |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 82.5 x 95 x 26.5 |
| Pole weight | g | ca. 240 |

* 06/2015

Typical internal resistances and power losses at 25 $^{\circ}$ C ambient temperature (per pole)

| Rated current I_n [A] | Internal resistance R_i [m Ω] | | Power loss P_v [W] | |
|----------------------------|--|------|-------------------------|------|
| | B, C | D, K | B, C | D, K |
| 32 | 3.1 | 3.1 | 3.2 | 3.2 |
| 40 | 2.3 | 2.3 | 3.7 | 3.7 |
| 50 | 1.7 | 1.7 | 4.3 | 4.3 |
| 63 | 1.6 | 1.6 | 6.4 | 6.4 |
| 80 | 1.0 | 1.0 | 6.4 | 6.4 |
| 100 | 0.8 | 0.8 | 8.0 | 8.0 |
| 125 | 0.7 | – | 10.9 | – |

Technical data

S800HV

3

General data

| | | |
|---------------------------|----|-------------|
| Tripping characteristic | | K |
| Standard | | IEC 60947-2 |
| Poles | | 1 ... 3 |
| Rated frequency f | Hz | 50/60 |
| Overvoltage category | | III |
| Pollution degree | | 2 |
| Suitability for isolation | | yes |

Data acc. to IEC 60947-2

| | | |
|---|------|-------------------------------|
| Rated operational voltage U_e | V | AC 580/1000 |
| Rated operational current I_n | A | 6 ... 125 |
| Rated ultimate short-circuit breaking capacity I_{cu} | kA | 4 (6 ... 63A) |
| | | 3 (80 ... 125A) |
| Rated service short-circuit breaking capacity I_{cs} | kA | 2.5 (6 ... 63A) |
| | | 2 (80 ... 125A) |
| Rated insulation voltage U_i | V | AC 1000 |
| Rated impulse withstand voltage U_{imp} | kV | 8 |
| Reference temperature for tripping characteristic | °C | 40 |
| Electrical and Mechanical endurance | ops. | 1500 electric / 8500 mechanic |

Mechanical data

| | | |
|--|----|---|
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Protection degree acc. to IEC / EN 60529 | | IP20; IP40 (actuating side only) |
| Classification acc. to NF F16-101, NF F 16-102 | | I3, F2 |
| Classification acc. to IEC 61373 (shock and vibration) | | Cat. 1, Class B |
| Shock resistance acc. to IEC / EN 60068-2-27 | | Test Ea: 5 g / 30 ms |
| Vibration resistance acc. to IEC / EN 60068-2-6 | | Test Fc: |
| | | 2–13.2 Hz / 1 mm |
| | | 13.2–100 Hz / 0.7 g |
| | | with load 100 % x I_e |
| Environmental conditions (damp heat) acc. to IEC / EN 60068-2-30 | | 12+12 cycle with 55 °C / 90–96 % RH and 25 °C / 95–100 % RH |
| Environmental conditions (dry heat) acc. to IEC / EN 60068-2-2 | | 16 hours 55 °C / 2 hours 70 °C / 55 % RH |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |

Installation

| | | |
|-----------------------------------|-----------------|------------------------|
| Terminal | | Failsafe cage terminal |
| Connection (top/bottom) – Cu only | mm ² | 1 ... 50 stranded |
| | | 1 ... 70 flexible |
| Tightening torque | Nm | 3.5 |
| Screwdriver | | POZI 2 |
| Mounting | | EN 60715 |
| Mounting position | | any |
| Supply side | | any |

Dimension and weight

| | | |
|----------------------------|----|-------------------|
| Pole dimension (H x L x W) | mm | 142 x 82.5 x 26.5 |
| Pole weight | kg | 0.27 |

Altitude

| | | | | | |
|---|------|-----------|--------------|--------------|-------------|
| Altitude | [m] | 2000 | 3000 | 4000 | 5000 |
| Rated impulse withstand voltage U_{imp} | [kV] | 8 | 8 | 8 | 8 |
| Rated operational voltage U_e | [V] | 1000 | 870 | 780 | 690 |
| Max. rated current I_n | [A] | 1 x I_n | 0.96 x I_n | 0.93 x I_n | 0.9 x I_n |

Technical data

S800HV

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

| Rated current I_n [A] | Internal resistance R_i [mΩ] K, Z | Power loss P_v [W] K, Z |
|----------------------------|---|---------------------------------|
| 6 | 51.7 | 1.8 |
| 8 | 27.2 | 1.7 |
| 10 | 15.2 | 1.5 |
| 13 | 12.1 | 2 |
| 16 | 12.1 | 3.1 |
| 20 | 8.7 | 3.5 |
| 25 | 6.8 | 4.3 |
| 32 | 3.1 | 3.2 |
| 40 | 2.3 | 3.7 |
| 50 | 1.7 | 4.3 |
| 63 | 1.6 | 6.4 |
| 80 | 1 | 6.4 |
| 100 | 0.8 | 8 |
| 125 | 0.6 | 9.4 |

Technical data

S800U

3

| | | S800U |
|---|-----------------|---|
| General Data | | |
| Tripping characteristics | | K, Z |
| Standards | | UL489 |
| Poles | | 1 ... 4 |
| Rated current I_e | A | 10–100 |
| Rated frequency f | Hz | 50/60 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | AC 690 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overvoltage category | | IV |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_e | V | AC 240/415 |
| Min. operating voltage | V | AC 12 |
| Rated ultimate short-circuit capacity I_{cu} | kA | AC 240 V (1-pole) = 30 kA AC 415 V (multipole) = 50 kA |
| Rated service short-circuit capacity I_{cs} | kA | AC 240 V (1-pole) = 25 kA AC 415 V (multipole) = 40 kA |
| Reference temperature for tripping characteristics | | 25 °C |
| Electrical and Mechanical Endurance | ops. | 10 ... 32A: 10 000 electrical/mechanical 40 ... 100A: 6000 electrical/4000 mechanical 125A: 4000 electrical/6000 mechanical |
| Data acc. to UL / CSA | | |
| Rated voltage | V | AC 240 |
| Rated interrupting capacity acc. to UL 1077 | kA | |
| Short-circuit current rating acc. to UL 489 | kA | AC 240 V (1-pole) = 30 kA AC 240 V (multipole) = 50 kA |
| Short-circuit current rating acc. to UL 489B | kA | |
| Reference temperature for tripping characteristics | | 25 °C |
| Electrical and Mechanical endurance | ops. | acc. to UL489 6000 electric; 4000 mechanic |
| Mechanical Data | | |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | IEC 61373 Cat. 1 Class B, 5 g/30 ms acc. To IEC 60068-27 Test Ea |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2–13.2 Hz/1 mm 13.2–100 Hz/0.7 g with load 100 % x I_e |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | 12 + 12 cycle with 55 °C/90–96 % and 25 °C/95–100 % |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | 16 hours 55 °C/2 hours 70 °C with damp heat 55 % |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |
| Installation | | |
| Terminal | | Failsafe cage or ringlug terminal |
| Connections (top/bottom) – C_u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible |
| | AWG | 10–30 A: 14–2 AWG 40–100 A: 1–8 AWG |
| Tightening torque | Nm | 3.5 |
| | in-lbs. | 31 |
| Screwdriver | | POZI 2 |
| Mounting | | any |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 95 x 26.5 x 82.5 |
| Pole weight | g | 240 |

Technical data

S800U

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

| Rated current I_n [A] | Internal resistance R_i [mΩ] K, Z | Power loss P_v [W] K, Z |
|----------------------------|---|---------------------------------|
| 10 | 15.2 | 1.5 |
| 15 | 12.1 | 2.7 |
| 20 | 8.7 | 3.5 |
| 25 | 6.8 | 4.2 |
| 30 | 3.1 | 2.8 |
| 40 | 2.3 | 3.7 |
| 50 | 1.7 | 4.3 |
| 60 | 1.6 | 5.8 |
| 70 | 1.0 | 4.9 |
| 80 | 1.0 | 6.4 |
| 90 | 0.8 | 6.5 |
| 100 | 0.8 | 8.3 |

Technical data

S804U-UCZ

3

| | | S804U-UCZ |
|---|---------|---|
| General Data | | |
| Tripping characteristics | | UCZ |
| Standards | | UL489 |
| Poles | | 4 |
| Rated current I_e | A | 10–80 |
| Rated frequency f | Hz | – |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | DC 1500 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overvoltage category | | IV |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_e | V | – |
| Min. operating voltage | V | – |
| Rated ultimate short-circuit capacity I_{cu} | kA | – |
| | | – |
| Rated service short-circuit capacity I_{cs} | kA | – |
| | | – |
| Reference temperature for tripping characteristics | °C | – |
| Electrical and Mechanical Endurance | ops. | – |
| Data acc. to UL / CSA | | |
| Rated voltage | V | DC 600 |
| Rated interrupting capacity acc. to UL 1077 | kA | – |
| Short-circuit current rating acc. to UL 489 | kA | 10 |
| Short-circuit current rating acc. to UL 489B | kA | – |
| Reference temperature for tripping characteristics | | 25°C |
| Electrical and Mechanical endurance | ops. | acc. to UL489 6000 electric; 4000 mechanic |
| Mechanical Data | | |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | – |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | – |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | – |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | – |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |
| Installation | | |
| Terminal | | Failsafe cage terminal |
| Connections Cu (top/bottom) | AWG | 10–32 A: 14-2 AWG 40–80 A: 1/0-8 AWG |
| Tightening torque | Nm | 3.5 |
| | in-lbs. | 31 |
| Screwdriver | | POZI 2 |
| Mounting | | any |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 142 x 26.5 x 82.5 |
| Pole weight | g | 240 |

Technical data

S804U-PVS

| | | S804U-PVS |
|---|-----------------|---|
| General Data | | |
| Tripping characteristics | | PVS |
| Standards | | UL489B (Photovoltaik) |
| Poles | | 4 |
| Rated current I_n | A | 5 |
| Rated frequency f | Hz | – |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | DC 1500 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overvoltage category | | IV |
| Pollution degree | | 3 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_o | V | – |
| Min. operating voltage | V | – |
| Rated ultimate short-circuit capacity I_{cu} | kA | – |
| Rated service short-circuit capacity I_{cs} | kA | – |
| Reference temperature for tripping characteristics | °C | – |
| Electrical and Mechanical Endurance | ops. | – |
| Data acc. to UL / CSA | | |
| Rated voltage | V | DC 1000 |
| Rated interrupting capacity acc. to UL 1077 | kA | – |
| Short-circuit current rating acc. to UL 489 | kA | – |
| Short-circuit current rating acc. to UL 489B | kA | 3 kA |
| Reference temperature for tripping characteristics | °C | 50 °C |
| Electrical and Mechanical endurance | ops. | acc. to UL489B 1000 with current; 1000 without current |
| Mechanical Data | | |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | – |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | – |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | – |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | – |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |
| Installation | | |
| Terminal | | Failsafe cage terminal |
| Connections (top/bottom) – C_u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible 14 AWG – 2 AWG |
| Flexible Cross-section of conductors (top/bottom) | mm ² | Single conductor per terminal, 75C wire 14 AWG – 2 AWG |
| Tightening torque | Nm in-lbs. | 3.5 31 |
| Screwdriver | | POZI 2 |
| Mounting | | any |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 142 x 26.5 x 82.5 |
| Pole weight | g | 240 |

Technical data

S800PV-S

3

| | | S800PV-S |
|--|-----------------|--|
| General Data | | |
| Tripping characteristics | | B |
| Standards | | IEC / EN 60947-2 |
| Poles | | 2 ... 4 |
| Rated current I_e | A | 10 ... 125 |
| Rated frequency f | Hz | — |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | DC 1500 |
| Rated impulse withstand voltage U_{imp} . (1.2/50 μ s) | kV | 8 |
| Overvoltage category | | III |
| Pollution degree | | 2 |
| Suitability for isolation | | yes |
| Data acc. to IEC/EN 60947-2 | | |
| Rated operational voltage U_e | V | 2-pole DC 800V: 10 ... 80 A DC 600V: 100 ... 125 A 3-pole DC 1200V: 10 ... 80 A DC 1000V: 100 ... 125 A 4-pole DC 1200V: 10 ... 125 A |
| Min. operating voltage | V | — |
| Rated ultimate short-circuit capacity I_{cu} | kA | 5 |
| Rated service short-circuit capacity I_{cs} | kA | 5 |
| Reference temperature for tripping characteristics | | 30 °C |
| Electrical and Mechanical Endurance | ops. | 10 ... 100A: 1500 electric; 8500 mechanic 125A: 1000 electric, 7000 mechanic acc. to IEC 60947-2 |
| Mechanical Data | | |
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Classification acc. To NF F 126-101, NF F 16-102 | | — |
| Protection degree acc. to EN 60529 | | IP20; IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | IEC 61373 Cat. 1 Class B, 5 g / 30 ms acc. To IEC 60068-27 Test Ea |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2–13.2 Hz/1 mm 13.2–100 Hz/0.7 g with load 100 % x I_e |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | 12 + 12 cycle with 55 °C/90–96 % and 25 °C/95–100 % |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | 16 hours 55 °C/2 hours 70 °C with damp heat 55 % |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –25 ... +70 |
| Installation | | |
| Terminal | | Failsafe cage or ringlug terminal |
| Connections (top/bottom) – C_u only | mm ² | 1 ... 50 stranded 1 ... 70 flexible |
| Tightening torque | Nm in-lbs. | 3,5 31 |
| Screwdriver | | POZI 2 |
| Mounting | | any |
| Mounting position | | any |
| Supply | | any |
| Dimensions and weight | | |
| Pole dimensions (H x L x W) | mm | 95 x 26.5 x 82.5 |
| Pole weight | g | 240 |

Technical data

S804PV-M

3

| | | S800PV-M | S802PV-M-H |
|---|-----------------|--|---|
| General Data | | | |
| Tripping characteristics | | – | – |
| Standards | | IEC / EN 60947-3 | IEC / EN 60947-3 |
| Poles | | 2 ... 4 | 2 (polarized) |
| Tripping characteristics | | none | none |
| Rated current I_n | A | 32, 63, 125 | 32, 63, 100 |
| Rated insulation voltage U_i acc. to IEC/EN 60664-1 | V | DC 1500 | DC 1500 |
| Rated impulse withstand voltage U_{imp} (1.2/50 μ s) | kV | | 8 |
| Overtoltage category | | | III |
| Pollution degree | | | 2 |
| Suitability for isolation | | | yes |
| Data acc. to IEC/EN 60947-3 | | | |
| Rated operational voltage U_e | V | DC 800 V: 2-pole DC 1200 V: 3-pole DC 1200 V: 4-pole | DC 1000 V: 2-pole |
| Min. operating voltage | V | – | – |
| Rated short-term withstand current I_{sw} | kA | | 1.5 |
| Rated short-circuit making capacity I_{cm} | kA | | 0.5 |
| Utilisation category | | | DC-21 A |
| Electrical and Mechanical Endurance | ops. | 10 ... 100 A: 1500 electric; 8500 mechanic 125 A: 1000 electric, 7000 mechanic acc. to IEC 60947-3 | |
| Mechanical Data | | | |
| Housing | | | Material group I, RAL 7035 |
| Toggle | | | black, lockable |
| Classification acc. To NF F 126-101, NF F 16-102 | | | |
| Protection degree acc. to EN 60529 | | | IP20, IP40 (actuating end only) |
| Shock resistance acc. to IEC/EN 60068-2-30 | | IEC 61373 Cat. 1 Class B, 5 g/30 ms acc. To IEC 60068-27 Test Ea | |
| Vibration resistance acc. to IEC/EN 60068-2-6 | | IEC 60068-2-6 Test Fc; 2–13.2 Hz/1 mm 13.2–100 Hz/0.7 g with load 100 % I_n | |
| Environmental conditions (damp heat) acc. to IEC/EN 60068-2-30 | °C/RH | 12 + 12 cycle with 55 °C/90–96 % and 25 °C/95–100 % | |
| Environmental conditions (dry heat) acc. to IEC/EN 60068-2-2 Test B | °C/RH | 16 hours 55 °C/2 hours 70 °C with damp heat 55 % | |
| Ambient temperature | °C | –25 ... +60 | |
| Storage temperature | °C | –25 ... +70 | |
| Installation | | | |
| Terminal | | | Failsafe cage or ringlug terminal |
| Connections (top/bottom) – C_u only | mm ² | | 1 ... 50 stranded 1 ... 70 flexible |
| Tightening torque | Nm in-lbs. | | 3.5 31 |
| Screwdriver | | | POZI 2 |
| Mounting | | | any |
| Mounting position | | | any |
| Supply | | any | any (taking into account the polarization) |
| Dimensions and weight | | | |
| Pole dimensions (H x L x W) | mm | | 95 x 26.5 x 82.5 |
| Pole weight | g | | 240 |

Technical data

S800PV*

Typical internal resistances and power losses at 25 °C ambient temperature (per pole)

3

| Rated current I _n [A] | Internal resistance R _i [mΩ] | | | Power loss P _v [W] | | |
|-------------------------------------|--|------|--------|----------------------------------|------|--------|
| | PV-S | PV-M | PV-M-H | PV-S | PV-M | PV-M-H |
| 10 | 15.2 | | | 1.5 | | |
| 13 | 12.1 | | | 2.0 | | |
| 16 | 12.1 | | | 3.1 | | |
| 20 | 8.7 | | | 3.5 | | |
| 25 | 6.8 | | | 4.3 | | |
| 32 | 3.1 | 1.8 | 1.8 | 3.2 | 1.8 | 1.8 |
| 40 | 2.3 | | | 3.7 | | |
| 50 | 1.7 | | | 4.3 | | |
| 63 | 1.6 | 0.9 | 0.9 | 6.4 | 3.6 | 3.6 |
| 80 | 1.0 | | | 6.4 | | |
| 100 | 0.8 | | | 8.0 | | |
| 125 | 0.6 | 0.5 | 0.6 | 9.4 | 7.8 | 6.0 |

* Detailed information is contained in our S800PV Document 2CCC413002C020x.

For the effects of temperatures not given in the above table, please get in touch with your ABB contact.

Technical data

Performance at different ambient temperatures

Derating of load capability of S800

The table refers to the product standard IEC 60947-2. These values are only valid if the mounting conditions are similar to the IEC 60947-2.

The rated value of the current of the S800 refers to a calibration temperature of 30 °C for characteristics B, C and D. For characteristics K and UCK it refers to 40 °C and the UL-version (S800U) refers to a calibration temperature of 25 °C.

Max. operating current depending on the ambient temperature of S800 with characteristic B, C, D, PV-S, UCB

| B, C, D, PV-S, UCB | Ambient temperature (°C) | | | | | | | | | | | | | | | | | | | | |
|-----------------------------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | In [A] | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
| 6 | 7.2 | 7.1 | 7.0 | 6.9 | 6.8 | 6.7 | 6.6 | 6.4 | 6.3 | 6.2 | 6.1 | 6.0 | 5.9 | 5.8 | 5.7 | 5.6 | 5.4 | 5.3 | 5.2 | 5.1 | 5.0 |
| 8 | 9.6 | 9.5 | 9.3 | 9.2 | 9.0 | 8.9 | 8.7 | 8.6 | 8.4 | 8.3 | 8.1 | 8.0 | 7.9 | 7.7 | 7.6 | 7.4 | 7.3 | 7.1 | 7.0 | 6.8 | 6.7 |
| 10 | 12.0 | 11.8 | 11.7 | 11.5 | 11.3 | 11.1 | 10.9 | 10.7 | 10.6 | 10.4 | 10.2 | 10.0 | 9.8 | 9.6 | 9.4 | 9.3 | 9.1 | 8.9 | 8.7 | 8.5 | 8.3 |
| 13 | 15.6 | 15.4 | 15.1 | 14.9 | 14.7 | 14.4 | 14.2 | 14.0 | 13.7 | 13.5 | 13.2 | 13.0 | 12.8 | 12.5 | 12.3 | 12.0 | 11.8 | 11.6 | 11.3 | 11.1 | 10.9 |
| 16 | 19.2 | 18.9 | 18.6 | 18.3 | 18.1 | 17.8 | 17.5 | 17.2 | 16.9 | 16.6 | 16.3 | 16.0 | 15.7 | 15.4 | 15.1 | 14.8 | 14.5 | 14.2 | 13.9 | 13.7 | 13.4 |
| 20 | 24.0 | 23.7 | 23.3 | 22.9 | 22.6 | 22.2 | 21.8 | 21.5 | 21.1 | 20.7 | 20.4 | 20.0 | 19.6 | 19.3 | 18.9 | 18.5 | 18.2 | 17.8 | 17.4 | 17.1 | 16.7 |
| 25 | 30.0 | 29.6 | 29.1 | 28.7 | 28.2 | 27.8 | 27.3 | 26.8 | 26.4 | 25.9 | 25.5 | 25.0 | 24.5 | 24.1 | 23.6 | 23.2 | 22.7 | 22.2 | 21.8 | 21.3 | 20.9 |
| 32 | 38.5 | 37.9 | 37.3 | 36.7 | 36.1 | 35.5 | 34.9 | 34.3 | 33.8 | 33.2 | 32.6 | 32.0 | 31.4 | 30.8 | 30.2 | 29.7 | 29.1 | 28.5 | 27.9 | 27.3 | 26.7 |
| 40 | 48.1 | 47.3 | 46.6 | 45.9 | 45.1 | 44.4 | 43.7 | 42.9 | 42.2 | 41.5 | 40.7 | 40.0 | 39.3 | 38.5 | 37.8 | 37.1 | 36.3 | 35.6 | 34.9 | 34.1 | 33.4 |
| 50 | 60.1 | 59.2 | 58.3 | 57.3 | 56.4 | 55.5 | 54.6 | 53.7 | 52.8 | 51.8 | 50.9 | 50.0 | 49.1 | 48.2 | 47.2 | 46.3 | 45.4 | 44.5 | 43.6 | 42.7 | 41.7 |
| 63 | 75.7 | 74.6 | 73.4 | 72.2 | 71.1 | 69.9 | 68.8 | 67.6 | 66.5 | 65.3 | 64.2 | 63.0 | 61.8 | 60.7 | 59.5 | 58.4 | 57.2 | 56.1 | 54.9 | 53.8 | 52.6 |
| 80 | 96.1 | 94.7 | 93.2 | 91.7 | 90.3 | 88.8 | 87.3 | 85.9 | 84.4 | 82.9 | 81.5 | 80.0 | 78.5 | 77.1 | 75.6 | 74.1 | 72.7 | 71.2 | 69.7 | 68.3 | 66.8 |
| 100 | 120.2 | 118.4 | 116.5 | 114.7 | 112.8 | 111.0 | 109.2 | 107.3 | 105.5 | 103.7 | 101.8 | 100.0 | 98.2 | 96.3 | 94.5 | 92.7 | 90.8 | 89.0 | 87.2 | 85.3 | 83.5 |
| 125 | 150.2 | 147.9 | 145.6 | 143.4 | 141.1 | 138.8 | 136.5 | 134.2 | 131.9 | 129.6 | 127.3 | 125.0 | 122.7 | 120.4 | 118.1 | 115.8 | 113.5 | 111.2 | 108.9 | 106.7 | 104.4 |

Max. operating current depending on the ambient temperature of S800 with characteristic K, UCK

| K, UCK | Ambient temperature [°C] | | | | | | | | | | | | | | | | | | | | |
|-----------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | In [A] | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
| 6 | 7.43 | 7.32 | 7.21 | 7.10 | 6.99 | 6.88 | 6.77 | 6.66 | 6.55 | 6.44 | 6.33 | 6.22 | 6.11 | 6.00 | 5.89 | 5.78 | 5.67 | 5.56 | 5.45 | 5.34 | 5.23 |
| 8 | 9.91 | 9.76 | 9.61 | 9.47 | 9.32 | 9.17 | 9.03 | 8.88 | 8.73 | 8.59 | 8.44 | 8.29 | 8.15 | 8.00 | 7.85 | 7.71 | 7.56 | 7.41 | 7.27 | 7.12 | 6.97 |
| 10 | 12.4 | 12.2 | 12.0 | 11.8 | 11.7 | 11.5 | 11.3 | 11.1 | 10.9 | 10.7 | 10.6 | 10.4 | 10.2 | 10.0 | 9.8 | 9.6 | 9.4 | 9.3 | 9.1 | 8.9 | 8.7 |
| 13 | 16.1 | 15.9 | 15.6 | 15.4 | 15.1 | 14.9 | 14.7 | 14.4 | 14.2 | 14.0 | 13.7 | 13.5 | 13.2 | 13.0 | 12.8 | 12.5 | 12.3 | 12.0 | 11.8 | 11.6 | 11.3 |
| 16 | 19.8 | 19.5 | 19.2 | 18.9 | 18.6 | 18.3 | 18.1 | 17.8 | 17.5 | 17.2 | 16.9 | 16.6 | 16.3 | 16.0 | 15.7 | 15.4 | 15.1 | 14.8 | 14.5 | 14.2 | 13.9 |
| 20 | 24.8 | 24.4 | 24.0 | 23.7 | 23.3 | 22.9 | 22.6 | 22.2 | 21.8 | 21.5 | 21.1 | 20.7 | 20.4 | 20.0 | 19.6 | 19.3 | 18.9 | 18.5 | 18.2 | 17.8 | 17.4 |
| 25 | 31.0 | 30.5 | 30.0 | 29.6 | 29.1 | 28.7 | 28.2 | 27.8 | 27.3 | 26.8 | 26.4 | 25.9 | 25.5 | 25.0 | 24.5 | 24.1 | 23.6 | 23.2 | 22.7 | 22.2 | 21.8 |
| 32 | 39.6 | 39.0 | 38.5 | 37.9 | 37.3 | 36.7 | 36.1 | 35.5 | 34.9 | 34.3 | 33.8 | 33.2 | 32.6 | 32.0 | 31.4 | 30.8 | 30.2 | 29.7 | 29.1 | 28.5 | 27.9 |
| 40 | 49.5 | 48.8 | 48.1 | 47.3 | 46.6 | 45.9 | 45.1 | 44.4 | 43.7 | 42.9 | 42.2 | 41.5 | 40.7 | 40.0 | 39.3 | 38.5 | 37.8 | 37.1 | 36.3 | 35.6 | 34.9 |
| 50 | 61.9 | 61.0 | 60.1 | 59.2 | 58.3 | 57.3 | 56.4 | 55.5 | 54.6 | 53.7 | 52.8 | 51.8 | 50.9 | 50.0 | 49.1 | 48.2 | 47.2 | 46.3 | 45.4 | 44.5 | 43.6 |
| 63 | 78.0 | 76.9 | 75.7 | 74.6 | 73.4 | 72.2 | 71.1 | 69.9 | 68.8 | 67.6 | 66.5 | 65.3 | 64.2 | 63.0 | 61.8 | 60.7 | 59.5 | 58.4 | 57.2 | 56.1 | 54.9 |
| 80 | 99.1 | 97.6 | 96.1 | 94.7 | 93.2 | 91.7 | 90.3 | 88.8 | 87.3 | 85.9 | 84.4 | 82.9 | 81.5 | 80.0 | 78.5 | 77.1 | 75.6 | 74.1 | 72.7 | 71.2 | 69.7 |
| 100 | 123.9 | 122.0 | 120.2 | 118.4 | 116.5 | 114.7 | 112.8 | 111.0 | 109.2 | 107.3 | 105.5 | 103.7 | 101.8 | 100.0 | 98.2 | 96.3 | 94.5 | 92.7 | 90.8 | 89.0 | 87.2 |
| 125 | 154.8 | 152.5 | 150.2 | 147.9 | 145.6 | 143.4 | 141.1 | 138.8 | 136.5 | 134.2 | 131.9 | 129.6 | 127.3 | 125.0 | 122.7 | 120.4 | 118.1 | 115.8 | 113.5 | 111.2 | 108.9 |

Technical data

Performance at different ambient temperatures

Max. operating current depending on the ambient temperature of S800U-K, -Z, -UCZ, -PVS5


| U-K, Z, UCZ, PVS5 | Ambient temperature [°C] | | | | | | | | | | | | | | | | | | | | |
|----------------------------|--------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | In [A] | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
| 5 | 5.9 | 5.8 | 5.7 | 5.6 | 5.6 | 5.5 | 5.4 | 5.3 | 5.2 | 5.1 | 5.0 | 4.9 | 4.8 | 4.7 | 4.6 | 4.5 | 4.4 | 4.4 | 4.3 | 4.2 | 4.1 |
| 10 | 11.8 | 11.7 | 11.5 | 11.3 | 11.1 | 10.9 | 10.7 | 10.6 | 10.4 | 10.2 | 10.0 | 9.8 | 9.6 | 9.4 | 9.3 | 9.1 | 8.9 | 8.7 | 8.5 | 8.3 | 8.2 |
| 13 | 15.4 | 15.1 | 14.9 | 14.7 | 14.4 | 14.2 | 14.0 | 13.7 | 13.5 | 13.2 | 13.0 | 12.8 | 12.5 | 12.3 | 12.0 | 11.8 | 11.6 | 11.3 | 11.1 | 10.9 | 10.6 |
| 16 | 18.9 | 18.6 | 18.3 | 18.1 | 17.8 | 17.5 | 17.2 | 16.9 | 16.6 | 16.3 | 16.0 | 15.7 | 15.4 | 15.1 | 14.8 | 14.5 | 14.2 | 13.9 | 13.7 | 13.4 | 13.1 |
| 20 | 23.7 | 23.3 | 22.9 | 22.6 | 22.2 | 21.8 | 21.5 | 21.1 | 20.7 | 20.4 | 20.0 | 19.6 | 19.3 | 18.9 | 18.5 | 18.2 | 17.8 | 17.4 | 17.1 | 16.7 | 16.3 |
| 25 | 29.6 | 29.1 | 28.7 | 28.2 | 27.8 | 27.3 | 26.8 | 26.4 | 25.9 | 25.5 | 25.0 | 24.5 | 24.1 | 23.6 | 23.2 | 22.7 | 22.2 | 21.8 | 21.3 | 20.9 | 20.4 |
| 32 | 37.9 | 37.3 | 36.7 | 36.1 | 35.5 | 34.9 | 34.3 | 33.8 | 33.2 | 32.6 | 32.0 | 31.4 | 30.8 | 30.2 | 29.7 | 29.1 | 28.5 | 27.9 | 27.3 | 26.7 | 26.1 |
| 40 | 47.3 | 46.6 | 45.9 | 45.1 | 44.4 | 43.7 | 42.9 | 42.2 | 41.5 | 40.7 | 40.0 | 39.3 | 38.5 | 37.8 | 37.1 | 36.3 | 35.6 | 34.9 | 34.1 | 33.4 | 32.7 |
| 50 | 59.2 | 58.3 | 57.3 | 56.4 | 55.5 | 54.6 | 53.7 | 52.8 | 51.8 | 50.9 | 50.0 | 49.1 | 48.2 | 47.2 | 46.3 | 45.4 | 44.5 | 43.6 | 42.7 | 41.7 | 40.8 |
| 63 | 74.6 | 73.4 | 72.2 | 71.1 | 69.9 | 68.8 | 67.6 | 66.5 | 65.3 | 64.2 | 63.0 | 61.8 | 60.7 | 59.5 | 58.4 | 57.2 | 56.1 | 54.9 | 53.8 | 52.6 | 51.4 |
| 80 | 94.7 | 93.2 | 91.7 | 90.3 | 88.8 | 87.3 | 85.9 | 84.4 | 82.9 | 81.5 | 80.0 | 78.5 | 77.1 | 75.6 | 74.1 | 72.7 | 71.2 | 69.7 | 68.3 | 66.8 | 65.3 |
| 100 | 118.4 | 116.5 | 114.7 | 112.8 | 111.0 | 109.2 | 107.3 | 105.5 | 103.7 | 101.8 | 100.0 | 98.2 | 96.3 | 94.5 | 92.7 | 90.8 | 89.0 | 87.2 | 85.3 | 83.5 | 81.7 |
| 125 | 147.9 | 145.6 | 143.4 | 141.1 | 138.8 | 136.5 | 134.2 | 131.9 | 129.6 | 127.3 | 125.0 | 122.7 | 120.4 | 118.1 | 115.8 | 113.5 | 111.2 | 108.9 | 106.7 | 104.4 | 102.1 |

Influence of mounting distances between the devices

Multiply the rated current referring to your max. occurent temperature with the factor of "influence of mounting distances"

Example: 2 x S802B-B125 at T= 35 °C with 5 mm distance

$$I_n = 120.4 \text{ A} \times 92.1 \% = 110.9 \text{ A}$$

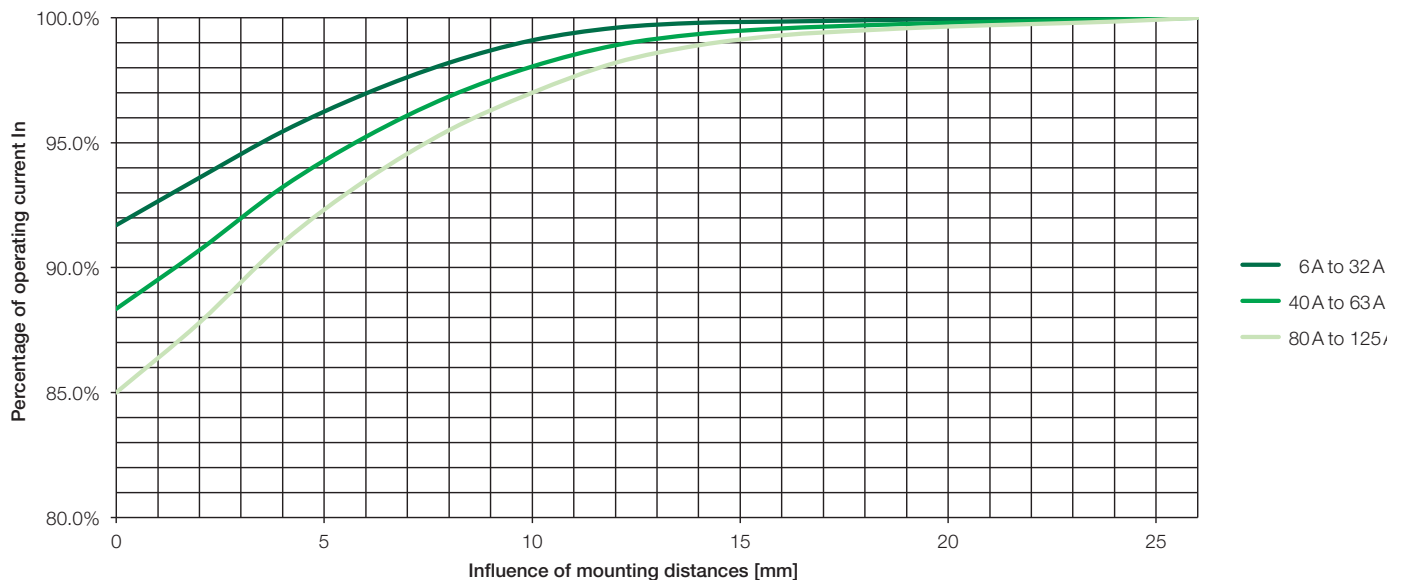

Further influencing factors, which can lead to a reduction of the maximum operating current, are:

- Shortening the cable length compared to IEC 60947-1/-2
- Reducing the cable cross section compared to IEC 60947-1/-2
- Accumulation of cables

Technical data

Accessories

Auxiliary contact S800-AUX

| | | |
|--|-----------------|---|
| Utilisation categories | | AC15 400/2A AC15 240/6A DC13 250/0.55 A DC13 125V/1.1 A DC13 60V/2A DC13 24V/4A |
| compliant to IEC 60947-5-1 | | |
| Rated values compliant to UL 489 | | 125VAC 6A 250VAC 5A 24VDC 4A 125VDC 0.3A 250VDC 0.15A |
| Conventional free air thermal current I_{th} | A | 6 |
| Minimum operational current I_{min} | mA | 3 |
| Minimum operational voltage U_{min} | V | 24 |
| Rated insulation voltage U_i | V | 690 |
| Number of contacts | | 2 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Pollution degree | | 3 |
| Standard | | IEC 60947-5-1 / UL 489 |
| Contact function | | Changeover contact |
| Connection C_u | mm ² | 1 x 2.5 2 x 1.5 14 AWG |
| Tightening torque | Nm | 1 |
| AC/DC feed | | any |
| Mounting on DIN top hat rail | | EN 60715 |
| Protection category | | IP20 |
| Permissible operating ambient temperature | °C | -25 ... +60 |
| Storage temperature | °C | -40 ... +70 |
| Mech. lifetime of device | | 6000 switching cycles |
| I_{cu} | A | 1000 |
| Vibration resistance | | IEC 60068-2-6; EN 61373 Cat.1/Class B 5 g, 20 frequency cycle 5 ... 150 ... 5 Hz at 24V AC/DC, 5 mA short-term interruption <10 ms |

Technical data

Accessories

Combined auxiliary and signal contact S800-AUX/ALT

| | | |
|--|-----------------|---|
| Utilisation categories compliant to IEC 60947-5-1 | | AC15 400/2A AC15 240/6A DC13 250/0.55A DC13 125V/1.1A DC13 60V/2A DC13 24V/4A |
| Rated values compliant to UL 489 | | 125VAC 6A 250VAC 5A 24VDC 4A 125VDC 0.3A 250VDC 0.15A |
| Conventional free air thermal current I_{th} | A | 6 |
| Minimum operational I_{min} | mA | 3 |
| Minimum operational voltage U_{min} | V | 24 |
| Rated insulation voltage U_i | A | 690 |
| Number of contacts | | 2 (1x AUX, 1x AUX/ALT) |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Pollution degree | | 3 |
| Standard | | IEC 60947-5-1 / UL 489 |
| Contact function | | Changeover contact |
| Connection C_u | mm ² | 1 x 2.5 2 x 1.5 14 AWG |
| Tightening torque | Nm | 1 |
| AC/DC feed | | any |
| Mounting on DIN top hat rail | | EN 60715 |
| Protection category | | IP20 |
| Permissible operating ambient temperature | °C | -25 ... +60 |
| Storage temperature | °C | -40 ... +70 |
| Mech. lifetime of device | | 6000 switching cycles |
| I_{cu} mit S450E | A | 1000 |
| Vibration resistance | | IEC 60068-2-6; EN 61373 Cat.1/Class B 5 g, 20 frequency cycle 5 ... 150 ... 5 Hz at 24V AC/DC, 5 mA short-term interruption <10 ms |

S800-RSU-H IEC version

S800W-RSU World version

Remote Switching Units for High Performance MCB

| | | |
|--------------------------------|----|-----------------------|
| Operating Voltage | | 24VDC |
| Current Consumption I_{rms} | A | 2.5 |
| Stand-by Current | mA | < 50 |
| Switching Time OFF-ON | ms | < 500 |
| Switching Time ON-OFF | ms | < 250 |
| Ambient Operation Temperature | °C | -25 ... 70 |
| Switching Cycles over Lifetime | | 10.000 |
| Standard | | IEC 60947-2 Annex N |
| Protection | | IP20 |
| Weight | g | 300 |
| Connection | | 10 pole Micro Fit 3.0 |

Technical data

Accessories

Short-circuit current limiter S803S-SCL

| | | |
|--|-----------------|--|
| Rated operational current I_e | A | 32, 63, 125 |
| Pole | | 3 |
| Rated operational voltage U_e (AC) 50/60 Hz | V | 400/690 |
| Rated insulation voltage U_i | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 8 |
| Rated ultimate short-circuit breaking capacity I_{cu} compliant to IEC 60947-2 | | |
| 400 VAC | kA | 100 |
| 440 VAC | kA | 100 |
| 690 VAC | kA | 50 |
| Rated service short-circuit breaking capacity I_{cs} compliant to IEC 60947-2 | | 100% I_{cu} |
| Rated frequency | Hz | 50/60 |
| Mounting position | | any |
| Disconnecter properties compliant to IEC 60947-2 | | yes |
| Standard | | IEC 60947-2 |
| Connections C_u (32 A) | mm ² | 1...25 strand 1...35 cable |
| Connections C_u (63, 125 A) | mm ² | 6...50 strand 6...70 cable |
| Tightening torque | Nm | 3.5 |
| Feed | | any |
| Mounting on DIN top hat rail | | EN 60715 |
| Permissible operating ambient temperature | °C | -25 ... +60 |
| Storage temperature | °C | -40 ... +70 |
| Protection category | | IP20 IP40 (actuating end only) |
| Classification compliant to NF-16-101, NF16-102 | | I3, F2 |
| Vibration resistance | | IEC 60068-2-27; IEC 60068-2; EN 61373 Cat.1/Class B |

For permitted combinations, visit: <http://www.abb.com/product>

Low voltage products/installation devices/high performance circuit breakers/software

| Rated current I_n [A] | Internal resistance R_i [mΩ] | Power loss P_v [W] |
|----------------------------|-----------------------------------|-------------------------|
| 32 | 1.7 | 1.7 |
| 63 | 1.0 | 4.0 |
| 125 | 0.6 | 9.4 |

Technical data


Accessories

Self-resetting short-circuit current limiter

| | | | S800S-SCL-SR | S803W-SCL-SR |
|--|-----------------|---|--|---|
| Rated operational current I_e | A | | 32, 63, 100 | |
| Pole | | | 1, 2, 3 | 3 |
| Rated operational voltage U_e | | | | |
| (AC) according to IEC 60947-2 | 50/60 Hz | V | 400/690 | 690 |
| (AC) according to UL 508 | 50/60 Hz | V | | 600 |
| Rated insulation voltage U_i | V | | 690 | |
| Rated impulse withstand voltage U_{imp} | kV | | 8 | |
| Rated ultimate short-circuit breaking capacity | | | | |
| $I_{cu} = I_{cs}$ according to IEC 60947-2 * | | | | |
| (AC) 50/60 Hz 240/415V | kA | | 100 | |
| (AC) 50/60 Hz 254/440V | kA | | 100 | |
| (AC) 50/60 Hz 289/500V | kA | | 65 | |
| (AC) 50/60 Hz 400/690V | kA | | 50 | |
| Short-circuit rating according to UL 508 * | | | | |
| (AC) 50/60 Hz 480V | kA | | 65 | |
| (AC) 50/60 Hz 600V | kA | | 65 | |
| *) Valid only for approved combinations Please have a look to separate coordination tables on pages 3/24 and 3/25 | | | | |
| Rated frequency | Hz | | 50/60 | |
| Mounting position | | | any | |
| Connections C_u | | | | |
| | mm ² | | 1 ... 50 rigid (solid/stranded) | |
| | mm ² | | 1 ... 70 flexible | |
| | | | | 14-1 AWG |
| Tightening torque | | | | |
| | Nm | | 3.5 | |
| | in. lbs. | | | 31 |
| Feeding | | | optional | |
| Mouting on DIN top hat rail | | | EN 60715 | |
| Ambient air temperature | °C | | -40 ... +70 | |
| Storage temperature | °C | | -40 ... +85 | |
| Degree of protection | | | IP20 | |
| Classification acc. to NF F 16-101, NF F 16-102 | | | I3, F2 | |
| Damp Heat | | | IEC 60068-2-30, 55 °C / 95 % r.h. | |
| Vibration | | | IEC 60068-2-6, 5-10 Hz / 3 mm and 10-500 Hz / 2 g at 0.5 x I_e | |
| Random Vibration | | | IEC 60068-2-64, 5-500 Hz / 2 g at 0.5 x I_e | |
| Resistance to climatic conditions | | | IEC 60068-2-1 / -2-2 / -2-30 | |
| Standard | | | IEC 60947-2 IEC 60947-4-1 | IEC 60947-2 IEC 60947-4-1 UL 508, CSA 22.2 No. 14 |

Technical data

S803HV-SCL-SR



S803HV-SCL-SR in combination with S803HV-K

General data

| | | |
|---|----|-------------|
| Standard | | IEC 60947-2 |
| Poles | | 3 |
| Rated frequency f | Hz | 50/60 |
| Data acc. to IEC 60947-2 | | |
| Rated operational voltage U_e | V | AC 580/1000 |
| Rated operational current I_n | A | 32, 63, 100 |
| Rated ultimate short-circuit breaking capacity I_{cu} | kA | 15 |
| Rated service short-circuit capacity I_{cs} | kA | 10 |
| Rated insulation voltage U_i | V | AC 1000 |
| Rated impulse withstand voltage U_{imp} | kV | 8 |

Mechanical data

| | | |
|--|----|--|
| Housing | | Material group I, RAL 7035 |
| Toggle | | black, lockable |
| Protection degree acc. to IEC / EN 60529 | | IP20; IP40 (actuating side only) |
| Classification acc. to NF F16-101, NF F 16-102 | | I3, F2 |
| Classification acc. to IEC 61373 (shock and vibration) | | Cat. 1, Class B |
| Shock resistance acc. to IEC / EN 60068-2-27 | | Test Ea: 5 g / 30 ms |
| Vibration resistance acc. to IEC / EN 60068-2-6 | | Test Fc: 2–13.2 Hz / 1 mm 13.2–100 Hz / 0.7 g with load 100 % x I_e |
| Environmental conditions (damp heat) acc. to IEC / EN 60068-2-30 | | 12+12 cycle with 55 °C / 90–96 % RH and 25 °C / 95–100 % RH |
| Environmental conditions (dry heat) acc. to IEC / EN 60068-2-2 | | 16 hours 55 °C / 2 hours 70 °C / 55 % RH |
| Ambient temperature | °C | –25 ... +60 |
| Storage temperature | °C | –40 ... +70 |

Installation

| | | |
|-----------------------------------|-----------------|--|
| Terminal | | Failsafe cage terminal |
| Connection (top/bottom) – Cu only | mm ² | 1 ... 50 solid / stranded 1 ... 70 flexible |
| Tightening torque | Nm | 3.5 |
| Screwdriver | | POZI 2 |
| Mounting | | EN 60715 |
| Mounting position | | any |
| Supply side | | any |

Dimension and weight

| | | |
|----------------------------|----|-------------------|
| Pole dimension (H x L x W) | mm | 142 x 76.5 x 26.5 |
| Pole weight | kg | 0.25 |

Internal resistance at 25 °C ambient temperature and nominal power losses

| Rated operational current I_n [A] | Internal resistance R_i [mΩ] | Power losses P_m [W] |
|--|-----------------------------------|---------------------------|
| 32 | 2.8 | 3.6 |
| 63 | 1.3 | 5.7 |
| 100 | 0.7 | 7.8 |

Technical data

Accessories

Internal resistance at 25°C ambient temperature and nominal power losses


| Rated operational current I_n [A] | Internal resistance R_i [mΩ] | Power losses P_{vn} [W] |
|--|-----------------------------------|------------------------------|
| 32 | 2.8 | 3.6 |
| 63 | 1.3 | 5.7 |
| 100 | 0.7 | 7.8 |

3

Influence of ambient temperature – single mounted devices

| Rated operational current I_n [A] | 10°C | 15°C | 20°C | 25°C | 30°C | 35°C | 40°C | 45°C | 50°C | 55°C | 60°C | 65°C | 70°C |
|-------------------------------------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|
| 32 | 38.2 | 37.2 | 35.8 | 35.2 | 34.2 | 33.3 | 32 | 30.7 | 29.8 | 28.8 | 27.8 | 26.5 | 25.1 |
| 63 | 75.3 | 73.2 | 70.6 | 69.3 | 67.4 | 65.5 | 63 | 60.5 | 58.6 | 56.7 | 54.8 | 52.3 | 49.8 |
| 100 | 119.5 | 116.2 | 112 | 110 | 107 | 104 | 100 | 96 | 93 | 90 | 87 | 84 | 80 |

Maximum load

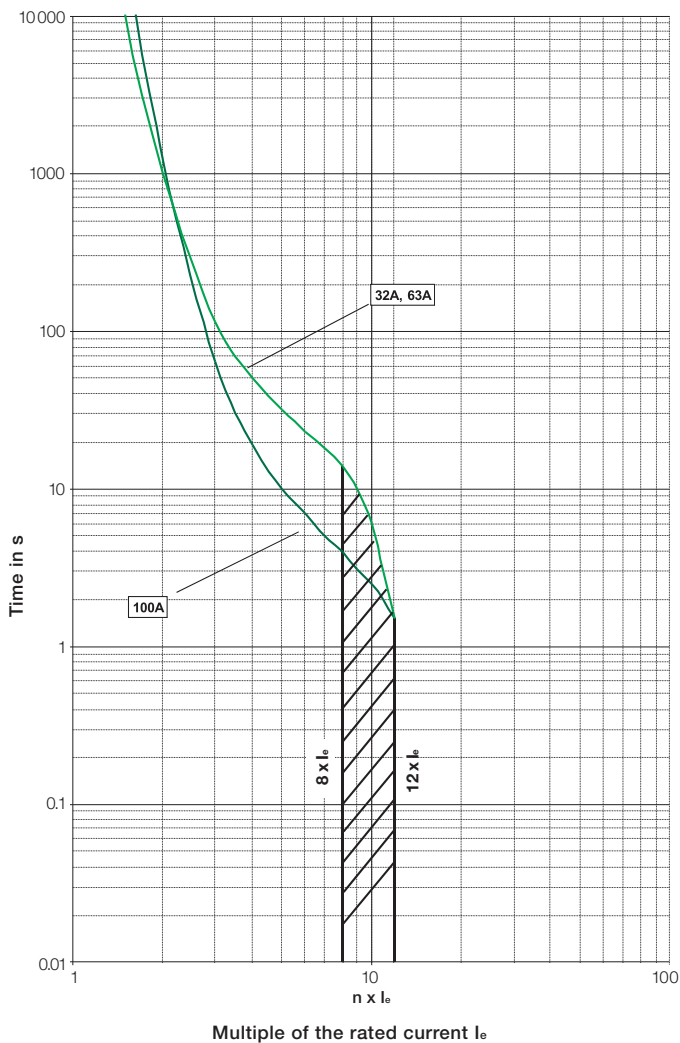

Installation requirements

The total sum of the rated currents of all downstream motor starters or circuit breakers shall not exceed the rated current of the S800-SCL-SR (valid also for HV version). Furthermore the sum of all load currents including inrush currents shall not exceed the maximum permissible load of the S800-SCL-SR (valid also for HV version).

Approved combinations

S800-SCL-SR/S803S-SCL with S800 and motor starters

A new web tool SOC - Selected Optimized Coordination is now available at http://applications.it.abb.com/SOC_SNB and can be used to find all the available combinations between S800 portfolio and other ABB devices:

- Motor starting and protection
- Selectivity among protection devices
- Back-up among protection devices
- Protection of other equipments like switch-disconnectors

Approved combinations with high performance MCB S800

| Downstream devices | Upstream devices | | | | | |
|----------------------------------|---|----|-----|------------------------------------|----|-----|
| | S800S-SCL-SR/S803W-SCL-SR Self resetting short-circuit limiter | | | S803S-SCL Short-circuit limiter | | |
| Rated current I _e [A] | 32 | 63 | 100 | 32 | 63 | 125 |
| S800S Characteristic B | | | | | | |
| 6 | ■ | | | | | |
| 8 | ■ | | | | | |
| 10 | ■ | ■ | ■ | ■ | | |
| 13 | ■ | ■ | ■ | ■ | | |
| 16 | ■ | ■ | ■ | ■ | | |
| 20 | ■ | ■ | ■ | ■ | | |
| 25 | ■ | ■ | ■ | ■ | | |
| 32 | ■ | ■ | ■ | ■ | ■ | |
| 40 | | ■ | ■ | | ■ | |
| 50 | | ■ | ■ | | ■ | |
| 63 | | ■ | ■ | | ■ | ■ |
| 80 | | | ■ | | | ■ |
| 100 | | | ■ | | | ■ |
| 125 | | | | | | ■ |
| S800S Characteristic C | | | | | | |
| 6 | ■ | | | | | |
| 8 | ■ | | | | | |
| 10 | ■ | ■ | ■ | ■ | | |
| 13 | ■ | ■ | ■ | ■ | | |
| 16 | ■ | ■ | ■ | ■ | | |
| 20 | ■ | ■ | ■ | ■ | | |
| 25 | ■ | ■ | ■ | ■ | | |
| 32 | | ■ | ■ | ■ | ■ | |
| 40 | | ■ | ■ | | ■ | |
| 50 | | ■ | ■ | | ■ | |
| 63 | | | ■ | | ■ | ■ |
| 80 | | | ■ | | | ■ |
| 100 | | | | | | ■ |
| 125 | | | | | | ■ |
| S800S Characteristic D/K | | | | | | |
| 6 | ■ | | | | | |
| 8 | ■ | | | | | |
| 10 | ■ | ■ | ■ | ■ | | |
| 13 | ■ | ■ | ■ | ■ | | |
| 16 | ■ | ■ | ■ | ■ | | |
| 20 | | ■ | ■ | ■ | | |
| 25 | | ■ | ■ | ■ | | |
| 32 | | ■ | ■ | ■ | ■ | |
| 40 | | ■ | ■ | | ■ | |
| 50 | | | ■ | | ■ | |
| 63 | | | ■ | | ■ | ■ |
| 80 | | | | | | ■ |
| 100 | | | | | | ■ |
| 125 | | | | | | ■ |

Approved combinations

S800-SCL-SR/S803S-SCL with S800 and motor starters

Approved combinations with motor starter/S800S-KM

| Downstream devices | Upstream devices | | | | | |
|----------------------------------|---|----|-----|------------------------------------|----|-----|
| | S800S-SCL-SR/S803W-SCL-SR Self resetting short-circuit limiter | | | S803S-SCL Short-circuit limiter | | |
| Rated current I _e [A] | 32 | 63 | 100 | 32 | 63 | 125 |
| MS/MO325 | | | | | | |
| 0.1–2.5 | ■ | ■ | ■ | | | |
| 4 | ■ | ■ | ■ | | | |
| 6.3 | ■ | ■ | ■ | | | |
| 9 | ■ | ■ | ■ | ■ | ■ | |
| 12.5 | ■ | ■ | ■ | ■ | ■ | |
| 16 | ■ | ■ | ■ | ■ | ■ | |
| 20 | | ■ | ■ | ■ | ■ | |
| 25 | | ■ | ■ | ■ | ■ | |
| MS/MO132 | | | | | | |
| 0.1–2.5 | ■ | ■ | | | | |
| 4 | ■ | ■ | | | | |
| 6.3 | ■ | ■ | ■ | | | |
| 10 | ■ | ■ | ■ | ■ | ■ | |
| 16 | ■ | ■ | ■ | ■ | ■ | |
| 20 | | ■ | ■ | ■ | ■ | |
| 25 | | ■ | ■ | ■ | ■ | |
| 32 | | ■ | ■ | ■ | ■ | |
| MS132 | | | | | | |
| 0.1–2.5 | ■ | ■ | | | | |
| 4 | ■ | ■ | | | | |
| 6.3 | ■ | ■ | ■ | | | |
| 10 | ■ | ■ | ■ | ■ | ■ | |
| 12 | ■ | ■ | ■ | ■ | ■ | |
| 16 | | ■ | ■ | ■ | ■ | |
| 20 | | ■ | ■ | ■ | ■ | |
| 25 | | ■ | ■ | ■ | ■ | |
| S800S-KM | | | | | | |
| 20 | | ■ | ■ | ■ | | |
| 25 | | ■ | ■ | ■ | | |
| 32 | | ■ | ■ | ■ | ■ | |
| 40 | | ■ | ■ | | ■ | |
| 50 | | | ■ | | ■ | |
| 63 | | | | | ■ | ■ |
| 80 | | | | | | ■ |

* Motor starter combinations acc. to IEC 60947-4-1

■ Applies for all voltages according to the table below

Approved combinations S803HV-SCL-SR with S800

Approved combinations with S803HV-K

| Downstream devices | Upstream devices S803HV-SCL-SR Self resetting short-circuit limiter | | |
|--------------------------------|--|----|-----|
| | 32 | 63 | 100 |
| S800HV Characteristic K | | | |
| 6 | ■ | | |
| 8 | ■ | | |
| 10 | ■ | | |
| 13 | ■ | | |
| 16 | | ■ | ■ |
| 20 | | ■ | ■ |
| 25 | | ■ | ■ |
| 32 | | ■ | ■ |
| 40 | | ■ | ■ |
| 50 | | | ■ |
| 63 | | | ■ |
| 80 | | | |
| 100 | | | |
| 125 | | | |

3

Applies for all voltages according to the table below

| | S800S-SCL-SR | S803W-SCL-SR | S803S-SCL | S803HV-SCL-SR |
|---|--------------|--------------|-----------|--|
| Rated ultimate short-circuit breaking capacity | | | | |
| $I_{cu} = I_{cs}$ according to IEC 60947-2 | | | | |
| (AC) 50/60 Hz 240/415 V | kA 100 | 100 | | |
| (AC) 50/60 Hz 254/440 V | kA 100 | 100 | 100 | |
| (AC) 50/60 Hz 277/480 V | kA 65 | 65 | | |
| (AC) 50/60 Hz 289/500 V | kA 65 | 65 | | |
| (AC) 50/60 Hz 346/600 V | kA 65 | 65 | | |
| (AC) 50/60 Hz 400/690 V | kA 50 | 50 | 50 | |
| (AC) 50/60 Hz 580/1000 V | kA | | | $I_{cu} = 15 \text{ kA}$ $I_{cs} = 10 \text{ kA}$ |
| Short-circuit rating according to UL 508, CSA 22.2 | | | | |
| (AC) 50/60 Hz 480 V | kA | 65 | | |
| (AC) 50/60 Hz 600 V | kA | 65 | | |

Technical data

Accessories

Shunt release S800-SOR

| | | S800-SOR12 | S800-SOR24 | S800-SOR130 | S800-SOR250 | S800-SOR400 |
|---|-----------------|------------|------------|---|---------------------------|--------------|
| Rated operational voltage U_e | VAC/DC | 12 | 24 | 48 ... 130 | 110...250 | 220 ... 400 |
| Operating range | % U_e | | | 70 ... 110 | | |
| Rated insulation voltage U_i | V | | | 690 | | |
| Coil pull in consumption | W/VA | 15.5 | 16.6/17* | 41.9 ... 307.3 42 ... 310* | 23 ... 119 20 ... 105* | 45 ... 148.1 |
| Rated frequency | Hz | | | DC; 50/60 | | |
| Pollution degree | | | | 3 | | |
| Standard | | | | IEC 60947-2/UL 489 | | |
| Connection C_u | mm ² | | | 1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable | | |
| Tightening torque | Nm | | | 3.5 | | |
| AC/DC supply | | | | any | | |
| Mounting on DIN top hat rail | | | | EN 60715 | | |
| Protection category | | | | IP20 IP40 (actuating end only) | | |
| Permissible operating ambient temperature | °C | | | -25 ... +60 | | |
| Storage temperature | °C | | | -40 ... +70 | | |
| Vibration resistance | | | | IEC 60068-2-6; EN 61373 Cat.1/Class B | | |

3

Technical data

Accessories

Undervoltage release S800-UVR

| | | S800-UVR36 | S800-UVR60 | S800-UVR130 | S800-UVR250 |
|---|-----------------|--------------------|--------------------|---|--------------------|
| Rated operational voltage U_e | VAC/DC | 24 ... 36 | 48 ... 60 | 110 ... 130 | 220 ... 250 |
| Operating range | | | | | |
| open | % U_e | | | 35 ... 70 | |
| closed | % U_e | | | 85 | |
| Rated insulation voltage U_i | V | | | 690 | |
| Power loss of coil when attracted | W/VA | 1.11 ... 1.14/1.2* | 1.14 ... 1.25/1.3* | 1.3 ... 1.41/1.4* | 1.71 ... 1.91/1.9* |
| Rated frequency | Hz | | | DC; 50/60 | |
| Pollution degree | | | | 3 | |
| Standard | | | | IEC 60947-2 / UL 489 | |
| Connection C_u | mm ² | | | 1 ... 25 (14-2 AWG) strand 1 ... 35 (14-3 AWG) cable | |
| Tightening torque | Nm | | | 3.5 | |
| AC/DC supply | | | | any | |
| Mounting on DIN top hat rail | | | | EN 60715 | |
| Protection category | | | | IP20 IP40 (actuating end only) | |
| Permissible operating ambient temperature | °C | | | -25 ... +60 | |
| Storage temperature | °C | | | -40 ... +70 | |
| Vibration resistance | | | | IEC 60068-2-6; EN 61373 Cat.1/Class B | |

* compliant to UL 489.

Busbar S803-BB250/S804-BB250

| | | |
|---|-----------------|---|
| Max. rated current I_n | | |
| Side feed | A | 125 |
| Middle feed | A | 250 |
| Conditional rated short-circuit current | kA eff | 100 mit T_{max} connected upstream |
| Poles | | 3/4 |
| Rated operational voltage U_e | | |
| (AC) 50/60 Hz | V | 400/690 |
| Rated insulation voltage U_i | V | 690 |
| Rated impulse withstand voltage U_{imp} | kV | 8 |
| Rated frequency | Hz | 50 |
| Standard | | EN/IEC 60439-2 |
| Material of rails | | E-Cu 58 half-standard, rolled F25 |
| Material of insulation profile | | Material group I; UL94 V-0 |
| Material of end caps | | Material group I; UL94 V-0 Free of halogen and phosphate |
| Busbar cross sections | mm ² | 60 |
| Overvoltage category | | III |
| Pollution degree | | 2 |

Technical data

Accessories

3

Feed block S803-BBPC120/S804-BBPC120

| | | |
|---------------------------------|-----------------|---|
| Max. rated current I_n | A | 250 |
| Poles | | 3/4 |
| Rated operational voltage U_e | V | 400/690 |
| Rated frequency | Hz | 50 |
| Standard | | EN/IEC 60439-2 |
| Material of terminals | | Material group I |
| Housing material | | Material group I; UL94 V-0 Free of halogen and phosphate |
| Tightening torque | | |
| on feed side | Nm | 19 |
| on busbar side | Nm | 3 |
| Connection cross-section | mm ² | 1.6 ... 120 |
| Pollution degree | | 2 |

Pole connector S802-LINK125

| | | |
|--------------------------------|----------|---------|
| Rated insulation voltage U_i | V | DC 1200 |
| Protection category | Nm | 3.5 |
| Tightening torque | in. lbs. | 31 |

Max. rated current as a function of ambient temperature

Combination S800PV-S with S802-LINK50 / -LINK125 (devices mounted separately)

| I_e [A] | 10° C | 15° C | 20° C | 25° C | 30° C | 35° C | 40° C | 45° C | 50° C | 55° C | 60° C |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 10 | 11.2 | 11 | 10.7 | 10.4 | 10 | 9.6 | 9.3 | 9 | 8.7 | 8.4 | 8 |
| 13 | 14.6 | 14.3 | 13.9 | 13.5 | 13 | 12.5 | 12.1 | 11.7 | 11.3 | 10.9 | 10.4 |
| 16 | 17.9 | 17.6 | 17.1 | 16.6 | 16 | 15.4 | 14.9 | 14.4 | 13.9 | 13.4 | 12.8 |
| 20 | 22.4 | 22 | 21.4 | 20.8 | 20 | 19.2 | 18.6 | 18 | 17.4 | 16.8 | 16 |
| 25 | 28 | 27.5 | 26.8 | 26 | 25 | 24 | 23.3 | 22.5 | 21.8 | 21 | 20 |
| 32 | 35.8 | 35.2 | 34.2 | 33.3 | 32 | 30.7 | 29.8 | 28.8 | 27.8 | 26.9 | 25.6 |
| 40 | 44.8 | 44 | 42.8 | 41.6 | 40 | 38.4 | 37.2 | 36 | 34.8 | 33.6 | 32 |
| 50 | 56 | 55 | 53.5 | 52 | 50 | 48 | 46.5 | 45 | 45 | 43 | 40 |
| 63 | 67.8 | 66.5 | 65.3 | 64.2 | 63.0 | 60.5 | 58.1 | 55.7 | 53.5 | 51.4 | 49.3 |
| 80 | 86.0 | 84.5 | 83.0 | 81.5 | 80.0 | 76.8 | 73.7 | 70.8 | 67.9 | 65.2 | 62.6 |
| 100 | 107.5 | 105.6 | 103.7 | 101.8 | 100.0 | 96.0 | 92.2 | 88.5 | 84.9 | 81.5 | 78.3 |
| 125 | 134.4 | 132.0 | 129.6 | 127.3 | 125.0 | 116.3 | 108.1 | 100.5 | 93.5 | 87.0 | 80.9 |

Combination S800PV-M with S802-LINK50 / -LINK125 (devices mounted separately)

| I_e [A] | 10° C | 15° C | 20° C | 25° C | 30° C | 35° C | 40° C | 45° C | 50° C | 55° C | 60° C |
|-----------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 | 32 |
| 63 | 63 | 63 | 63 | 63 | 63 | 63 | 63 | 63 | 63 | 63 | 63 |
| 125 | 125 | 125 | 125 | 125 | 125 | 125 | 110 | 110 | 100 | 100 | 100 |

These values are valid for the combination with S802-LINK50

The tables are based on measurements using cable as stated in IEC 60947-2. Any derivation from these cable diameters and lengths might lead to higher temperatures. Therefore ABB recommends to perform temperature measurements to verify the real maximum temperature in the application.

CMS sensor 18 mm

| Sensor type | | CMS-100xx | CMS-101xx | CMS-102xx |
|-------------------------------------|------|----------------------|----------------------|----------------------|
| Measurement range | A | 80 | 40 | 20 |
| Measurement values | | TRMS, AC 50/60Hz, DC | TRMS, AC 50/60Hz, DC | TRMS, AC 50/60Hz, DC |
| Crest factor of disorted wave forms | | ≤ 1.5 | ≤ 3 | ≤ 6 |
| AC Accuracy (TA = +25 °C)* | | ≤ 0.5 % | ≤ 0.5 % | ≤ 0.5 % |
| AC Temperature coefficient* | | ≤ 0.036 % | ≤ 0.036 % | ≤ 0.036 % |
| DC Accuracy (TA = +25 °C)* | | ≤ 0.7 % | ≤ 1.0 % | ≤ 1.7 % |
| DC Temperature coefficient* | | ≤ 0.047 % | ≤ 0.059 % | ≤ 0.084 % |
| Resolution | A | 0.01 | 0.01 | 0.01 |
| Sampling rate internal | Hz | 5000 | 5000 | 5000 |
| Settling time (±1 %) | sec | typ. 0.25 | typ. 0.25 | typ. 0.25 |
| Cable feed through | mm | 10 | 10 | 10 |
| Insulation Voltage | V | 690 VAC/1500 VDC | 690 VAC/1500 VDC | 690 VAC/1500 VDC |
| Operating temperature | [°C] | -25 ... +70 | -25 ... +70 | -25 ... +70 |
| Storage temperature | [°C] | -40 ... +85 | -40 ... +85 | -40 ... +85 |
| Standarts | | DIN EN 61010-1 | DIN EN 61010-1 | DIN EN 61010-1 |
| Overall dimensions | | | | |
| CMS-100PS series | mm | 17.4 x 41.0 x 26.5 | 17.4 x 41.0 x 26.5 | 17.4 x 41.0 x 26.5 |
| CMS-100S8 series | mm | 26.5 x 45.5 x 31.8 | 26.5 x 45.5 x 31.8 | 26.5 x 45.5 x 31.8 |
| CMS-100DR series | mm | 17.4 x 51.5 x 43.2 | 17.4 x 51.5 x 43.2 | 17.4 x 51.5 x 43.2 |
| CMS-100CA series | mm | 17.4 x 41.0 x 29.0 | 17.4 x 41.0 x 29.0 | 17.4 x 41.0 x 29.0 |

CMS sensor 25 mm

| Sensor type | | CMS-200xx | CMS-201xx | CMS-202xx |
|-------------------------------------|------|----------------------|----------------------|----------------------|
| Measurement range | A | 160 | 80 | 40 |
| Measurement values | | TRMS, AC 50/60Hz, DC | TRMS, AC 50/60Hz, DC | TRMS, AC 50/60Hz, DC |
| Crest factor of disorted wave forms | | ≤ 1.5 | ≤ 3 | ≤ 6 |
| AC Accuracy (TA = +25 °C)* | | ≤ 0.5 % | ≤ 0.5 % | ≤ 0.5 % |
| AC Temperature coefficient* | | ≤ 0.036 % | ≤ 0.036 % | ≤ 0.036 % |
| DC Accuracy (TA = +25 °C)* | | ≤ 0.7 % | ≤ 1.0 % | ≤ 1.7 % |
| DC Temperature coefficient* | | ≤ 0.047 % | ≤ 0.059 % | ≤ 0.084 % |
| Resolution | A | 0.01 | 0.01 | 0.01 |
| Sampling rate internal | Hz | 5000 | 5000 | 5000 |
| Settling time (±1 %) | sec | typ. 0.25 | typ. 0.25 | typ. 0.25 |
| Cable feed through | mm | 15 | 15 | 15 |
| Insulation Voltage | V | 690 VAC/1500 VDC | 690 VAC/1500 VDC | 690 VAC/1500 VDC |
| Operating temperature | [°C] | -25 ... +70 | -25 ... +70 | -25 ... +70 |
| Storage temperature | [°C] | -40 ... +85 | -40 ... +85 | -40 ... +85 |
| Standarts | | DIN EN 61010-1 | DIN EN 61010-1 | DIN EN 61010-1 |
| Overall dimensions | | | | |
| CMS-200S8 series | mm | 26.5 x 43.0 x 38.5 | 26.5 x 43.0 x 38.5 | 26.5 x 43.0 x 38.5 |
| CMS-200DR series | mm | 25.4 x 43.0 x 43.2 | 25.4 x 43.0 x 43.2 | 25.4 x 43.0 x 43.2 |
| CMS-200CA series | mm | 25.4 x 43.0 x 35.7 | 25.4 x 43.0 x 35.7 | 25.4 x 43.0 x 35.7 |

* of full range

Technical data

Accessories

3

CMS Control Unit

| | | CMS-100xx |
|----------------------|--------|--|
| Supply voltage | [VDC] | 24 (±10%) |
| Power consumption | [W] | max. 24W (with 64 sensors) |
| Interface | | RS485 2-wire |
| Protocol | | Modbus RTU |
| Data rate | [Baud] | 2400 ... 115200 |
| Data refresh time | | ≤1 sec for 64 sensors' results |
| Insulation Voltage | [V] | 400VAC |
| Screw-type terminals | | 0.5 ... 2.5 mm ² , max 0.6Nm |
| Mounting | | DIN-rail 35 mm acc. DIN50022 or SMISLINE TP busbar system |
| Dimension | [mm] | 71.8 x 87.0 x 64.9 (4 DIN modules) |

General Data – Sensors & Control Unit

| | | |
|-----------------------|------|----------------|
| Operating temperature | [°C] | -25 ... +70 |
| Operating temperature | [°C] | -40 ... +85 |
| Standards | | DIN EN 61010-1 |

DDA-800 residual current device

| | | DDA800AC | DDA800A | DDA800AS | DDA800A AP-R |
|--|-----------------|-----------|----------------|--|---------------------------|
| Standard | | | | IEC 60947-2 | |
| Sensitivity | | AC | A | A (selective) | A (with short-term delay) |
| Rated current | A | | | 100 | |
| Number of poles | | | | 2P; 3P; 4P | |
| Rated insulation voltage U_i | V | | | 690 | |
| Rated operational voltage U_e | V | | | 230/400; 240/415; 400/690 | |
| Max. Rated operational voltage U_b max. | V | | | 690 | |
| Min. Rated operational voltage U_b min. | V | | | 195 | |
| Rated ultimate short-circuit breaking capacity I_{cu} compliant to IEC 60947-2 | | | | Depends on ultimate breaking capacity of MCB's | |
| Rated ultimate short-circuit breaking capacity $I_{\Delta m}$ with S800N | kA | | | Depends on ultimate breaking capacity of MCB's | |
| Rated ultimate short-circuit breaking capacity $I_{\Delta m}$ with S800S | kA | | | Depends on ultimate breaking capacity of MCB's | |
| Rated impulse withstand voltage U_{imp} Impulse (1.2/50) | kV | | | 6 | |
| Rated impulse withstand voltage U_{imp} (50...60Hz) x 1min | kV | | | 2.5 | |
| Max. operating voltage of test circuit | V | | | 690 | |
| Min. operating voltage of test circuit | V | | | 195 | |
| Electrical strength compliant to VDE | A | | 250 | 5000 | 3000 |
| Rated frequency | Hz | | | 50/60 | |
| Rated residual operating current $I_{\Delta n}$ | A | 0.03; 0.3 | 0.03; 0.3; 0.5 | 0.3; 1 | 0.03 |
| Switch lever | | | | blue, can only be switched in OFF position | |
| Protection category, housing | | | | IP4X (without terminal area) | |
| Protection category, terminal | | | | IP2X | |
| Permissible operating ambient temperature | °C | | | -25 ... +60 | |
| Permissible storage temperature | °C | | | -40 ... +70 | |
| Strand connections | mm ² | | | 6 ... 50 | |
| Cable connections | mm ² | | | 6 ... 70 | |
| Tightening torque | Nm | | | 3.5 | |
| Fixed on mounting rail | | | | EN 60715 | |



Technical data

Accessories

DS-800 RCBO

| | | DS800S A | DS800N A | DS800S AS | DS800N AS | DS800S AP-R | DS800N AP-R |
|--|-----------------|--|----------|---------------|-----------|---------------------------|-------------|
| Standard | | IEC 60947-2 | | | | | |
| Sensitivity | | A | | A (selective) | | A (with short-term delay) | |
| Rated current | A | 125 | | | | | |
| Number of poles | | 2P; 3P; 4P | | 2P; 4P | | 2P; 3P; 4P | |
| Rated insulation voltage U_i | V | 690 | | | | | |
| Rated operational voltage U_e | V | 230/400; 240/415; 400/690 | | | | | |
| Max. rated operational voltage U_b max. | V | 690 | | | | | |
| Min. rated operational voltage U_b min. | V | 195 | | | | | |
| Rated ultimate short-circuit breaking capacity I_{cu} compliant to IEC 60947-2 | | | | | | | |
| (AC) 50/60 Hz 240/450V | kA | 50 | 36 | 50 | 36 | 50 | 36 |
| (AC) 50/60 Hz 254/440V | kA | 30 | 20 | 30 | 20 | 30 | 20 |
| (AC) 50/60 Hz 289/500V | kA | 10 | 10 | 10 | 10 | 10 | 10 |
| (AC) 50/60 Hz 400/690V | kA | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 | 4.5 |
| Rated service short-circuit breaking capacity I_{cs} compliant to IEC 60947-2 | | | | | | | |
| (AC) 50/60 Hz 240/450V | kA | 40 | 30 | 40 | 30 | 40 | 30 |
| (AC) 50/60 Hz 254/440V | kA | 15 | 10 | 15 | 10 | 15 | 10 |
| (AC) 50/60 Hz 289/500V | kA | 5 | 5 | 5 | 5 | 5 | 5 |
| (AC) 50/60 Hz 400/690V | kA | 3 | 3 | 3 | 3 | 3 | 3 |
| Rated impulse withstand voltage U_{imp} | kV | 6 | | | | | |
| Impulse (1.2/50) | | | | | | | |
| Rated impulse withstand voltage U_{imp} | kV | 2.5 | | | | | |
| (50...60 Hz) x 1 min | | | | | | | |
| Max. operating voltage of test circuit | V | 690 | | | | | |
| Min. operating voltage of test circuit | V | 195 | | | | | |
| Electrical strength compliant to VDE 0432 part 2 | A | 250 | 250 | 5000 | 5000 | 3000 | 3000 |
| Rated frequency | Hz | 50/60 | | | | | |
| Rated residual operating current $I_{\Delta n}$ | A | 0.3 | 0.3 | 0.3; 1 | 0.3; 1 | 0.03 | 0.03 |
| Switch lever | | BacI(MCB), can be connected in On-Off position + blue (RCD) only in OFF position | | | | | |
| Protection category, housing | | IP4X | | | | | |
| Protection category, terminal | | IP2X | | | | | |
| Permissible operating ambient temperature | °C | -25 ... +60 | | | | | |
| Permissible storage temperature | °C | -40 ... +70 | | | | | |
| Strand connections | mm ² | 6 ... 50 | | | | | |
| Cable connections | mm ² | 6 ... 70 | | | | | |
| Tightening torque | Nm | 3.5 | | | | | |
| Fixed on mounting rail | | EN 60715 | | | | | |

230/400 V Let-through energies S800S-B, -C, -D, -K

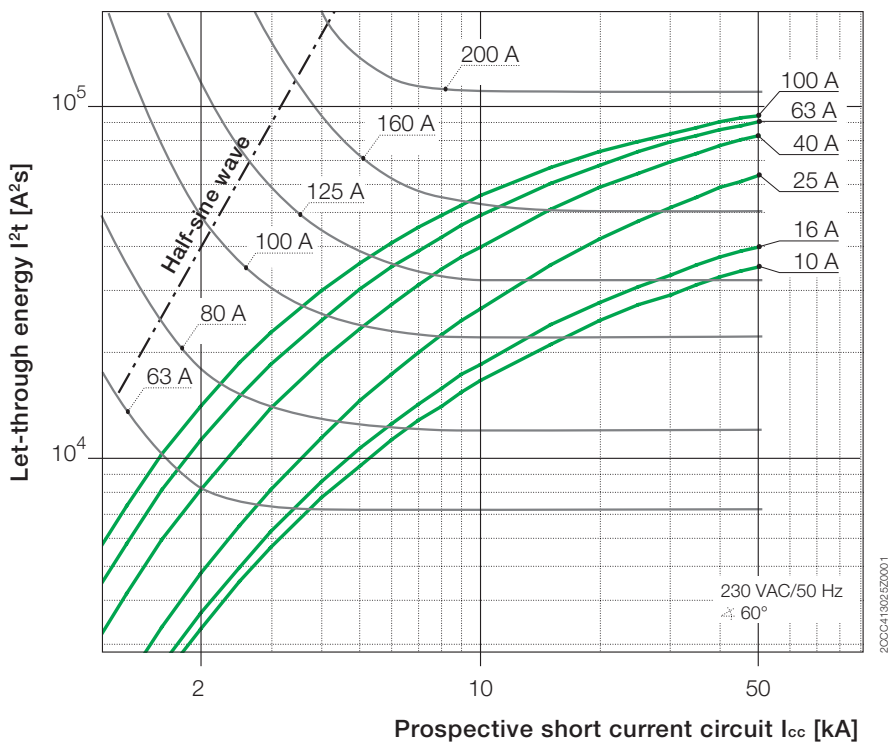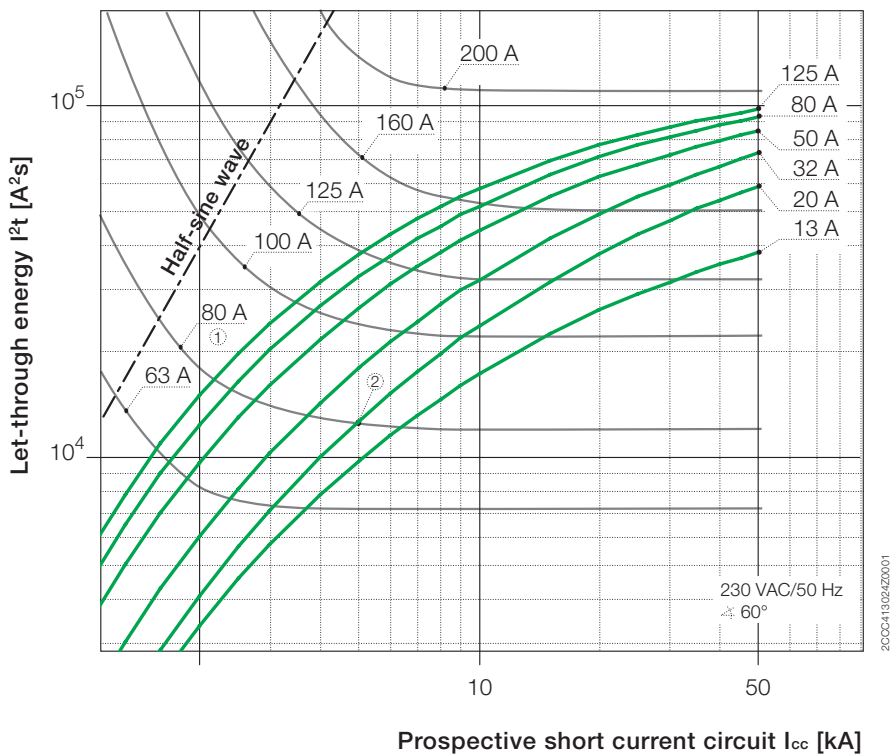


- ① Min. pre-arcing I^2t , e.g. NH80A gL/gG
- ② Max. let-through I^2t , e.g. S801S-C20


Selectivity with respect to the upstream fuse to the point of intersection of both curves 1 and 2, e.g. S801S-C20 to NH80A gL/gG: Selectivity up to min. 5 kA.

440 V Let-through energies S800S-B, -C, -D, -K

3


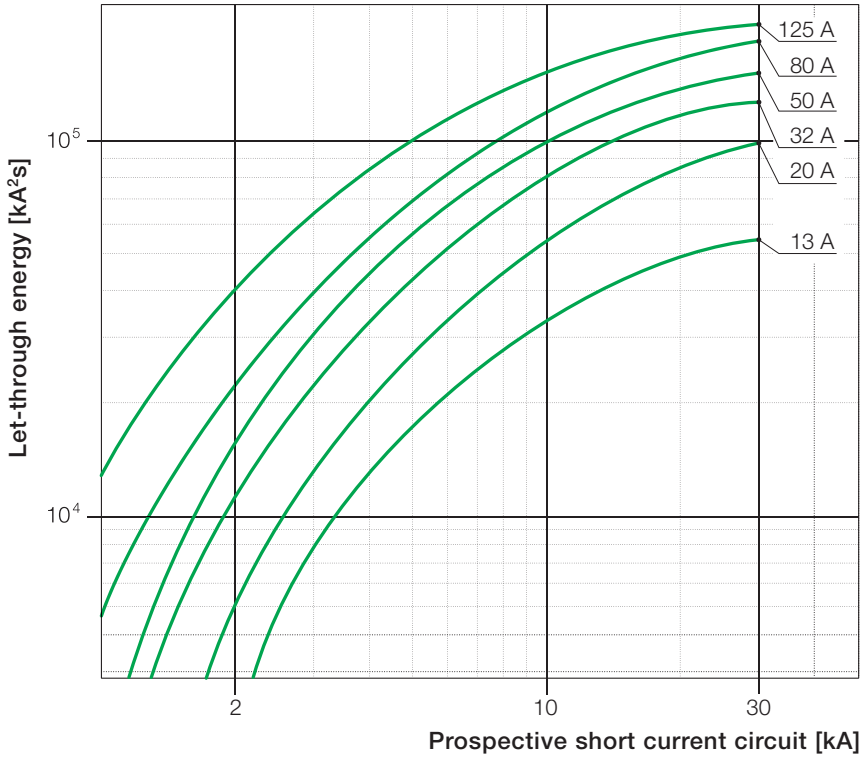


20CC41329/20001

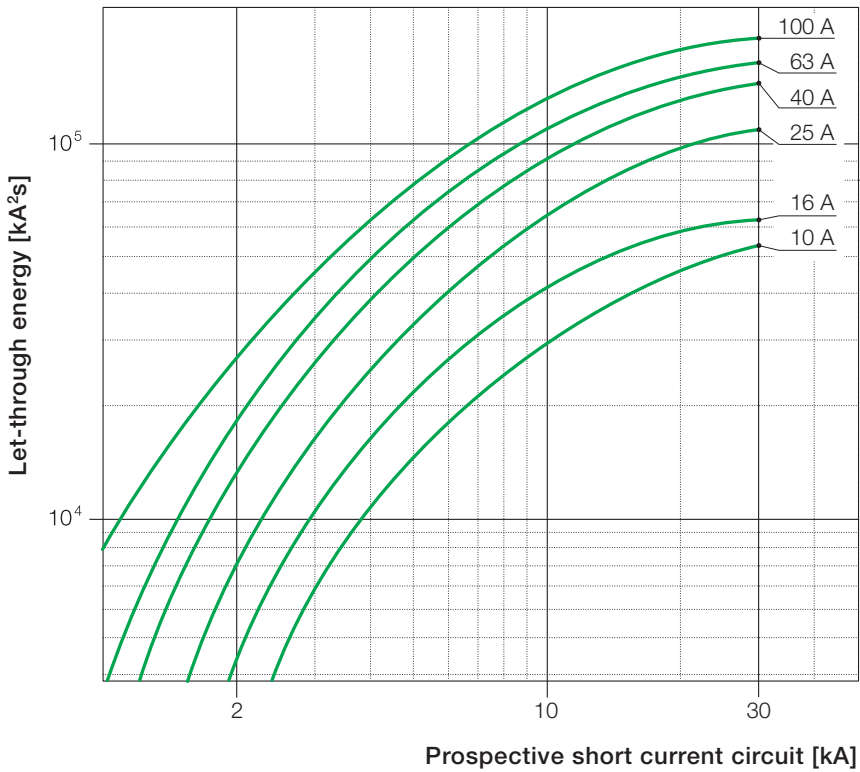



20CC41329/20001

690 V Let-through energies S800S-B, -C, -D, -K

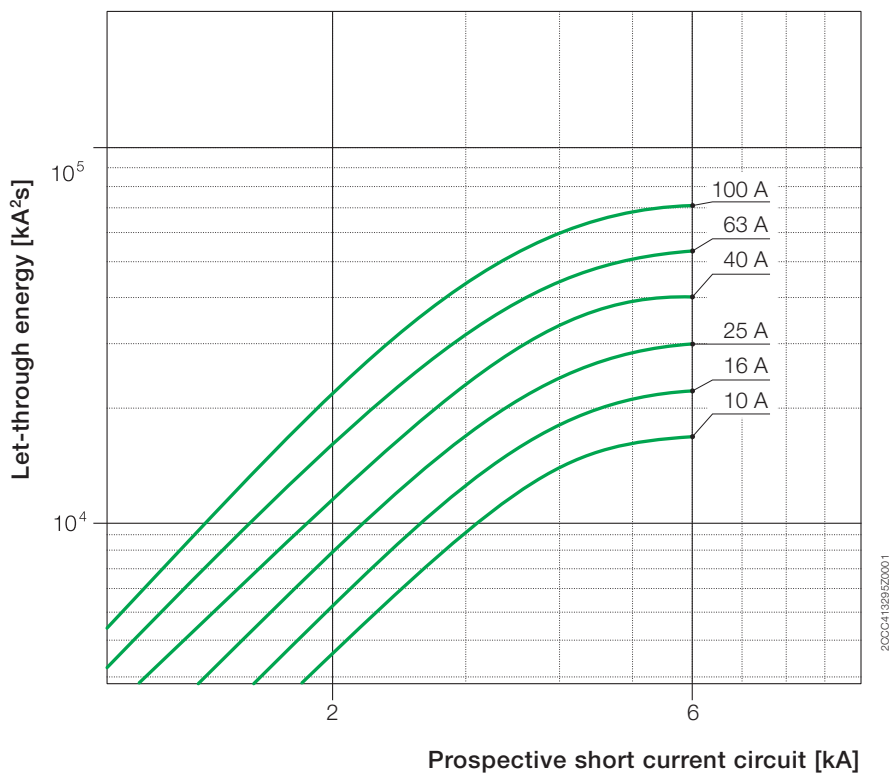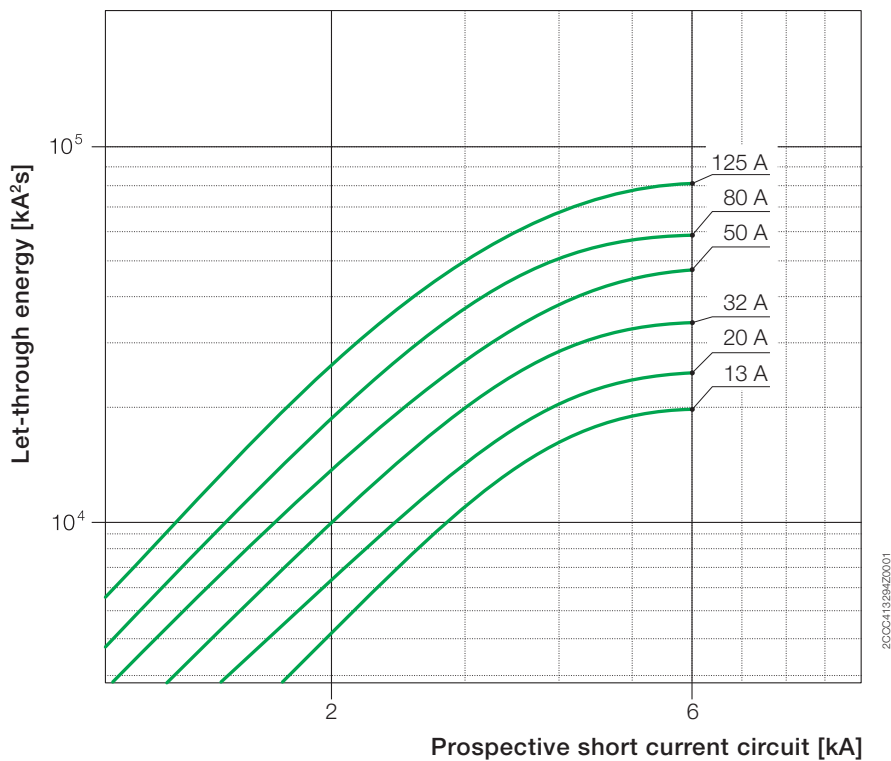

230/400 V Let-through energies S800N-B, -C, -D



3

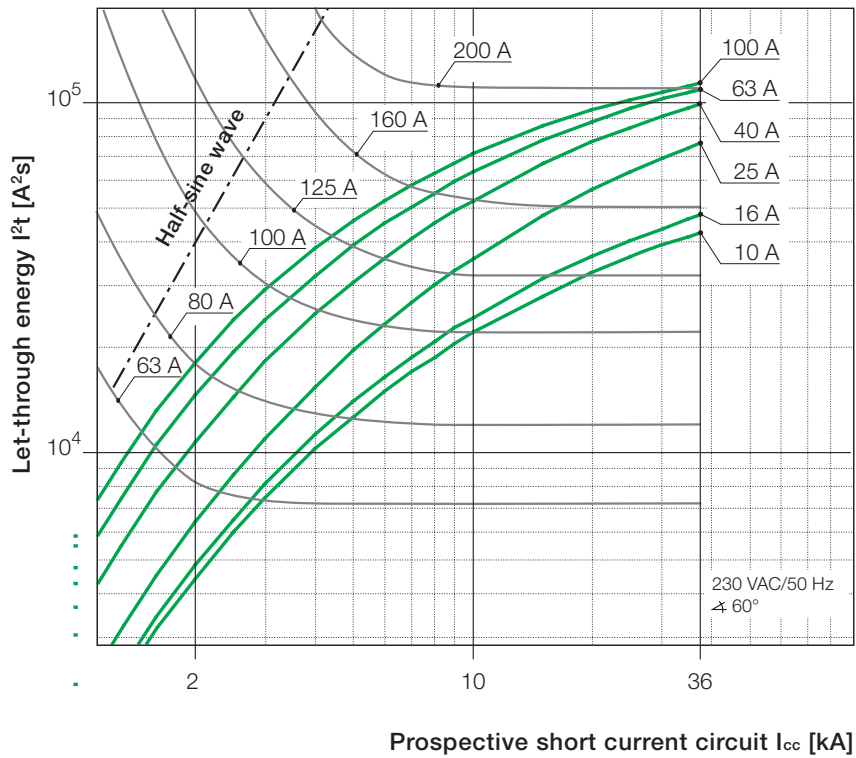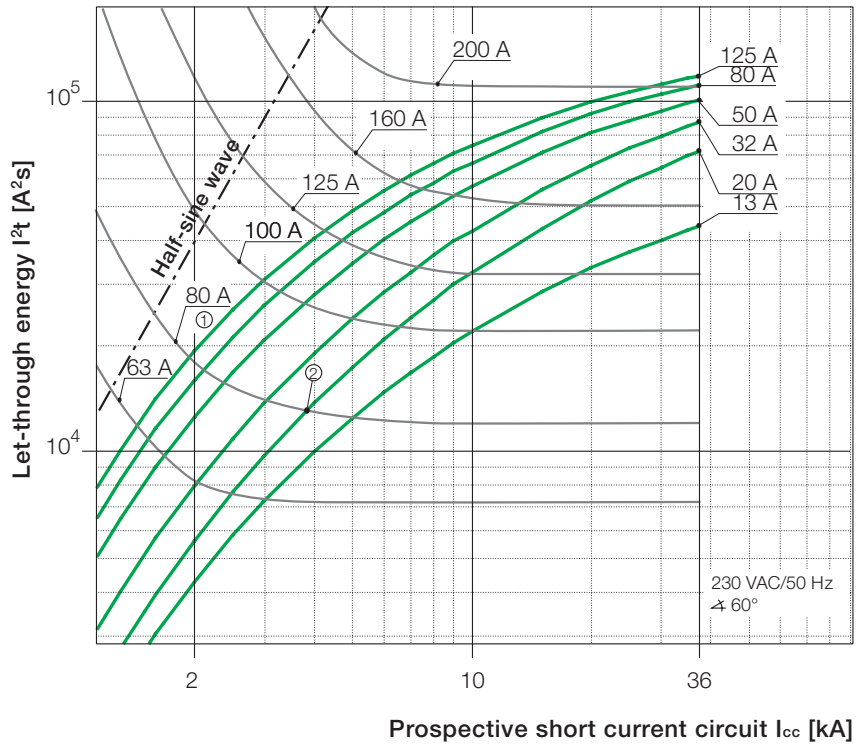

- ① Min. pre-arcing I^2t , e.g. NH80A gL/gG
- ② Max. let-through I^2t , e.g. S801N-C20

Selectivity with respect to the upstream fuse to the point of intersection of both curves 1 and 2, e.g. S801N-C20 to NH80A gL/gG: Selectivity up to min. 3.8 kA.

230/400 V Let-through energies S800C-B, -C, -D, -K

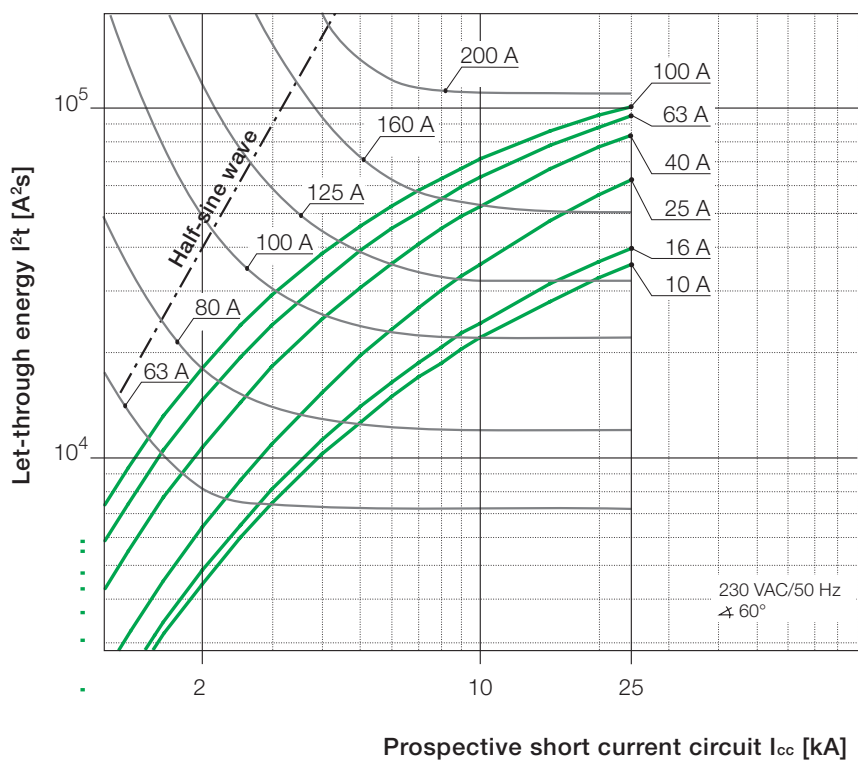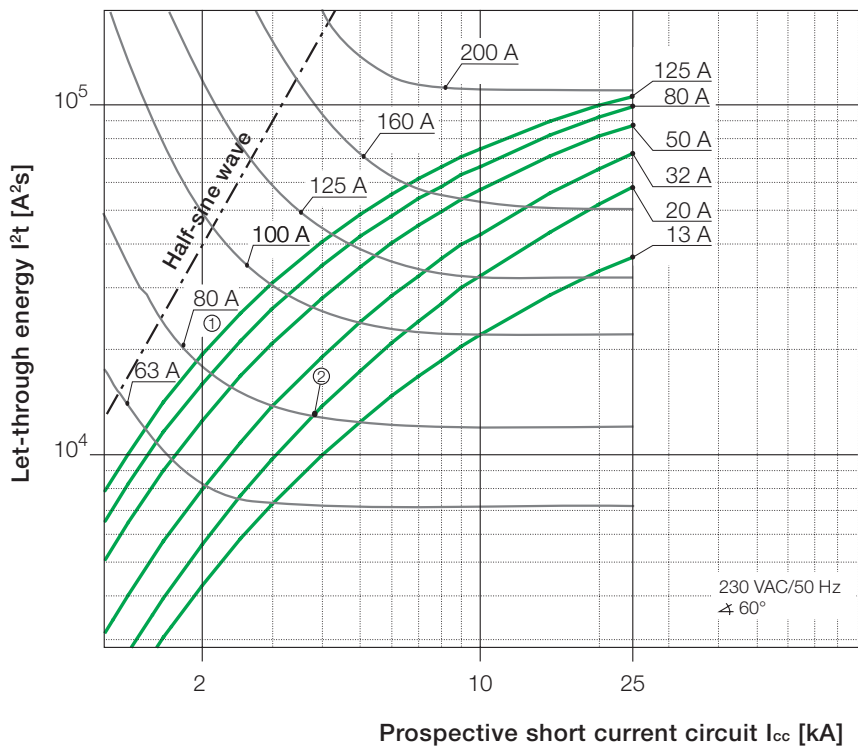


- ① Min. pre-arcing I^2t , e.g. NH80A gL/gG
- ② Max. let-through I^2t , e.g. S801C-C20

Selectivity with respect to upstream fuse to the point of intersection of both curves 1 and 2, e.g. S801C-C20 to NH80A gL/gG: Selectivity up to min. 3.8 kA

230/400 V Let-through energies


S800B-B, -C, -D, -K

3

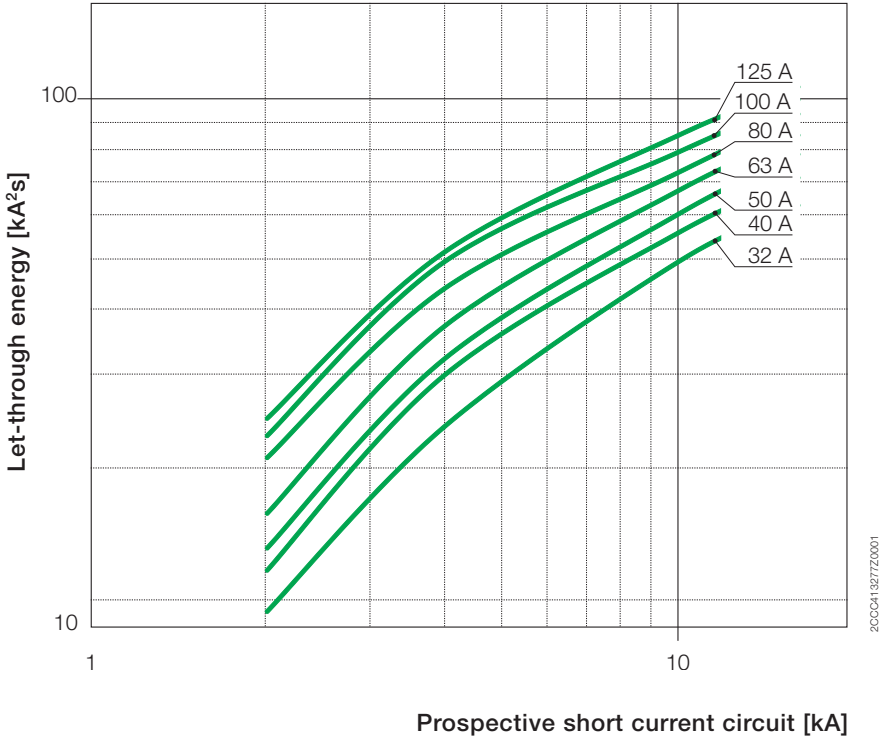

2CCC413277Z0001



240 V Let-through energies S800U-Z, -K

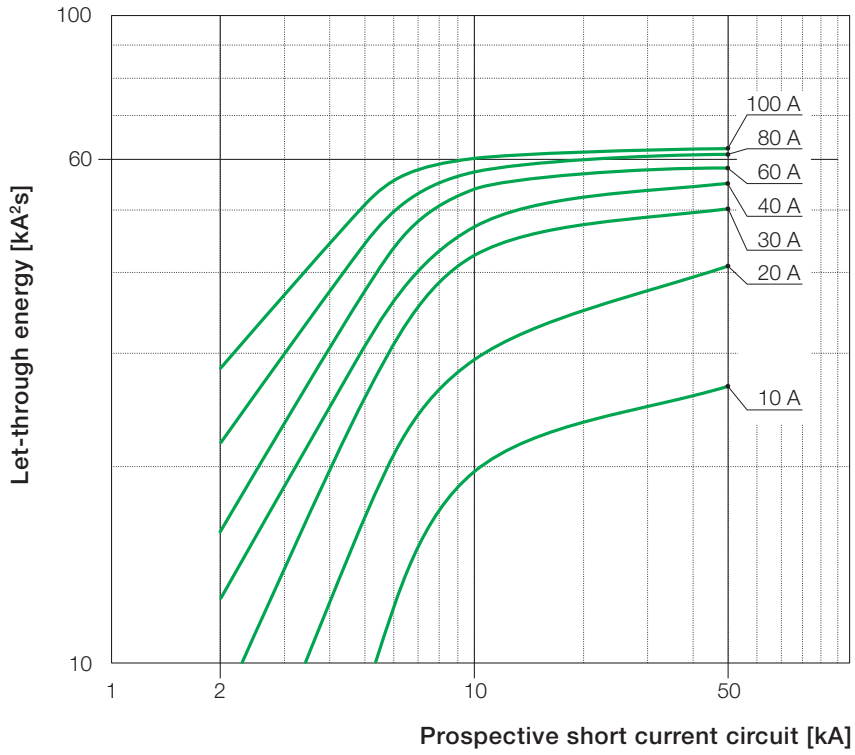



2CCC413286Z0001

230/400 V Let-through current S800S-B, -C, -D, -K

3

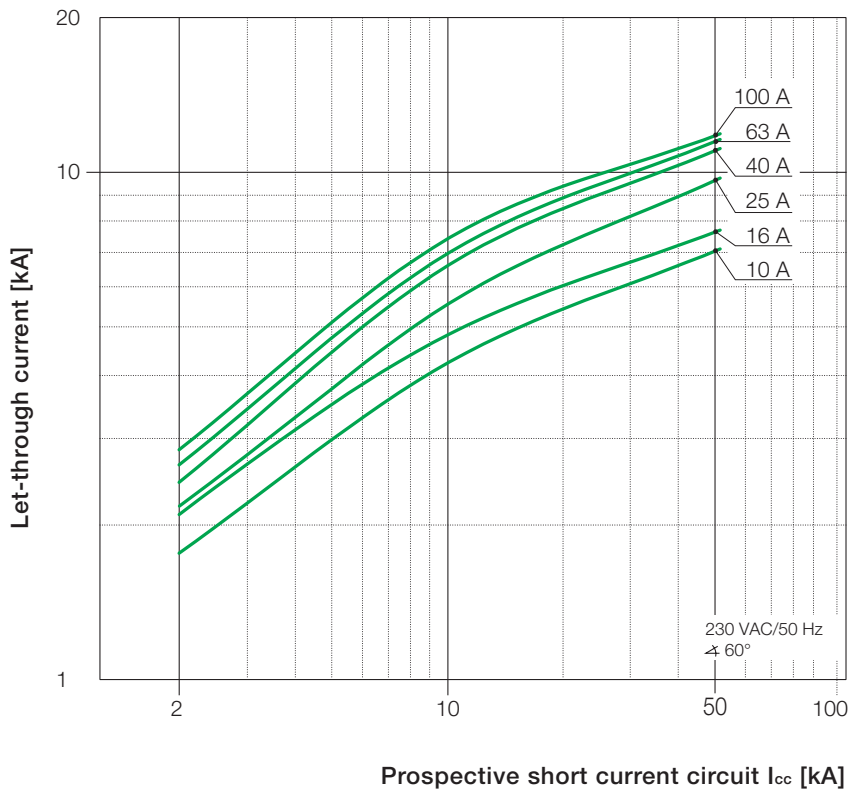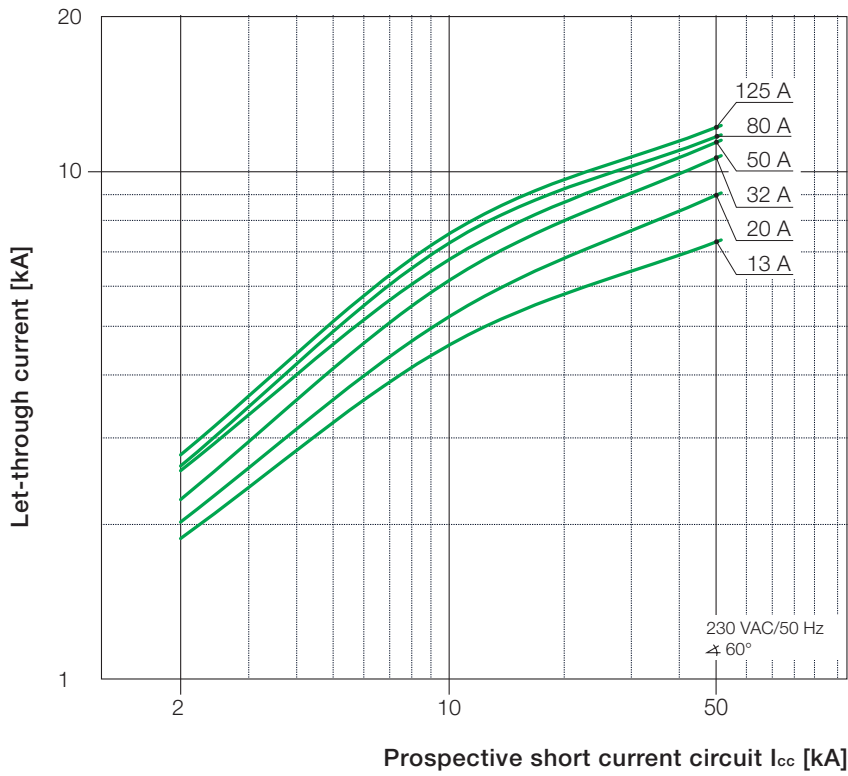


440 V Let-through current S800S-B, -C, -D, -K

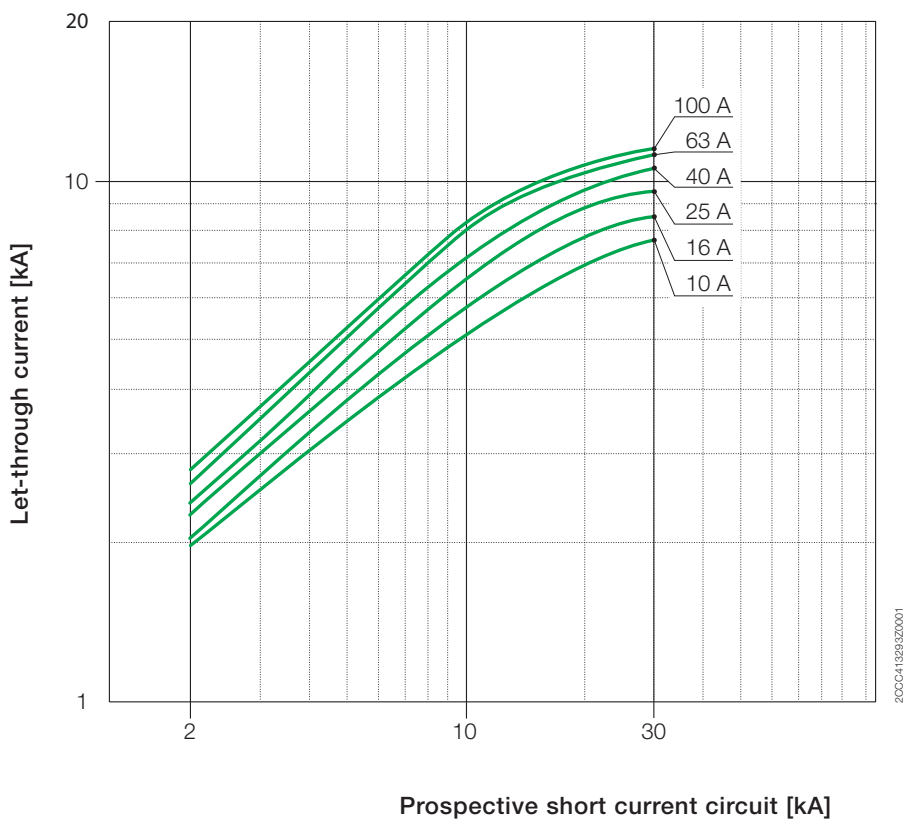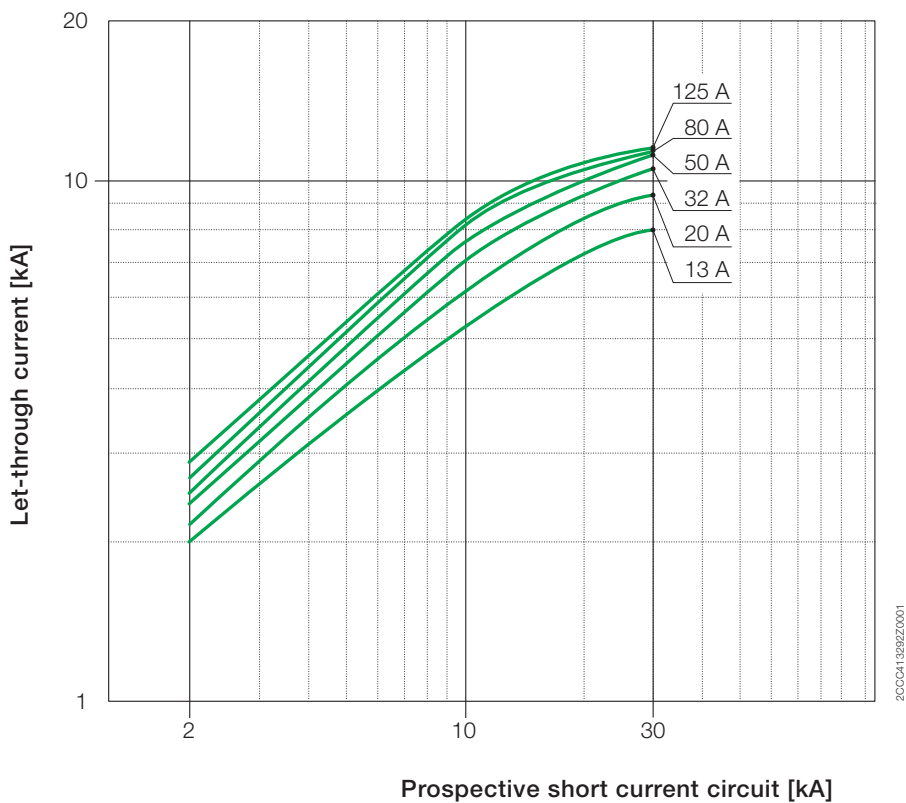


690 V Let-through current S800S-B, -C, -D, -K

3


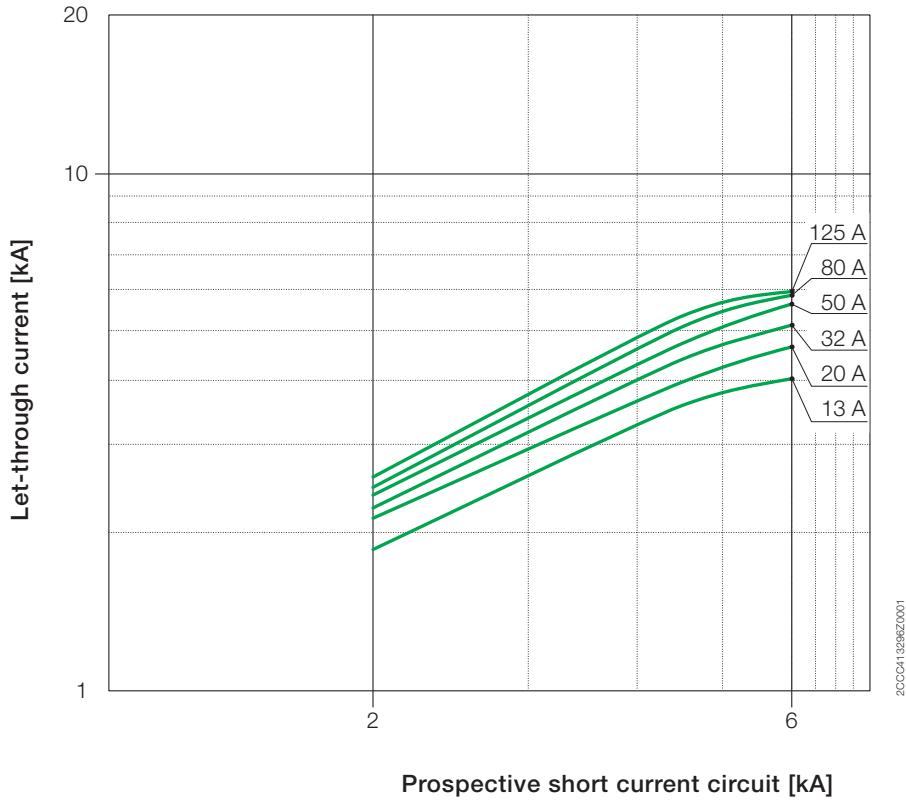


2000413296Z0001

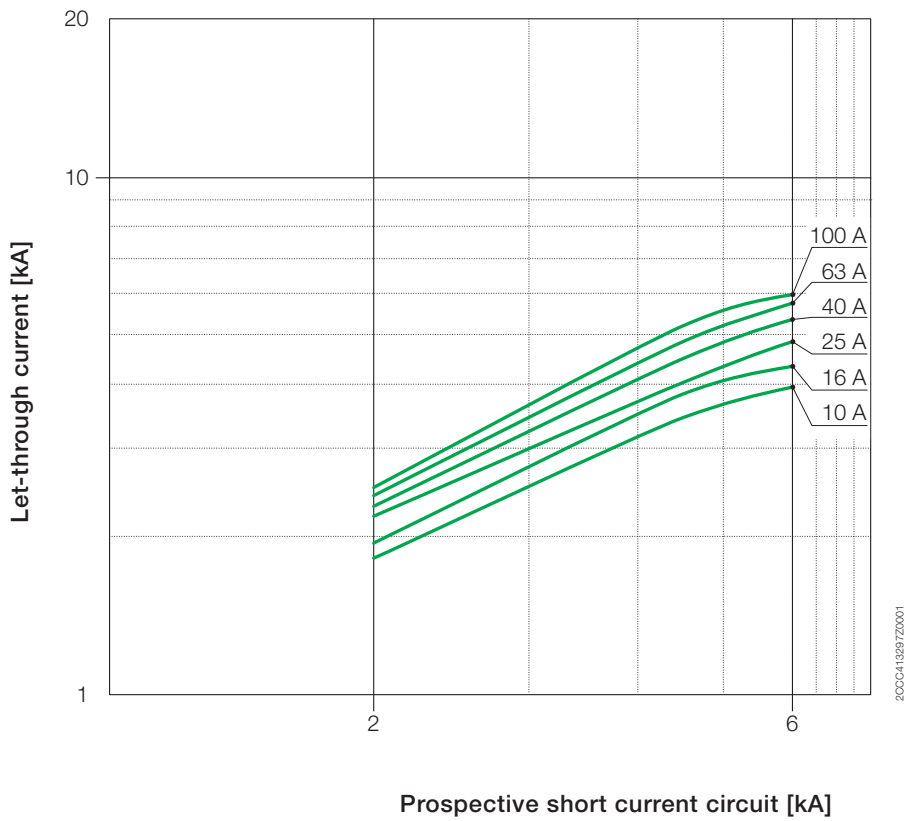



2000413297Z0001

230/400 V Let-through current S800N-B, -C, -D

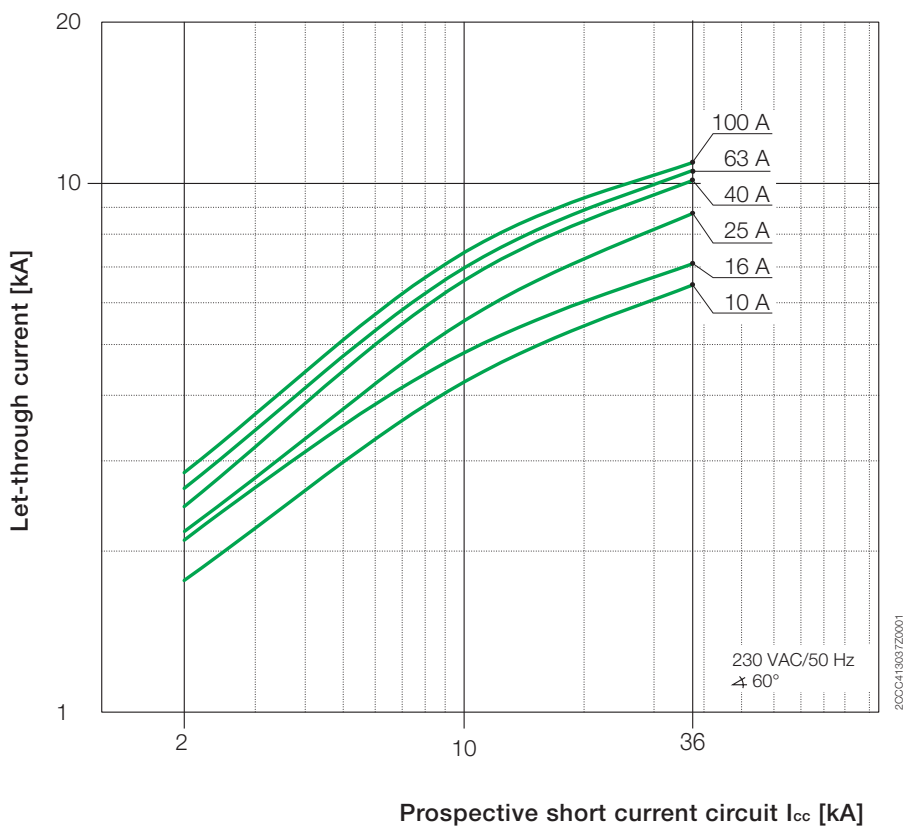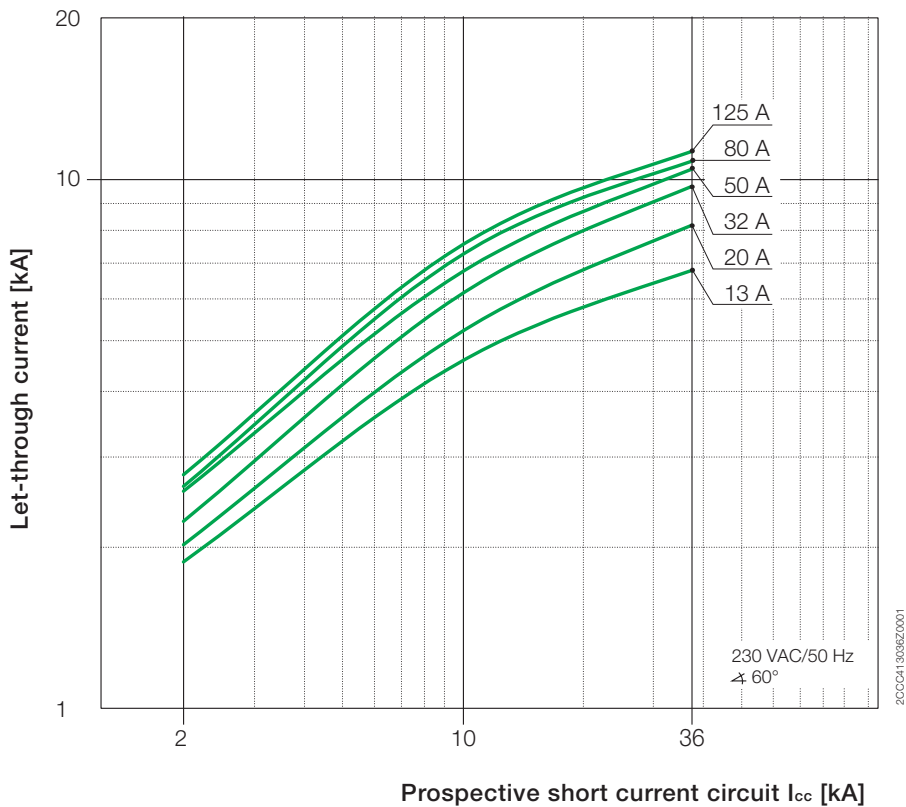


230/400 V Let-through current S800C-B, -C, -D, -K

3

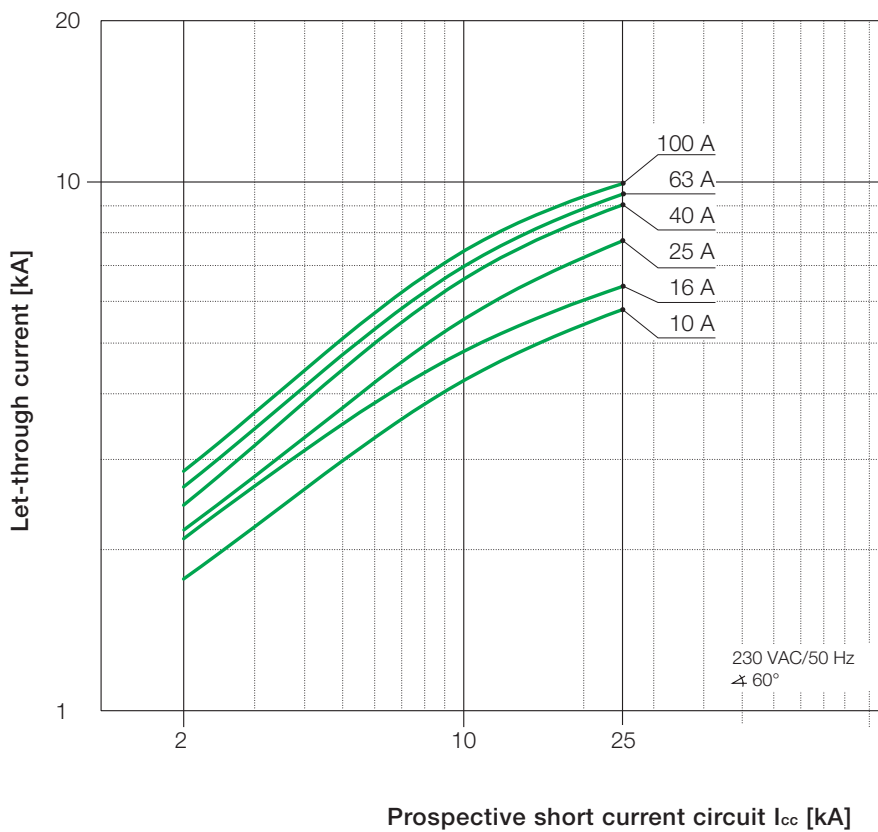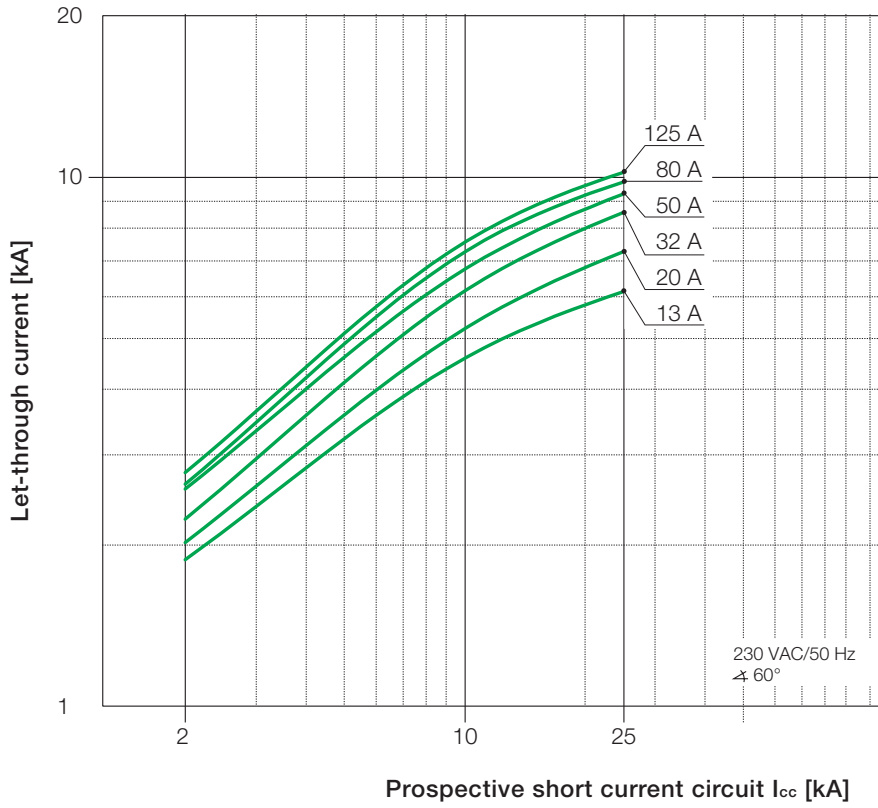


230/400 V Let-through current

S800B-B, -C, -D, -K

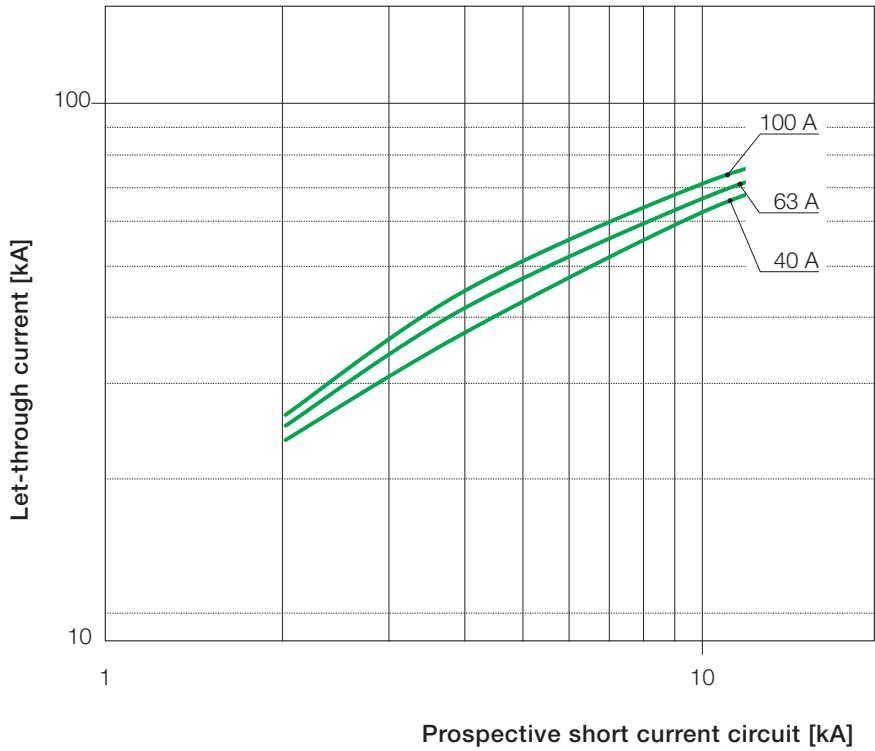


20CC041827620001

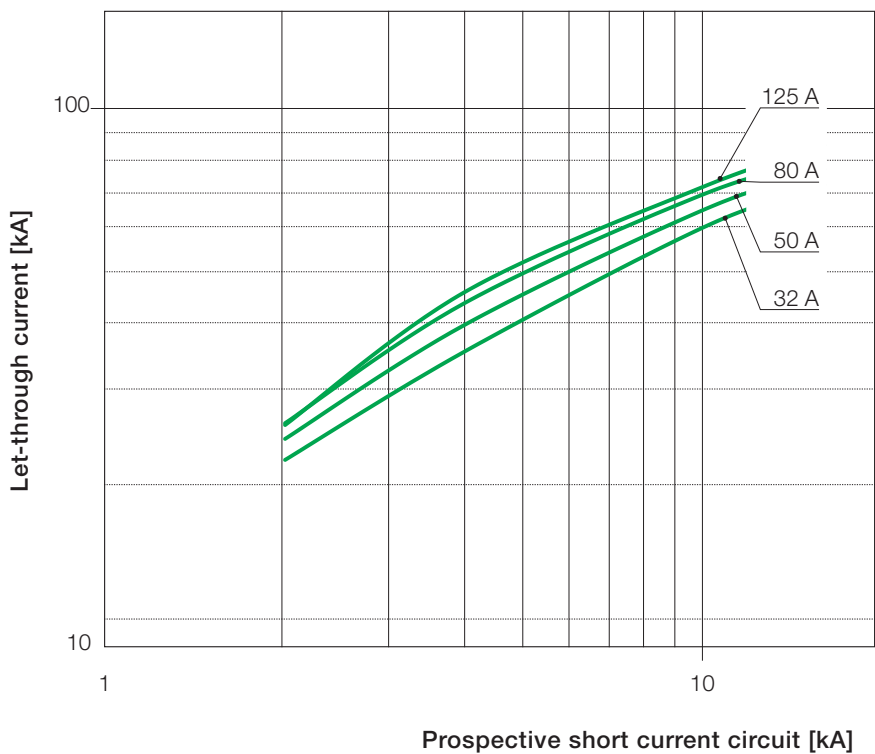


20CC041827620001

240 V Let-through current S800U-Z, -K

3

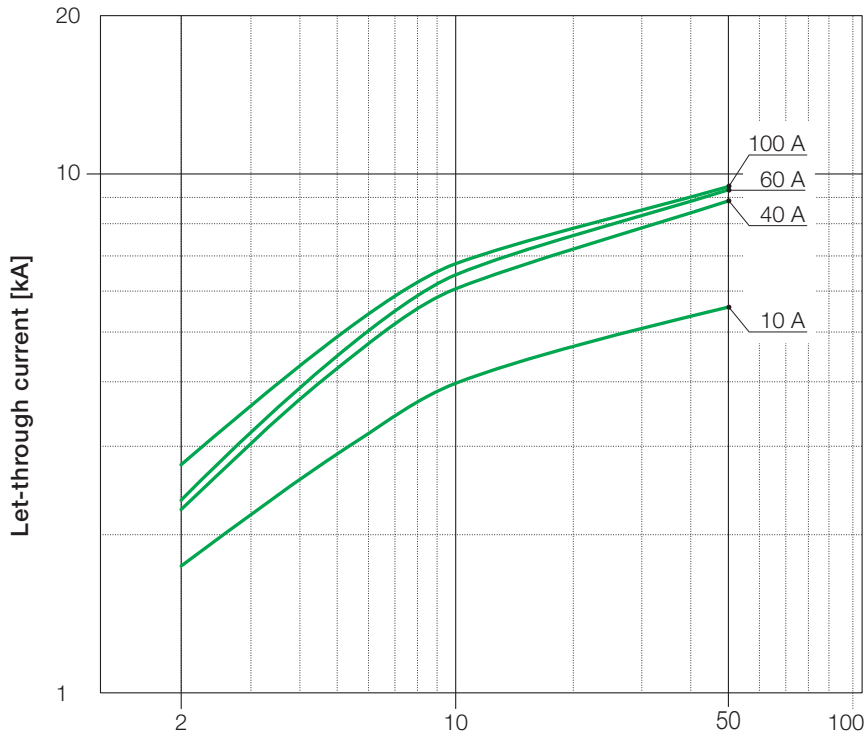

Prospective short current circuit I_{cc} [kA]

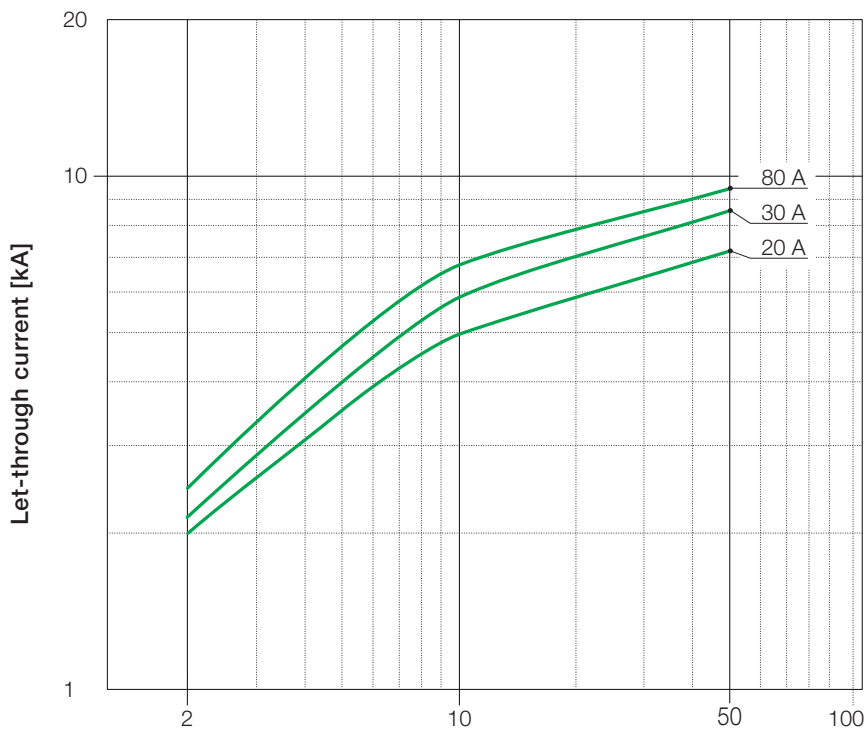

Prospective short current circuit I_{cc} [kA]

Table of content S800

Pole dimensions

| | |
|---------|-----|
| S800 | 4/2 |
| S800S-R | 4/2 |

Dimensions of accessories



| | |
|-----------------------------|-----|
| S800-AUX | 4/3 |
| S800-AUX/ALT | 4/3 |
| S800-NT | 4/3 |
| S800-RSU | 4/5 |
| S800W-RSU | 4/5 |
| S803S-SCL | 4/5 |
| S800S-SCL-SR | 4/5 |
| S803W-SCL-SR, S803HV-SCL-SR | 4/6 |
| S800-SOR | 4/6 |
| S800-UVR | 4/6 |
| S800-BB250 | 4/6 |
| S800-BBPC120 | 4/6 |
| S800-RD + S800-RHE | 4/7 |
| DDA802 | 4/7 |
| DDA803 | 4/7 |
| DDA804 | 4/7 |
| DS802 | 4/8 |
| DS803 | 4/8 |
| DS804 | 4/8 |

Pole dimensions



High performance MCB

S800S
S800N
S800C
S800B
S800U
S800PV-S
S800PV-M


4

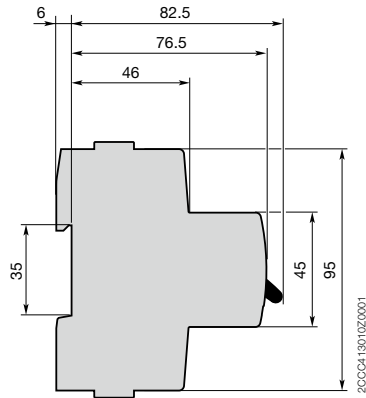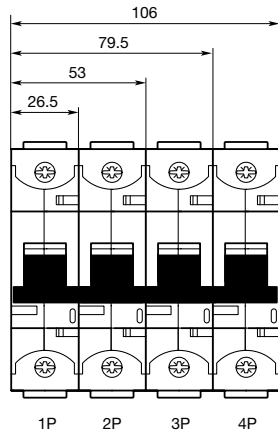

S800
with Ringlug
terminals

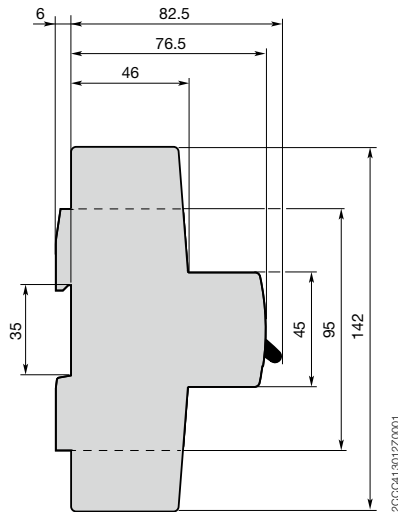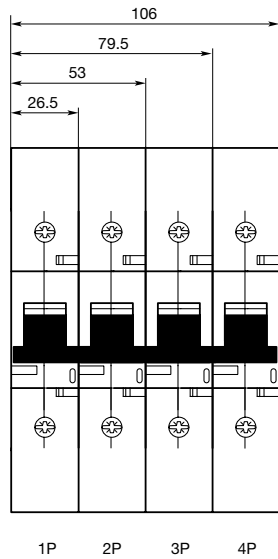

Dimensions of accessories

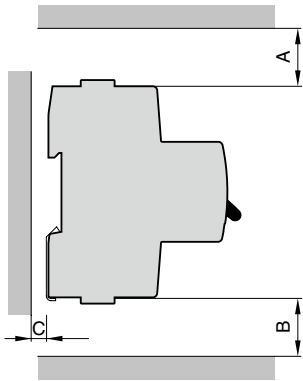

20004130/56Z002

S800S, S800N, S800C

up to 254/440 Vac or 500 Vdc

S800S-UC

up to 1000 Vdc

S800S-SCL-SR

up to 400/690 Vac

| Dimensions | isolated parts/surfaces | not isolated parts/surfaces |
|------------|-------------------------|-----------------------------|
| A | 25 | 100 |
| B | 25 | 25 |
| C | 7 | 50 |

S800S, S800N, S800C, S800HV

from 254/440 Vac up to 400/690 Vac or 588/1000 Vac (S800HV)

S800B

up to 230/400 Vac or 300 Vdc

S800PV-S

up to 1200 Vdc

| Dimensions | isolated parts/surfaces | not isolated parts/surfaces |
|------------|-------------------------|-----------------------------|
| A | 25 | 50 |
| B | 25 | 25 |
| C | 7 | 50 |


S800HV-SCLxx-SR

up to 588/1000 Vac


| Dimensions | isolated parts/surfaces | not isolated parts/surfaces |
|------------|-------------------------|-----------------------------|
| A | 25 | 150 |
| B | 25 | 25 |
| C | 7 | 50 |

Dimensions of accessories


S800-AUX

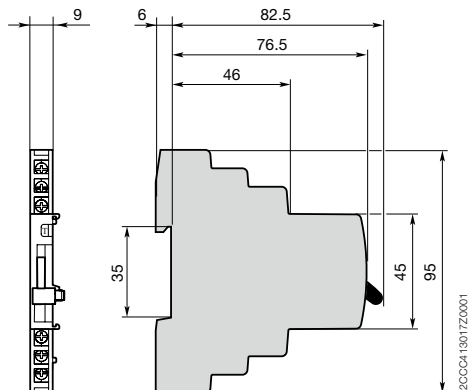

S800-AUX/ALT

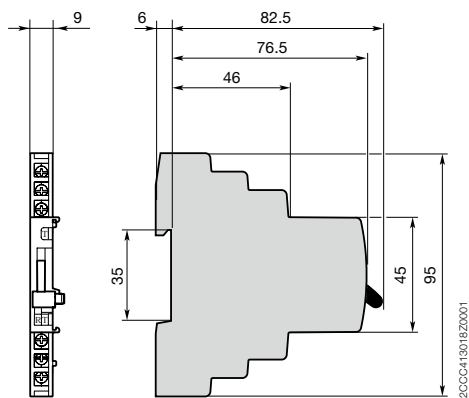


S800-NT

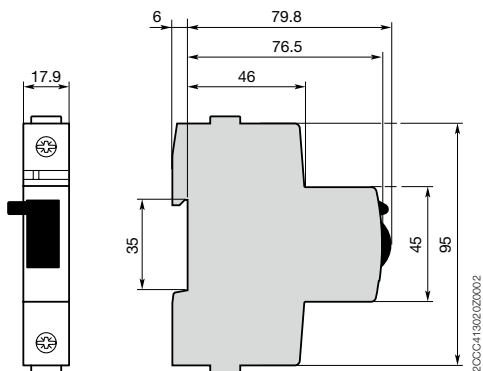


Pole dimensions

High performance MCB


S800-RSU-H

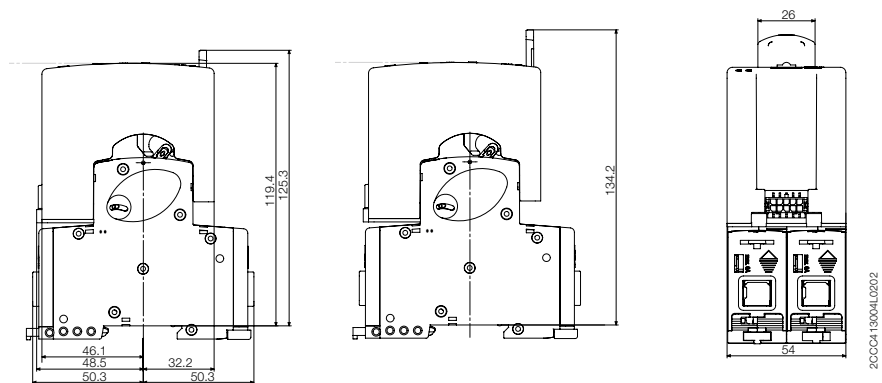


S800W-RSU

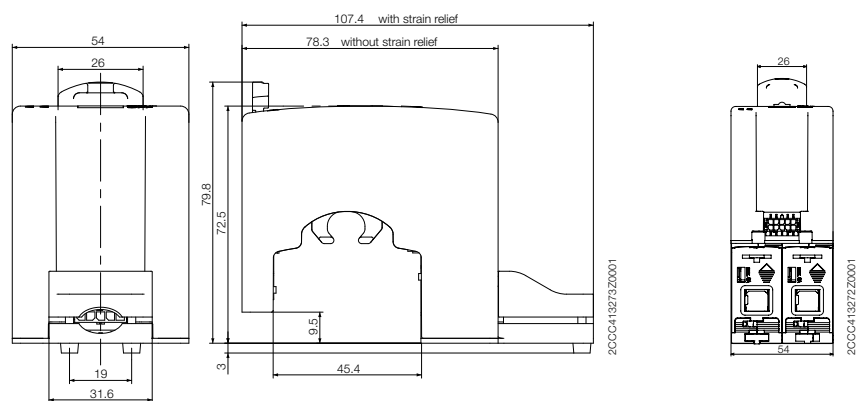


S803S-SCL

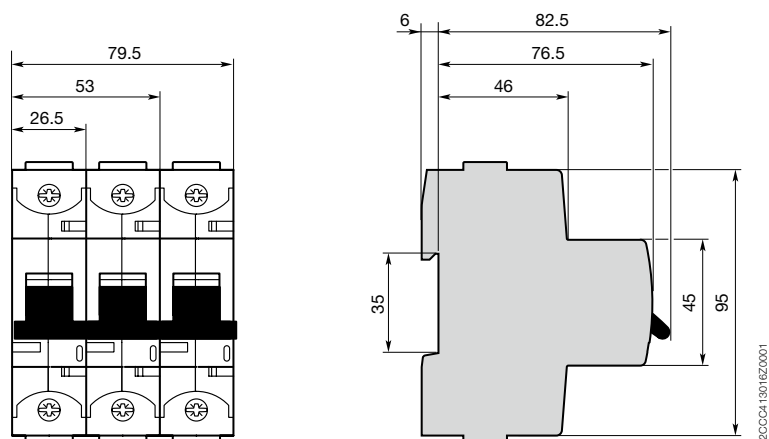

S800S-SCL-SR

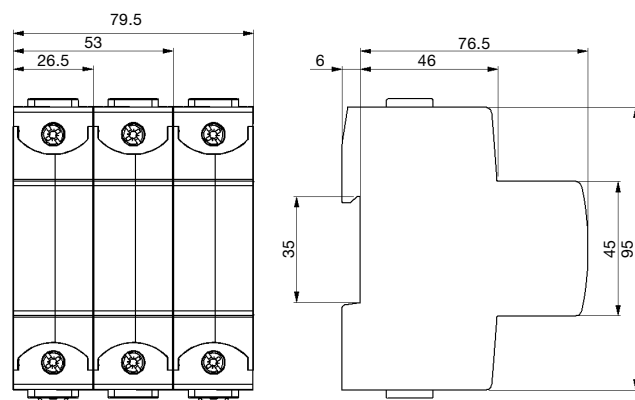


S803W-SCL-SR
S803HV-SCL-SR

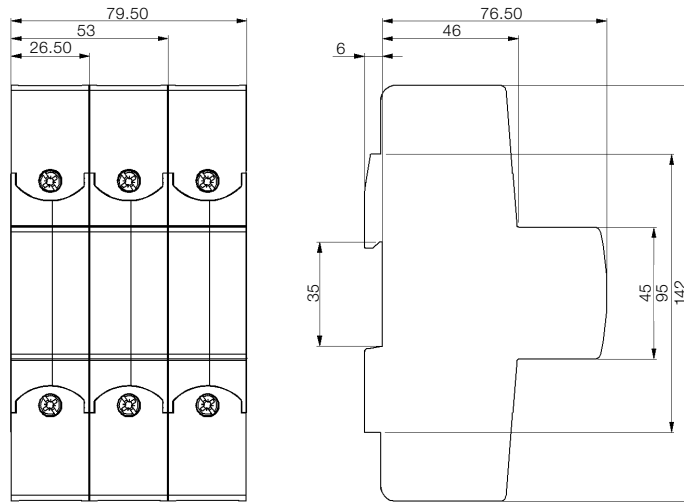


4


S800-SOR
S800-UVR

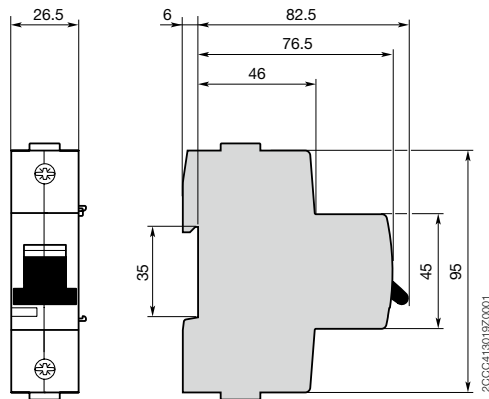

S800-BB250

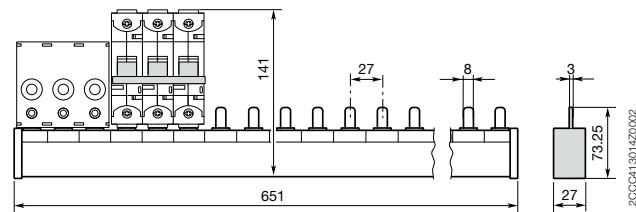


S800-BBPC120

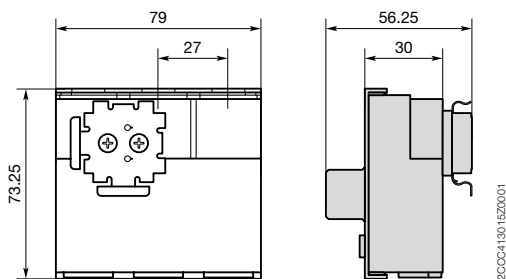


Pole dimensions

High performance MCB


S800-RD +
S800-RHE

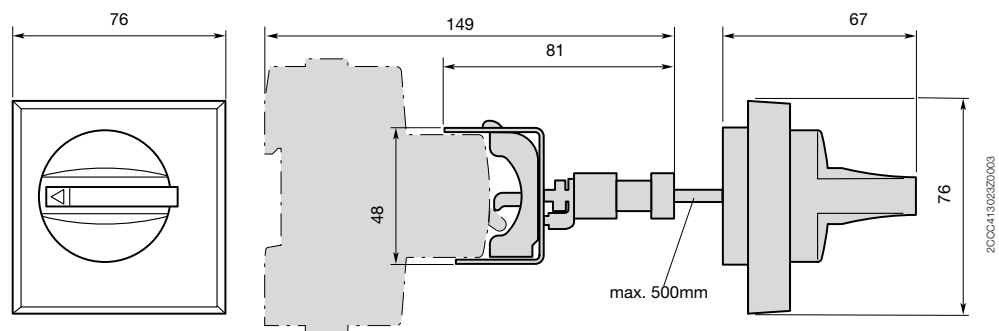


S802-LINK50
S802-LINK125

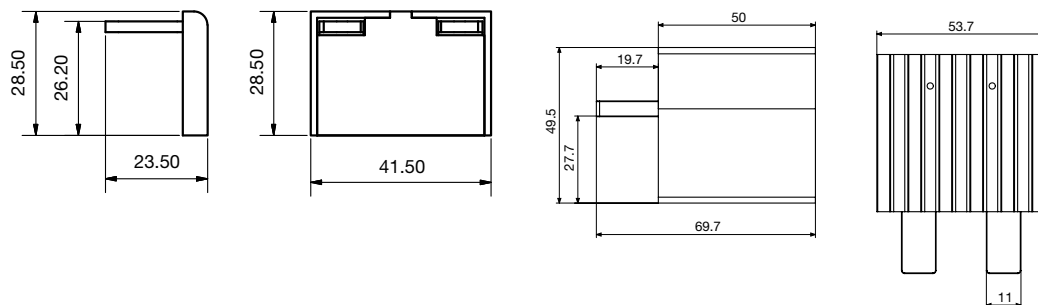


CMS-100S8

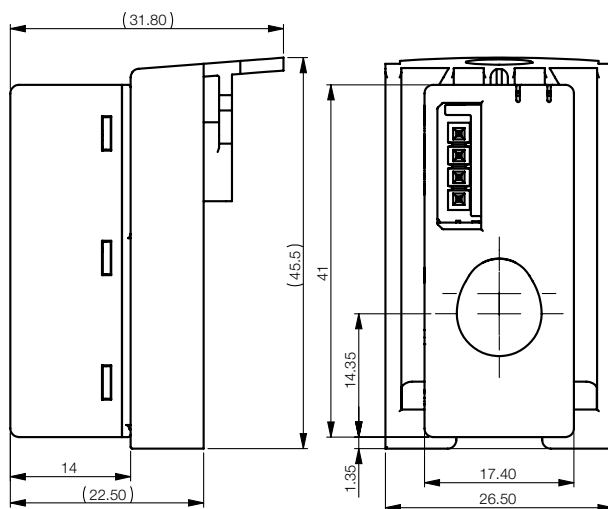

CMS-200S8

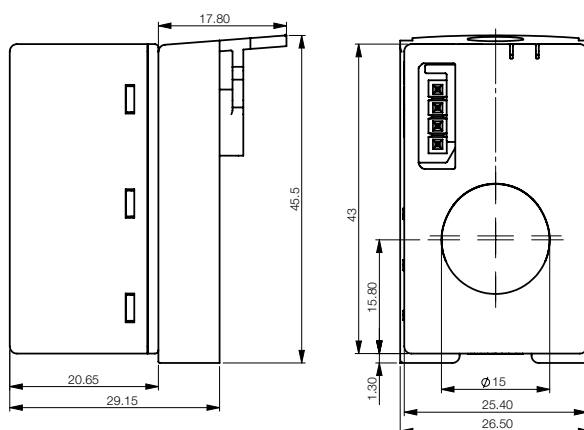


CMS-600

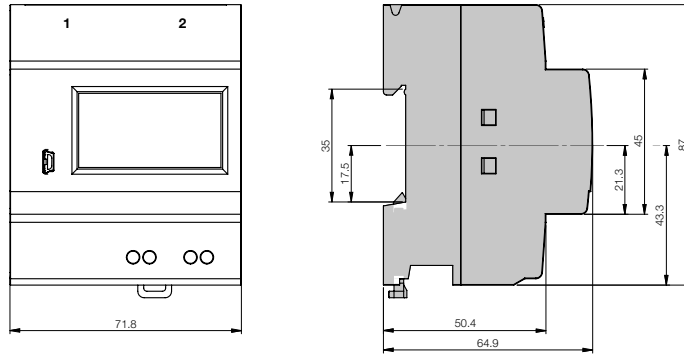


4


DDA802

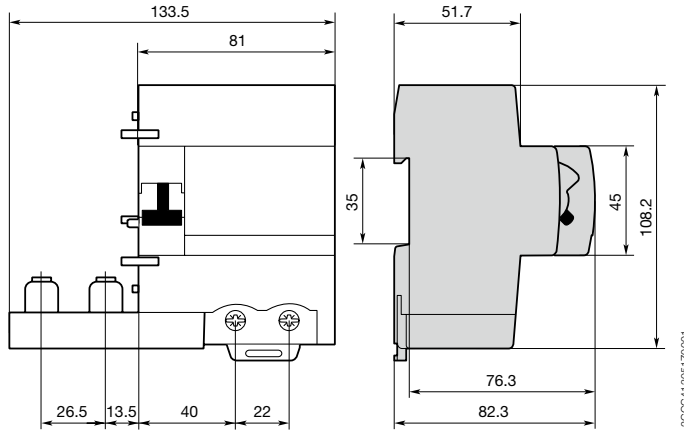

DDA803

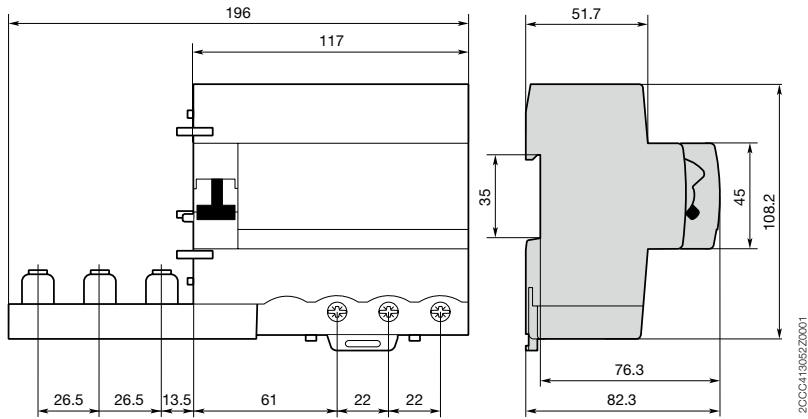


DDA804

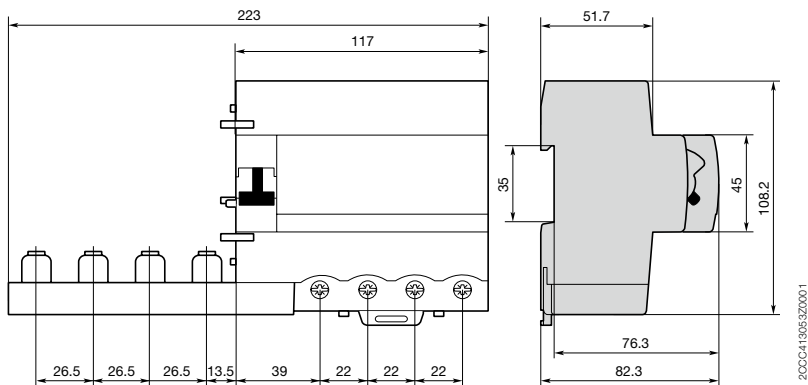

Pole dimensions


High performance MCB

DS802

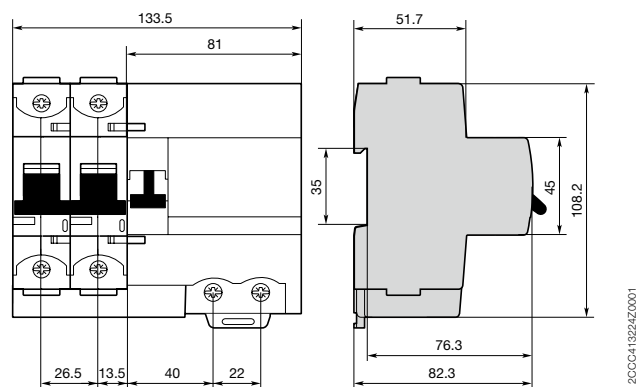

4

DS803

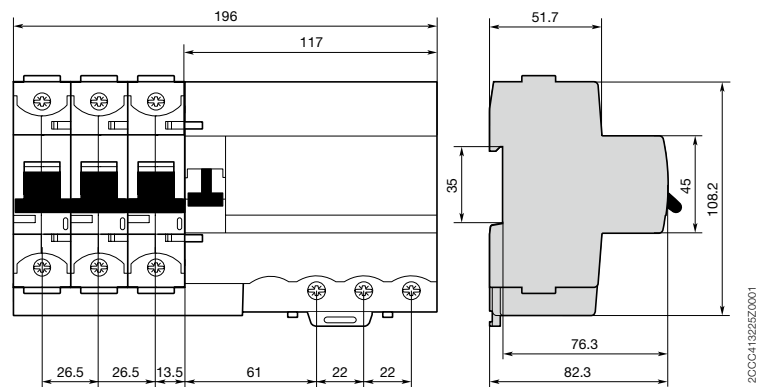

DS804

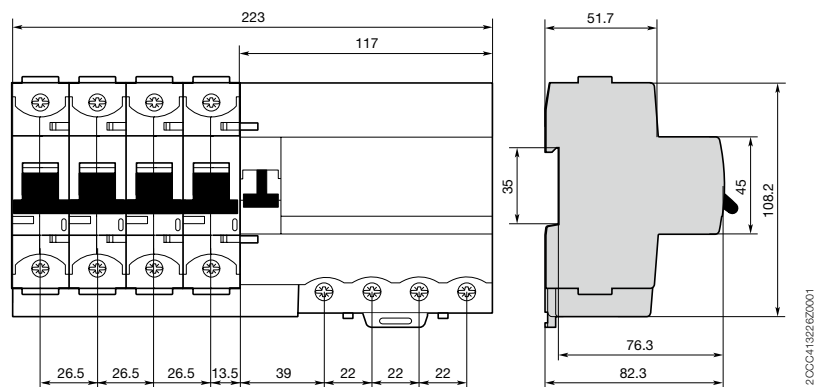












Table of content S800

Approvals and certifications

5

| | Switzerland  | Germany  | China  | US/Canada  | Russia  | Norway Marine  | Germany Marine  | Great Britain Marine  | Italy Marine  | Russia Marine  |
|----------------------------------|--|--|--|--|---|---|---|---|---|--|
| S800 Main devices | | | | | | | | | | |
| S800S High performance MCB B | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ |
| S800S High performance MCB C | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ |
| S800S High performance MCB D | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ |
| S800S High performance MCB K | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ | ■ |
| S800U High performance MCB UL489 | | | | ■ | | | | | | |
| S800S High performance MCB KM | | | | | ■ | | | | | |
| S800S High performance MCB UCB | ■ | ■ | ■ | | ■ | | | | | ■ |
| S800S High performance MCB UCK | ■ | ■ | ■ | | ■ | | | | | ■ |
| S800N High performance MCB B | ■ | ■ | ■ | | ■ | | | | | |
| S800N High performance MCB C | ■ | ■ | ■ | | ■ | | | | | |
| S800N High performance MCB D | ■ | ■ | ■ | | ■ | | | | | |
| S800C High performance MCB B | ■ | ■ | ■ | | ■ | | | | | |
| S800C High performance MCB C | ■ | ■ | ■ | | ■ | | | | | |
| S800C High performance MCB D | ■ | ■ | ■ | | ■ | | | | | |
| S800C High performance MCB K | | ■ | ■ | | ■ | | | | | |
| S800B High performance MCB B | ■ | □* | | | ■ | | | | | |
| S800B High performance MCB C | ■ | □* | | | ■ | | | | | |
| S800B High performance MCB D | ■ | □* | | | ■ | | | | | |
| S800B High performance MCB K | ■ | □* | | | ■ | | | | | |
| S800PV-S High performance MCB | | ■ | ■ | | | | | | | |
| S800PV-M High performance MCB | | ■ | ■ | | | | | | | |
| S802PV-M-H High performance MCB | | ■ | ■ | | | | | | | |
| S800 accessories | | | | | | | | | | |
| S800-AUX | ■ | ■ | | ■ | | ■ | ■ | ■ | ■ | ■ |
| S800-AUX/ALT | ■ | ■ | ■ | ■ | | ■ | ■ | ■ | ■ | ■ |
| S800-NT | ■ | | ■ | | | | | | | |
| S800W-RSU | | | | ■ | | | | | | |
| S803S-SCL | | | | | | ■ | ■ | | ■ | ■ |
| S803W-SCL-SR | | | □** | ■ | | ■ | ■ | | | |
| S800-SCL-SR | | | □** | | | ■ | | | | |
| S800-SOR | | | | ■ | | | | | | |
| S800-UVR | | | | ■ | | | | | | |

- devices are approved
- * valid from 06/2015
- ** exempted (not required to have CCC approval)

Table of content S500

| | |
|------------------|------|
| S500-K | 6/2 |
| S500UC-K | 6/4 |
| S500HV | 6/6 |
| S500X-AG1499 | 6/7 |
| S500X-AG0084 | 6/9 |
| F500-K | 6/10 |
| Accessories S500 | 6/11 |

S500-K Characteristic K

I_{cu} up to 50 kA; adjustable high performance MCB



2CC012002F0001



| I_{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 50 | 0.1–0.15 | S501-K0,15 | 2CCF008856R0001 | 0303007 | 0.25 | 1 |
| 50 | 0.14–0.21 | S501-K0,21 | 2CCF008857R0001 | 0303014 | 0.25 | 1 |
| 50 | 0.2–0.3 | S501-K0,3 | 2CCF008858R0001 | 0303021 | 0.25 | 1 |
| 50 | 0.28–0.42 | S501-K0,42 | 2CCF008859R0001 | 0303038 | 0.25 | 1 |
| 50 | 0.38–0.58 | S501-K0,58 | 2CCF008860R0001 | 0303045 | 0.25 | 1 |
| 50 | 0.53–0.8 | S501-K0,8 | 2CCF008861R0001 | 0303052 | 0.25 | 1 |
| 50 | 0.73–1.1 | S501-K1,1 | 2CCF008862R0001 | 0303069 | 0.25 | 1 |
| 50 | 1–1.5 | S501-K1,5 | 2CCF008863R0001 | 0303076 | 0.25 | 1 |
| 50 | 1.4–2.1 | S501-K2,1 | 2CCF008864R0001 | 0303083 | 0.25 | 1 |
| 50 | 2–3 | S501-K3 | 2CCF008865R0001 | 0303090 | 0.25 | 1 |
| 50 | 2.8–4.2 | S501-K4,2 | 2CCF008866R0001 | 0303106 | 0.25 | 1 |
| 50 | 3.8–5.8 | S501-K5,8 | 2CCF008867R0001 | 0303113 | 0.25 | 1 |
| 50 | 5.3–8 | S501-K8 | 2CCF008868R0001 | 0303120 | 0.25 | 1 |
| 50 | 7.3–11 | S501-K11 | 2CCF008869R0001 | 0303137 | 0.25 | 1 |
| 30 | 10–15 | S501-K15 | 2CCF008870R0001 | 0303144 | 0.25 | 1 |
| 30 | 14–20 | S501-K20 | 2CCF008871R0001 | 0303151 | 0.25 | 1 |
| 30 | 18–26 | S501-K26 | 2CCF008872R0001 | 0303168 | 0.25 | 1 |
| 30 | 23–32 | S501-K32 | 2CCF008873R0001 | 0303175 | 0.25 | 1 |
| 30 | 29–37 | S501-K37 | 2CCF008874R0001 | 0303182 | 0.25 | 1 |
| 30 | 34–41 | S501-K41 | 2CCF008875R0001 | 0303199 | 0.25 | 1 |
| 30 | 38–45 | S501-K45 | 2CCF008888R0001 | 0303205 | 0.25 | 1 |



2CC012007F0001



| | | | | | | |
|----|-----------|------------|-----------------|---------|-----|---|
| 50 | 0.1–0.15 | S502-K0,15 | 2CCF008894R0001 | 0303250 | 0.5 | 1 |
| 50 | 0.14–0.21 | S502-K0,21 | 2CCF008895R0001 | 0303267 | 0.5 | 1 |
| 50 | 0.2–0.3 | S502-K0,3 | 2CCF008896R0001 | 0303274 | 0.5 | 1 |
| 50 | 0.28–0.42 | S502-K0,42 | 2CCF008897R0001 | 0303281 | 0.5 | 1 |
| 50 | 0.38–0.58 | S502-K0,58 | 2CCF008898R0001 | 0303298 | 0.5 | 1 |
| 50 | 0.53–0.8 | S502-K0,8 | 2CCF008899R0001 | 0303304 | 0.5 | 1 |
| 50 | 0.73–1.1 | S502-K1,1 | 2CCF008900R0001 | 0303311 | 0.5 | 1 |
| 50 | 1–1.5 | S502-K1,5 | 2CCF008901R0001 | 0303328 | 0.5 | 1 |
| 50 | 1.4–2.1 | S502-K2,1 | 2CCF008902R0001 | 0303335 | 0.5 | 1 |
| 50 | 2–3 | S502-K3 | 2CCF008903R0001 | 0303342 | 0.5 | 1 |
| 50 | 2.8–4.2 | S502-K4,2 | 2CCF008904R0001 | 0303359 | 0.5 | 1 |
| 50 | 3.8–5.8 | S502-K5,8 | 2CCF008905R0001 | 0303366 | 0.5 | 1 |
| 50 | 5.3–8 | S502-K8 | 2CCF008906R0001 | 0303373 | 0.5 | 1 |
| 50 | 7.3–11 | S502-K11 | 2CCF008907R0001 | 0303380 | 0.5 | 1 |
| 30 | 10–15 | S502-K15 | 2CCF008908R0001 | 0303397 | 0.5 | 1 |
| 30 | 14–20 | S502-K20 | 2CCF008909R0001 | 0303403 | 0.5 | 1 |
| 30 | 18–26 | S502-K26 | 2CCF008910R0001 | 0303410 | 0.5 | 1 |
| 30 | 23–32 | S502-K32 | 2CCF008911R0001 | 0303427 | 0.5 | 1 |
| 30 | 29–37 | S502-K37 | 2CCF008912R0001 | 0303434 | 0.5 | 1 |
| 30 | 34–41 | S502-K41 | 2CCF008913R0001 | 0303441 | 0.5 | 1 |
| 30 | 38–45 | S502-K45 | 2CCF008926R0001 | 0303458 | 0.5 | 1 |

S500-K Characteristic K

I_{cu} up to 50 kA; adjustable high performance MCB



2CCF012013F0001



| I_{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 50 | 0.1–0.15 | S503-K0,15 | 2CCF008932R0001 | 0303502 | 0.71 | 1 |
| 50 | 0.14–0.21 | S503-K0,21 | 2CCF008933R0001 | 0303519 | 0.71 | 1 |
| 50 | 0.2–0.3 | S503-K0,3 | 2CCF008934R0001 | 0303526 | 0.71 | 1 |
| 50 | 0.28–0.42 | S503-K0,42 | 2CCF008935R0001 | 0303533 | 0.71 | 1 |
| 50 | 0.38–0.58 | S503-K0,58 | 2CCF008936R0001 | 0303540 | 0.71 | 1 |
| 50 | 0.53–0.8 | S503-K0,8 | 2CCF008937R0001 | 0303557 | 0.71 | 1 |
| 50 | 0.73–1.1 | S503-K1,1 | 2CCF008938R0001 | 0303564 | 0.71 | 1 |
| 50 | 1–1.5 | S503-K1,5 | 2CCF008939R0001 | 0303571 | 0.71 | 1 |
| 50 | 1.4–2.1 | S503-K2,1 | 2CCF008940R0001 | 0303588 | 0.71 | 1 |
| 50 | 2–3 | S503-K3 | 2CCF008941R0001 | 0303595 | 0.71 | 1 |
| 50 | 2.8–4.2 | S503-K4,2 | 2CCF008942R0001 | 0303601 | 0.71 | 1 |
| 50 | 3.8–5.8 | S503-K5,8 | 2CCF008943R0001 | 0303618 | 0.71 | 1 |
| 50 | 5.3–8 | S503-K8 | 2CCF008944R0001 | 0303625 | 0.71 | 1 |
| 50 | 7.3–11 | S503-K11 | 2CCF008945R0001 | 0303632 | 0.71 | 1 |
| 30 | 10–15 | S503-K15 | 2CCF008946R0001 | 0303649 | 0.71 | 1 |
| 30 | 14–20 | S503-K20 | 2CCF008947R0001 | 0303656 | 0.71 | 1 |
| 30 | 18–26 | S503-K26 | 2CCF008948R0001 | 0303663 | 0.71 | 1 |
| 30 | 23–32 | S503-K32 | 2CCF008949R0001 | 0303670 | 0.71 | 1 |
| 30 | 29–37 | S503-K37 | 2CCF008950R0001 | 0303687 | 0.71 | 1 |
| 30 | 34–41 | S503-K41 | 2CCF008951R0001 | 0303694 | 0.71 | 1 |
| 30 | 38–45 | S503-K45 | 2CCF008964R0001 | 0303700 | 0.71 | 1 |

4-pole breaker on request

S500UC-K Characteristic K*

$I_{cu} = 30 \text{ kA}$; adjustable high performance MCB



2CC041200F0001



| I_{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 30 | 0.1–0.15 | S501UC-K0,15 | 2CCF008988R0001 | 0302000 | 0.25 | 1 |
| 30 | 0.14–0.21 | S501UC-K0,21 | 2CCF008991R0001 | 0302017 | 0.25 | 1 |
| 30 | 0.2–0.3 | S501UC-K0,30 | 2CCF008994R0001 | 0302024 | 0.25 | 1 |
| 30 | 0.28–0.42 | S501UC-K0,42 | 2CCF008997R0001 | 0302031 | 0.25 | 1 |
| 30 | 0.38–0.58 | S501UC-K0,58 | 2CCF009000R0001 | 0302048 | 0.25 | 1 |
| 30 | 0.53–0.8 | S501UC-K0,8 | 2CCF009003R0001 | 0302055 | 0.25 | 1 |
| 30 | 0.73–1.1 | S501UC-K1,1 | 2CCF009006R0001 | 0302062 | 0.25 | 1 |
| 30 | 1–1.5 | S501UC-K1,5 | 2CCF009009R0001 | 0302079 | 0.25 | 1 |
| 30 | 1.4–2.1 | S501UC-K2,1 | 2CCF009012R0001 | 0302086 | 0.25 | 1 |
| 30 | 2–3 | S501UC-K3 | 2CCF009015R0001 | 0302093 | 0.25 | 1 |
| 30 | 2.8–4.2 | S501UC-K4,2 | 2CCF009018R0001 | 0302109 | 0.25 | 1 |
| 30 | 3.8–5.8 | S501UC-K5,8 | 2CCF009021R0001 | 0302116 | 0.25 | 1 |
| 30 | 5.3–8 | S501UC-K8 | 2CCF009024R0001 | 0302123 | 0.25 | 1 |
| 30 | 7.3–11 | S501UC-K11 | 2CCF009027R0001 | 0302130 | 0.25 | 1 |
| 30 | 10–15 | S501UC-K15 | 2CCF009030R0001 | 0302147 | 0.25 | 1 |
| 30 | 14–20 | S501UC-K20 | 2CCF009033R0001 | 0302154 | 0.25 | 1 |
| 30 | 18–26 | S501UC-K26 | 2CCF009036R0001 | 0302161 | 0.25 | 1 |
| 30 | 23–32 | S501UC-K32 | 2CCF009039R0001 | 0302178 | 0.25 | 1 |
| 30 | 29–37 | S501UC-K37 | 2CCF009042R0001 | 0302185 | 0.25 | 1 |
| 30 | 34–41 | S501UC-K41 | 2CCF009045R0001 | 0302192 | 0.25 | 1 |
| 30 | 38–45 | S501UC-K45 | 2CCF009048R0001 | 0302208 | 0.25 | 1 |



2CC0412006F0001



| | | | | | | |
|----|-----------|--------------|-----------------|---------|-----|---|
| 30 | 0.1–0.15 | S502UC-K0,15 | 2CCF008989R0001 | 0302253 | 0.5 | 1 |
| 30 | 0.14–0.21 | S502UC-K0,21 | 2CCF008992R0001 | 0302260 | 0.5 | 1 |
| 30 | 0.2–0.3 | S502UC-K0,30 | 2CCF008995R0001 | 0302277 | 0.5 | 1 |
| 30 | 0.28–0.42 | S502UC-K0,42 | 2CCF008998R0001 | 0302284 | 0.5 | 1 |
| 30 | 0.38–0.58 | S502UC-K0,58 | 2CCF009001R0001 | 0302291 | 0.5 | 1 |
| 30 | 0.53–0.8 | S502UC-K0,8 | 2CCF009004R0001 | 0302307 | 0.5 | 1 |
| 30 | 0.73–1.1 | S502UC-K1,1 | 2CCF009007R0001 | 0302314 | 0.5 | 1 |
| 30 | 1–1.5 | S502UC-K1,5 | 2CCF009010R0001 | 0302321 | 0.5 | 1 |
| 30 | 1.4–2.1 | S502UC-K2,1 | 2CCF009013R0001 | 0302338 | 0.5 | 1 |
| 30 | 2–3 | S502UC-K3 | 2CCF009016R0001 | 0302345 | 0.5 | 1 |
| 30 | 2.8–4.2 | S502UC-K4,2 | 2CCF009019R0001 | 0302352 | 0.5 | 1 |
| 30 | 3.8–5.8 | S502UC-K5,8 | 2CCF009022R0001 | 0302369 | 0.5 | 1 |
| 30 | 5.3–8 | S502UC-K8 | 2CCF009025R0001 | 0302376 | 0.5 | 1 |
| 30 | 7.3–11 | S502UC-K11 | 2CCF009028R0001 | 0302383 | 0.5 | 1 |
| 30 | 10–15 | S502UC-K15 | 2CCF009031R0001 | 0302390 | 0.5 | 1 |
| 30 | 14–20 | S502UC-K20 | 2CCF009034R0001 | 0302406 | 0.5 | 1 |
| 30 | 18–26 | S502UC-K26 | 2CCF009037R0001 | 0302413 | 0.5 | 1 |
| 30 | 23–32 | S502UC-K32 | 2CCF009040R0001 | 0302420 | 0.5 | 1 |
| 30 | 29–37 | S502UC-K37 | 2CCF009043R0001 | 0302437 | 0.5 | 1 |
| 30 | 34–41 | S502UC-K41 | 2CCF009046R0001 | 0302444 | 0.5 | 1 |
| 30 | 38–45 | S502UC-K45 | 2CCF009049R0001 | 0302451 | 0.5 | 1 |

* for DC applications

S500UC-K Characteristic K*

$I_{cu} = 30 \text{ kA}$; adjustable high performance MCB



2CCCF012011F0001



| I_{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 30 | 0.1–0.15 | S503UC-K0,15 | 2CCF008990R0001 | 0302505 | 0.71 | 1 |
| 30 | 0.14–0.21 | S503UC-K0,21 | 2CCF008993R0001 | 0302512 | 0.71 | 1 |
| 30 | 0.2–0.3 | S503UC-K0,30 | 2CCF008996R0001 | 0302529 | 0.71 | 1 |
| 30 | 0.28–0.42 | S503UC-K0,42 | 2CCF008999R0001 | 0302536 | 0.71 | 1 |
| 30 | 0.38–0.58 | S503UC-K0,58 | 2CCF009002R0001 | 0302543 | 0.71 | 1 |
| 30 | 0.53–0.8 | S503UC-K0,8 | 2CCF009005R0001 | 0302550 | 0.71 | 1 |
| 30 | 0.73–1.1 | S503UC-K1,1 | 2CCF009008R0001 | 0302567 | 0.71 | 1 |
| 30 | 1–1.5 | S503UC-K1,5 | 2CCF009011R0001 | 0302574 | 0.71 | 1 |
| 30 | 1.4–2.1 | S503UC-K2,1 | 2CCF009014R0001 | 0302581 | 0.71 | 1 |
| 30 | 2–3 | S503UC-K3 | 2CCF009017R0001 | 0302598 | 0.71 | 1 |
| 30 | 2.8–4.2 | S503UC-K4,2 | 2CCF009020R0001 | 0302604 | 0.71 | 1 |
| 30 | 3.8–5.8 | S503UC-K5,8 | 2CCF009023R0001 | 0302611 | 0.71 | 1 |
| 30 | 5.3–8 | S503UC-K8 | 2CCF009026R0001 | 0302628 | 0.71 | 1 |
| 30 | 7.3–11 | S503UC-K11 | 2CCF009029R0001 | 0302635 | 0.71 | 1 |
| 30 | 10–15 | S503UC-K15 | 2CCF009032R0001 | 0302642 | 0.71 | 1 |
| 30 | 14–20 | S503UC-K20 | 2CCF009035R0001 | 0302659 | 0.71 | 1 |
| 30 | 18–26 | S503UC-K26 | 2CCF009038R0001 | 0302666 | 0.71 | 1 |
| 30 | 23–32 | S503UC-K32 | 2CCF009041R0001 | 0302673 | 0.71 | 1 |
| 30 | 29–37 | S503UC-K37 | 2CCF009044R0001 | 0302680 | 0.71 | 1 |
| 30 | 34–41 | S503UC-K41 | 2CCF009047R0001 | 0302697 | 0.71 | 1 |
| 30 | 38–45 | S503UC-K45 | 2CCF009050R0001 | 0302703 | 0.71 | 1 |



2CCCF012017F0001



| | | | | | | |
|----|-----------|--------------|-----------------|---------|------|---|
| 30 | 0.1–0.15 | S504UC-K0,15 | 2CCF011771R0001 | 0302758 | 0.92 | 1 |
| 30 | 0.14–0.21 | S504UC-K0,21 | 2CCF011772R0001 | 0302765 | 0.92 | 1 |
| 30 | 0.2–0.3 | S504UC-K0,3 | 2CCF011576R0001 | 0302772 | 0.92 | 1 |
| 30 | 0.28–0.42 | S504UC-K0,42 | 2CCF011773R0001 | 0302789 | 0.92 | 1 |
| 30 | 0.38–0.58 | S504UC-K0,58 | 2CCF011774R0001 | 0302796 | 0.92 | 1 |
| 30 | 0.53–0.8 | S504UC-K0,8 | 2CCF011775R0001 | 0302802 | 0.92 | 1 |
| 30 | 0.73–1.1 | S504UC-K1,1 | 2CCF011776R0001 | 0302819 | 0.92 | 1 |
| 30 | 1–1.5 | S504UC-K1,5 | 2CCF011777R0001 | 0302826 | 0.92 | 1 |
| 30 | 1.4–2.1 | S504UC-K2,1 | 2CCF011778R0001 | 0302833 | 0.92 | 1 |
| 30 | 2–3 | S504UC-K3 | 2CCF011779R0001 | 0302840 | 0.92 | 1 |
| 30 | 2.8–4.2 | S504UC-K4,2 | 2CCF011780R0001 | 0302857 | 0.92 | 1 |
| 30 | 3.8–5.8 | S504UC-K5,8 | 2CCF011781R0001 | 0302864 | 0.92 | 1 |
| 30 | 5.3–8 | S504UC-K8 | 2CCF011782R0001 | 0302871 | 0.92 | 1 |
| 30 | 7.3–11 | S504UC-K11 | 2CCF011509R0001 | 0302888 | 0.92 | 1 |
| 30 | 10–15 | S504UC-K15 | 2CCF011783R0001 | 0302895 | 0.92 | 1 |
| 30 | 14–20 | S504UC-K20 | 2CCF011784R0001 | 0302901 | 0.92 | 1 |
| 30 | 18–26 | S504UC-K26 | 2CCF011785R0001 | 0302918 | 0.92 | 1 |
| 30 | 23–32 | S504UC-K32 | 2CCF011786R0001 | 0302925 | 0.92 | 1 |
| 30 | 29–37 | S504UC-K37 | 2CCF011787R0001 | 0302932 | 0.92 | 1 |
| 30 | 34–41 | S504UC-K41 | 2CCF011788R0001 | 0302949 | 0.92 | 1 |
| 30 | 38–45 | S504UC-K45 | 2CCF011789R0001 | 0302956 | 0.92 | 1 |

* for DC applications

S500HV-K Characteristic K

$I_{cu} = 1,5 \text{ kA}$; for applications up to 1000 VAC



2CCCF012008F0001



| I_{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|------------------|----------------------------|----------------------------|------------------|--------------------|----------------|---------------|
| 1.5 | 1 | S501HV-K1 580V | 2CCCF017747R0001 | 0403454 | 0.25 | 1 |
| 1.5 | 3 | S501HV-K3 580V | 2CCCF015787R0001 | 0424160 | 0.25 | 1 |
| 1.5 | 4 | S501HV-K4 580V | 2CCCF015790R0001 | 0424184 | 0.25 | 1 |
| 1.5 | 6 | S501HV-K6 580V | 2CCCF015793R0001 | 0424214 | 0.25 | 1 |
| 1.5 | 8 | S501HV-K8 580V | 2CCCF015796R0001 | 0424245 | 0.25 | 1 |
| 1.5 | 10 | S501HV-K10 580V | 2CCCF015799R0001 | 0424276 | 0.25 | 1 |
| 1.5 | 13 | S501HV-K13 580V | 2CCCF015802R0001 | 0424306 | 0.25 | 1 |
| 1.5 | 16 | S501HV-K16 580V | 2CCCF015805R0001 | 0424337 | 0.25 | 1 |
| 1.5 | 20 | S501HV-K20 580V | 2CCCF015808R0001 | 0424368 | 0.25 | 1 |
| 1.5 | 25 | S501HV-K25 580V | 2CCCF015811R0001 | 0424399 | 0.25 | 1 |
| 1.5 | 32 | S501HV-K32 580V | 2CCCF015814R0001 | 0424429 | 0.25 | 1 |
| 1.5 | 40 | S501HV-K40 580V | 2CCCF015817R0001 | 0424450 | 0.25 | 1 |
| 1.5 | 45 | S501HV-K45 580V | 2CCCF015820R0001 | 0424481 | 0.25 | 1 |



2CCCF012008F0001



| | | | | | | |
|-----|----|------------------|------------------|---------|------|---|
| 1.5 | 1 | S502HV-K1 1000V | 2CCCF017961R0001 | 1407810 | 0.50 | 1 |
| 1.5 | 3 | S502HV-K3 1000V | 2CCCF015788R0001 | 0424177 | 0.50 | 1 |
| 1.5 | 4 | S502HV-K4 1000V | 2CCCF015791R0001 | 0424191 | 0.50 | 1 |
| 1.5 | 6 | S502HV-K6 1000V | 2CCCF015794R0001 | 0424221 | 0.50 | 1 |
| 1.5 | 8 | S502HV-K8 1000V | 2CCCF015797R0001 | 0424252 | 0.50 | 1 |
| 1.5 | 10 | S502HV-K10 1000V | 2CCCF015800R0001 | 0424283 | 0.50 | 1 |
| 1.5 | 13 | S502HV-K13 1000V | 2CCCF015803R0001 | 0424313 | 0.50 | 1 |
| 1.5 | 16 | S502HV-K16 1000V | 2CCCF015806R0001 | 0424344 | 0.50 | 1 |
| 1.5 | 20 | S502HV-K20 1000V | 2CCCF015809R0001 | 0424375 | 0.50 | 1 |
| 1.5 | 25 | S502HV-K25 1000V | 2CCCF015812R0001 | 0424405 | 0.50 | 1 |
| 1.5 | 32 | S502HV-K32 1000V | 2CCCF015815R0001 | 0424436 | 0.50 | 1 |
| 1.5 | 40 | S502HV-K40 1000V | 2CCCF015818R0001 | 0424467 | 0.50 | 1 |
| 1.5 | 45 | S502HV-K45 1000V | 2CCCF015821R0001 | 0424498 | 0.50 | 1 |



2CCCF012014F0001



| | | | | | | |
|-----|----|------------------|------------------|---------|------|---|
| 1.5 | 1 | S503HV-K1 1000V | 2CCCF017748R0001 | 0403461 | 0.71 | 1 |
| 1.5 | 3 | S503HV-K3 1000V | 2CCCF015827R0001 | 0500499 | 0.71 | 1 |
| 1.5 | 4 | S503HV-K4 1000V | 2CCCF015792R0001 | 0424207 | 0.71 | 1 |
| 1.5 | 6 | S503HV-K6 1000V | 2CCCF015795R0001 | 0424238 | 0.71 | 1 |
| 1.5 | 8 | S503HV-K8 1000V | 2CCCF015798R0001 | 0424269 | 0.71 | 1 |
| 1.5 | 10 | S503HV-K10 1000V | 2CCCF015801R0001 | 0424290 | 0.71 | 1 |
| 1.5 | 13 | S503HV-K13 1000V | 2CCCF015804R0001 | 0424320 | 0.71 | 1 |
| 1.5 | 16 | S503HV-K16 1000V | 2CCCF015807R0001 | 0424351 | 0.71 | 1 |
| 1.5 | 20 | S503HV-K20 1000V | 2CCCF015810R0001 | 0424382 | 0.71 | 1 |
| 1.5 | 25 | S503HV-K25 1000V | 2CCCF015813R0001 | 0424412 | 0.71 | 1 |
| 1.5 | 32 | S503HV-K32 1000V | 2CCCF015816R0001 | 0424443 | 0.71 | 1 |
| 1.5 | 40 | S503HV-K40 1000V | 2CCCF015819R0001 | 0424474 | 0.71 | 1 |
| 1.5 | 45 | S503HV-K45 1000V | 2CCCF015822R0001 | 0424504 | 0.71 | 1 |

S500X-AG1499

High magnetic release 16 ... 24 x I_n



2CC0412005R0001



| I _{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|-------------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 50 | 0.1–0.15 | S501X-AG1499-0,15 | 2CCF008773R0001 | 0577996 | 0.25 | 1 |
| 50 | 0.14–0.21 | S501X-AG1499-0,21 | 2CCF008774R0001 | 0577989 | 0.25 | 1 |
| 50 | 0.2–0.3 | S501X-AG1499-0,30 | 2CCF008775R0001 | 0577972 | 0.25 | 1 |
| 50 | 0.28–0.42 | S501X-AG1499-0,42 | 2CCF008776R0001 | 0577965 | 0.25 | 1 |
| 50 | 0.38–0.58 | S501X-AG1499-0,58 | 2CCF008777R0001 | 0577958 | 0.25 | 1 |
| 50 | 0.53–0.8 | S501X-AG1499-0,8 | 2CCF008778R0001 | 0577941 | 0.25 | 1 |
| 50 | 0.73–1.1 | S501X-AG1499-1,1 | 2CCF008779R0001 | 0577934 | 0.25 | 1 |
| 50 | 1–1.5 | S501X-AG1499-1,50 | 2CCF008780R0001 | 0577927 | 0.25 | 1 |
| 50 | 1.4–2.1 | S501X-AG1499-2,1 | 2CCF008781R0001 | 0577880 | 0.25 | 1 |
| 50 | 2–3 | S501X-AG1499-3 | 2CCF008782R0001 | 0577859 | 0.25 | 1 |
| 50 | 2.8–4.2 | S501X-AG1499-4,2 | 2CCF008783R0001 | 0577828 | 0.25 | 1 |
| 50 | 3.8–5.8 | S501X-AG1499-5,8 | 2CCF008784R0001 | 0577798 | 0.25 | 1 |
| 50 | 5.3–8 | S501X-AG1499-8 | 2CCF008785R0001 | 0577774 | 0.25 | 1 |
| 50 | 7.3–11 | S501X-AG1499-11 | 2CCF008786R0001 | 0577910 | 0.25 | 1 |
| 30 | 10–15 | S501X-AG1499-15 | 2CCF008787R0001 | 0577897 | 0.25 | 1 |
| 30 | 14–20 | S501X-AG1499-20 | 2CCF008788R0001 | 0577873 | 0.25 | 1 |
| 30 | 18–26 | S501X-AG1499-26 | 2CCF008789R0001 | 0577866 | 0.25 | 1 |
| 30 | 23–32 | S501X-AG1499-32 | 2CCF008790R0001 | 0577842 | 0.25 | 1 |
| 30 | 29–37 | S501X-AG1499-37 | 2CCF008791R0001 | 0577835 | 0.25 | 1 |
| 30 | 34–41 | S501X-AG1499-41 | 2CCF008792R0001 | 0577811 | 0.25 | 1 |
| 30 | 38–45 | S501X-AG1499-45 | 2CCF008793R0001 | 0577804 | 0.25 | 1 |



2CC0412010R0001



| | | | | | | |
|----|-----------|-------------------|-----------------|---------|-----|---|
| 50 | 0.1–0.15 | S502X-AG1499-0,15 | 2CCF008794R0001 | 0576722 | 0.5 | 1 |
| 50 | 0.14–0.21 | S502X-AG1499-0,21 | 2CCF008795R0001 | 0576715 | 0.5 | 1 |
| 50 | 0.2–0.3 | S502X-AG1499-0,30 | 2CCF008796R0001 | 0576708 | 0.5 | 1 |
| 50 | 0.28–0.42 | S502X-AG1499-0,42 | 2CCF008797R0001 | 0576692 | 0.5 | 1 |
| 50 | 0.38–0.58 | S502X-AG1499-0,58 | 2CCF008798R0001 | 0576685 | 0.5 | 1 |
| 50 | 0.53–0.8 | S502X-AG1499-0,8 | 2CCF008799R0001 | 0576678 | 0.5 | 1 |
| 50 | 0.73–1.1 | S502X-AG1499-1,1 | 2CCF008800R0001 | 0576661 | 0.5 | 1 |
| 50 | 1–1.5 | S502X-AG1499-1,5 | 2CCF008801R0001 | 0576654 | 0.5 | 1 |
| 50 | 1.4–2.1 | S502X-AG1499-2,1 | 2CCF008802R0001 | 0576623 | 0.5 | 1 |
| 50 | 2–3 | S502X-AG1499-3 | 2CCF008803R0001 | 0576593 | 0.5 | 1 |
| 50 | 2.8–4.2 | S502X-AG1499-4,2 | 2CCF008804R0001 | 0576562 | 0.5 | 1 |
| 50 | 3.8–5.8 | S502X-AG1499-5,8 | 2CCF008805R0001 | 0576531 | 0.5 | 1 |
| 50 | 5.3–8 | S502X-AG1499-8 | 2CCF008806R0001 | 0576524 | 0.5 | 1 |
| 50 | 7.3–11 | S502X-AG1499-11 | 2CCF008807R0001 | 0576647 | 0.5 | 1 |
| 30 | 10–15 | S502X-AG1499-15 | 2CCF008808R0001 | 0576630 | 0.5 | 1 |
| 30 | 14–20 | S502X-AG1499-20 | 2CCF008809R0001 | 0576616 | 0.5 | 1 |
| 30 | 18–26 | S502X-AG1499-26 | 2CCF008810R0001 | 0576609 | 0.5 | 1 |
| 30 | 23–32 | S502X-AG1499-32 | 2CCF008811R0001 | 0576586 | 0.5 | 1 |
| 30 | 29–37 | S502X-AG1499-37 | 2CCF008812R0001 | 0576579 | 0.5 | 1 |
| 30 | 34–41 | S502X-AG1499-41 | 2CCF008813R0001 | 0576555 | 0.5 | 1 |
| 30 | 38–45 | S502X-AG1499-45 | 2CCF008814R0001 | 0576548 | 0.5 | 1 |

S500X-AG1499

High magnetic release 16 ... 24 x I_n



20CC412016F0001



| I _{cu} [kA] | Range of adjustment [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|-------------------------|----------------------------|----------------------------|-----------------|--------------------|----------------|---------------|
| 50 | 0.1–0.15 | S503X-AG1499-0,15 | 2CCF008821R0001 | 0572311 | 0.71 | 1 |
| 50 | 0.14–0.21 | S503X-AG1499-0,21 | 2CCF008822R0001 | 0572304 | 0.71 | 1 |
| 50 | 0.2–0.3 | S503X-AG1499-0,30 | 2CCF008823R0001 | 0572298 | 0.71 | 1 |
| 50 | 0.28–0.42 | S503X-AG1499-0,42 | 2CCF008824R0001 | 0572281 | 0.71 | 1 |
| 50 | 0.38–0.58 | S503X-AG1499-0,58 | 2CCF008825R0001 | 0572274 | 0.71 | 1 |
| 50 | 0.53–0.8 | S503X-AG1499-0,8 | 2CCF008826R0001 | 0572267 | 0.71 | 1 |
| 50 | 0.73–1.1 | S503X-AG1499-1,1 | 2CCF008827R0001 | 0572250 | 0.71 | 1 |
| 50 | 1–1.5 | S503X-AG1499-1,5 | 2CCF008828R0001 | 0572243 | 0.71 | 1 |
| 50 | 1.4–2.1 | S503X-AG1499-2,1 | 2CCF008829R0001 | 0572205 | 0.71 | 1 |
| 50 | 2–3 | S503X-AG1499-3 | 2CCF008830R0001 | 0572175 | 0.71 | 1 |
| 50 | 2.8–4.2 | S503X-AG1499-4,2 | 2CCF008831R0001 | 0572144 | 0.71 | 1 |
| 50 | 3.8–5.8 | S503X-AG1499-5,8 | 2CCF008832R0001 | 0572113 | 0.71 | 1 |
| 50 | 5.3–8 | S503X-AG1499-8 | 2CCF008833R0001 | 0572106 | 0.71 | 1 |
| 50 | 7.3–11 | S503X-AG1499-11 | 2CCF008834R0001 | 0572236 | 0.71 | 1 |
| 30 | 10–15 | S503X-AG1499-15 | 2CCF008835R0001 | 0572212 | 0.71 | 1 |
| 30 | 14–20 | S503X-AG1499-20 | 2CCF008836R0001 | 0572199 | 0.71 | 1 |
| 30 | 18–26 | S503X-AG1499-26 | 2CCF008837R0001 | 0572182 | 0.71 | 1 |
| 30 | 23–32 | S503X-AG1499-32 | 2CCF008838R0001 | 0572168 | 0.71 | 1 |
| 30 | 29–37 | S503X-AG1499-37 | 2CCF008839R0001 | 0572151 | 0.71 | 1 |
| 30 | 34–41 | S503X-AG1499-41 | 2CCF008840R0001 | 0572137 | 0.71 | 1 |
| 30 | 38–45 | S503X-AG1499-45 | 2CCF008841R0001 | 0572120 | 0.71 | 1 |

S503X-AG0084

Magnetic release only (MO)



2CCCF012012R0001



| I_{cu} [kA] | Rated current [A] | Order details Type Code | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|--------------------------------------|------------------------------------|--|-------------------|----------------------------------|------------------------------|-----------------------------|
| 50 | 0.8 | S503X-AG0084-0.8 | 2CCF011613R0001 | 0500550 | 0.71 | 1 |
| 50 | 1.6 | S503X-AG0084-1.6 | 2CCF014894R0001 | 0303908 | 0.71 | 1 |
| 50 | 2.5 | S503X-AG0084-2.5 | 2CCF014895R0001 | 0303915 | 0.71 | 1 |
| 50 | 4 | S503X-AG0084-4 | 2CCF014896R0001 | 0303922 | 0.71 | 1 |
| 50 | 6 | S503X-AG0084-6 | 2CCF014897R0001 | 0303939 | 0.71 | 1 |
| 50 | 9 | S503X-AG0084-9 | 2CCF014898R0001 | 0303946 | 0.71 | 1 |
| 50 | 15 | S503X-AG0084-15 | 2CCF011532R0001 | 0500598 | 0.71 | 1 |
| 50 | 20 | S503X-AG0084-20 | 2CCF011614R0001 | 0303953 | 0.71 | 1 |
| 50 | 25 | S503X-AG0084-25 | 2CCF013067R0001 | 0500628 | 0.71 | 1 |
| 50 | 32 | S503X-AG0084-32 | 2CCF011535R0001 | 0303960 | 0.71 | 1 |
| 50 | 40 | S503X-AG0084-40 | 2CCF013061R0001 | 0303991 | 0.71 | 1 |
| 50 | 45 | S503X-AG0084-45 | 2CCF013068R0001 | 0500697 | 0.71 | 1 |
| 50 | 52 | S503X-AG0084-52 | 2CCF014963R0001 | 0303977 | 0.71 | 1 |
| 50 | 63 | S503X-AG0084-63 | 2CCF014541R0001 | 0303984 | 0.71 | 1 |

F500-K

Residual current protection with motor protection



20CC042500R0001

| I_{cu} | $I_{\Delta n}$ | U_e | Range of adjustment | Order details | Order code | GTIN EAN | Weight | Pack. |
|----------|----------------|-------|---------------------|----------------|-----------------|----------|--------|-------|
| [kA] | [mA] | [V] | [A] | Type Code | | 761227 | [kg] | unit |
| 50 | 30 | 400 | 0.53–0.8 | F503-K0,8/0,03 | 2CCF014995R0001 | 0501496 | 1.07 | 1 |
| 50 | 30 | 400 | 0.73–1.1 | F503-K1,1/0,03 | 2CCF014713R0001 | 0503087 | 1.07 | 1 |
| 50 | 30 | 400 | 1–1.5 | F503-K1,5/0,03 | 2CCF014714R0001 | 0304691 | 1.07 | 1 |
| 50 | 30 | 400 | 1.4–2.1 | F503-K2,1/0,03 | 2CCF014715R0001 | 0503155 | 1.07 | 1 |
| 50 | 30 | 400 | 2–3 | F503-K3/0,03 | 2CCF014716R0001 | 0503216 | 1.07 | 1 |
| 50 | 30 | 400 | 2.8–4.2 | F503-K4,2/0,03 | 2CCF014717R0001 | 0503261 | 1.07 | 1 |
| 50 | 30 | 400 | 3.8–5.8 | F503-K5,8/0,03 | 2CCF014718R0001 | 0503339 | 1.07 | 1 |
| 50 | 30 | 400 | 5.3–8 | F503-K8/0,03 | 2CCF014719R0001 | 0503360 | 1.07 | 1 |
| 50 | 30 | 400 | 7.3–11 | F503-K11/0,03 | 2CCF014720R0001 | 0304752 | 1.07 | 1 |
| 30 | 30 | 400 | 10–15 | F503-K15/0,03 | 2CCF014721R0001 | 0503131 | 1.07 | 1 |
| 30 | 30 | 400 | 14–20 | F503-K20/0,03 | 2CCF014722R0001 | 0503162 | 1.07 | 1 |
| 30 | 30 | 400 | 18–26 | F503-K26/0,03 | 2CCF014723R0001 | 0503186 | 1.07 | 1 |
| 30 | 30 | 400 | 23–32 | F503-K32/0,03 | 2CCF014724R0001 | 0503223 | 1.07 | 1 |
| 30 | 30 | 400 | 29–37 | F503-K37/0,03 | 2CCF014725R0001 | 0503230 | 1.07 | 1 |
| 30 | 30 | 400 | 34–41 | F503-K41/0,03 | 2CCF014726R0001 | 0503285 | 1.07 | 1 |
| 30 | 30 | 400 | 38–45 | F503-K45/0,03 | 2CCF014727R0001 | 0503308 | 1.07 | 1 |



20CC042500R0001

| | | | | | | | | |
|----|----|---------|-----------|-----------------|-----------------|---------|-----|---|
| 50 | 30 | 230/400 | 0.2–0.3 | F504-K0,3/0,03 | 2CCF016414R0001 | 0584697 | 1.4 | 1 |
| 50 | 30 | 230/400 | 0.28–0.42 | F504-K0,42/0,03 | 2CCF015466R0001 | 0502028 | 1.4 | 1 |
| 50 | 30 | 230/400 | 0.73–1.1 | F504-K1,1/0,03 | 2CCF010073R0001 | 0305131 | 1.4 | 1 |
| 50 | 30 | 230/400 | 1–1.5 | F504-K1,5/0,03 | 2CCF010075R0001 | 0305148 | 1.4 | 1 |
| 50 | 30 | 230/400 | 1.4–2.1 | F504-K2,1/0,03 | 2CCF010077R0001 | 0305155 | 1.4 | 1 |
| 50 | 30 | 230/400 | 2–3 | F504-K3/0,03 | 2CCF010079R0001 | 0305162 | 1.4 | 1 |
| 50 | 30 | 230/400 | 2.8–4.2 | F504-K4,2/0,03 | 2CCF010081R0001 | 0305179 | 1.4 | 1 |
| 50 | 30 | 230/400 | 3.8–5.8 | F504-K5,8/0,03 | 2CCF010083R0001 | 0305186 | 1.4 | 1 |
| 50 | 30 | 230/400 | 5.3–8 | F504-K8/0,03 | 2CCF010085R0001 | 0305193 | 1.4 | 1 |
| 50 | 30 | 230/400 | 7.3–11 | F504-K11/0,03 | 2CCF010087R0001 | 0305209 | 1.4 | 1 |
| 30 | 30 | 230/400 | 10–15 | F504-K15/0,03 | 2CCF010089R0001 | 0305216 | 1.4 | 1 |
| 30 | 30 | 230/400 | 14–20 | F504-K20/0,03 | 2CCF010091R0001 | 0305223 | 1.4 | 1 |
| 30 | 30 | 230/400 | 18–26 | F504-K26/0,03 | 2CCF010093R0001 | 0305230 | 1.4 | 1 |
| 30 | 30 | 230/400 | 23–32 | F504-K32/0,03 | 2CCF010095R0001 | 0305247 | 1.4 | 1 |
| 30 | 30 | 230/400 | 29–37 | F504-K37/0,03 | 2CCF010097R0001 | 0305254 | 1.4 | 1 |
| 30 | 30 | 230/400 | 34–41 | F504-K41/0,03 | 2CCF010099R0001 | 0305261 | 1.4 | 1 |
| 30 | 30 | 230/400 | 38–45 | F504-K45/0,03 | 2CCF010101R0001 | 0305278 | 1.4 | 1 |

Accessory

Fitted by the customer



| | Order details designation | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|--------------------------|---------------------------|-----------------|-----------------|-------------|------------|
| Auxiliary contact | | | | | |
| 1 NO and 1 NC contact | S500-H11 | 2CCF008681R0001 | 0305506 | 0.06 | 1 |
| 2 NO contacts | S500-H20 | 2CCF008682R0001 | 0305513 | 0.06 | 1 |

| | | | | | |
|-----------------------|----------|-----------------|---------|------|---|
| Signal contact | | | | | |
| 1 NO and 1 NC contact | S500-S11 | 2CCF008684R0001 | 0305537 | 0.06 | 1 |
| 2 NO contacts | S500-S20 | 2CCF008685R0001 | 0305544 | 0.06 | 1 |

| | | | | | |
|--------------------------------------|----------|-----------------|---------|------|---|
| Rotary drive for 6mm spindles | | | | | |
| for 1- to 3-pole circuit breaker | S500-RD3 | 2CCF014218R0001 | 0306008 | 0.08 | 1 |
| for 4- to 6-pole circuit breaker | S500-RD4 | 2CCF014219R0001 | 0306015 | 0.08 | 1 |

| | | | | | |
|---------------------------------------|-----------|-----------------|---------|------|---|
| Rotary drive for door mounting | | | | | |
| Front plate and switch handle black | S500-H2B1 | 2CCF014207R0001 | 0306046 | 0.07 | 1 |
| Front plate yellow, switch handle red | S500-H2Y1 | 2CCF014208R0001 | 0306053 | 0.07 | 1 |

| | | | | | |
|---|-----------|-----------------|---------|------|---|
| Rotary drive for door mounting – lockable in OFF-position, door interlock in ON-position | | | | | |
| Front plate and switch handle black | S500-H2B1 | 2CCF014207R0001 | 0306046 | 0.07 | 1 |
| Front plate yellow, switch handle red | S500-H2Y1 | 2CCF014208R0001 | 0306053 | 0.07 | 1 |

| | | | | | |
|---|-----------|-----------------|---------|------|---|
| Rotary handle for door mounting – door opening possible in ON-position | | | | | |
| Front plate and switch handle black | S500-H2B2 | 2CCF014209R0001 | 0306060 | 0.07 | 1 |
| Front plate yellow, switch handle red | S500-H2Y2 | 2CCF014210R0001 | 0306077 | 0.07 | 1 |

| | | | | | |
|---|----------|-----------------|---------|------|---|
| Pistol grip for door mounting | | | | | |
| Black handle | S500-H8B | 2CCF014215R0001 | 0306084 | 0.14 | 1 |
| Lower part of handle yellow, handle red | S500-H8Y | 2CCF014216R0001 | 0306091 | 0.14 | 1 |

| | | | | | |
|-------------------|-----------|-----------------|---------|------|---|
| Name-plate | | | | | |
| black | S500-HP2B | 2CCF014211R0001 | 0306169 | 0.01 | 1 |
| yellow | S500-HP2Y | 2CCF014212R0001 | 0306176 | 0.01 | 1 |

Accessory

Fitted by the customer

6



2CCC413066F0001

| | Order details designation | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|-----------------------|---------------------------|-----------------|-----------------|-------------|------------|
| Locking device | | | | | |
| Locking device | S500-SA | 2CCF008696R0001 | 0305889 | 0.02 | 10 |



2CCC425005F0001

| | Order details designation | Order code | GTIN EAN | Weight [kg] | Pack. unit |
|----------------------------------|---------------------------|-----------------|----------|-------------|------------|
| Spindle for rotary handle | | | | | |
| length 85 mm / Ø 6 mm | S500-S51 | 2CCF014213R0001 | 0306114 | 0.02 | 1 |
| length 180 mm / Ø 6 mm | S500-S52 | 2CCF014214R0001 | 0306121 | 0.03 | 1 |



2CCC425006F0001

| | Order details designation | Order code | GTIN EAN | Weight [kg] | Pack. unit |
|--------------------------------|---------------------------|-----------------|----------|-------------|------------|
| Spindle for pistol grip | | | | | |
| length 265 mm / Ø 6 mm | S500-S56 | 2CCF014217R0001 | 0306138 | 0.05 | 1 |



2CCC425017F0001

S500-AK20

| | Order details designation | Order code | GTIN EAN | Weight [kg] | Pack. unit |
|--|---------------------------|-----------------|----------|-------------|------------|
| Busbar terminal for vertical pole conductor | | | | | |
| Busbar terminal for single-phase busbar system | S500-AK50 | 2CCF014288R0001 | 0403652 | 0.04 | 10 |
| Busbar terminal | S500-AK20 | 2CCF011865R0001 | 0403560 | 0.01 | 10 |



2CCC425018F0001



2CCC425019F0001

| | Order details designation | Order code | GTIN EAN | Weight [kg] | Pack. unit |
|--|---------------------------|-----------------|----------|-------------|------------|
| Busbar terminal for three-phase busbar system | | | | | |
| L1 | S500-L1 | 2CCF011866R0001 | 0403577 | 0.03 | 10 |
| L2 | S500-L2 | 2CCF011867R0001 | 0403584 | 0.03 | 10 |
| L3 | S500-L3 | 2CCF011868R0001 | 0403591 | 0.03 | 10 |
| N | S500-N | 2CCF011869R0001 | 0403607 | 0.03 | 10 |
| NA | S500-NA | 2CCF014308R0001 | 0403669 | 0.02 | 10 |



2CCC425012F0001

| | Order details designation | Order code | GTIN EAN | Weight [kg] | Pack. unit |
|--|---------------------------|-----------------|----------|-------------|------------|
| Insulated terminal for rear connection of main contacts | | | | | |
| Terminal, insulated | S500-K1 | 2CCF008695R0001 | 0403515 | 0.01 | 10 |



2CCC4231020F0001

| | Order details designation | Order code | GTIN EAN 761227 | Weight [kg] | Pack. unit |
|---|---------------------------|-----------------|-----------------|-------------|------------|
| Busbar | | | | | |
| 8 x 2-pole breakers, length 390 mm | S500-BB28 | 2CCF016207R0001 | 0503681 | 1.59 | 1 |
| 8 x 3-pole breakers, length 590 mm | S500-BB38 | 2CCF016209R0001 | 0503704 | 2.91 | 1 |
| 13 x 3-pole breakers, length 965 mm (maximal) | S500-BB313 | 2CCF016858R0001 | 0510443 | 3.6 | 1 |
| 4 x 4-pole breakers, length 390 mm | S500-BB44 | 2CCF016676R0001 | 0510436 | 2.26 | 1 |



2CC0465010F0001

End cap

| | | | | | |
|---------|---------|-----------------|---------|------|----|
| End cap | S500-EK | 2CCF016681R0001 | 0400484 | 0.02 | 10 |
|---------|---------|-----------------|---------|------|----|



2CCC425015F0001

Line terminal, insulated

| | | | | | |
|----------------------------------|---------|-----------------|---------|------|---|
| Line terminal 70 mm ² | S500-K2 | 2CCF016210R0001 | 0503711 | 0.03 | 1 |
| Line terminal 95 mm ² | S500-K3 | 2CCF016677R0001 | 0510467 | 0.07 | 1 |



2CCC425011F0001

Flush-mounting

| | | | | | |
|------------------------|----------|-----------------|---------|------|---|
| Insertion width 38 mm | S500-ME1 | 2CCF008692R0001 | 0305902 | 0.08 | 1 |
| Insertion width 68 mm | S500-ME2 | 2CCF008693R0001 | 0305919 | 0.10 | 1 |
| Insertion width 184 mm | S500-ME3 | 2CCF008694R0001 | 0305926 | 0.14 | 1 |

S500-ME1



2CCC425004F0001

Terminal cover

| | | | | | |
|----------------|---------|-----------------|---------|------|----|
| Terminal cover | S500-A1 | 2CCF013615R0001 | 0403638 | 0.00 | 10 |
|----------------|---------|-----------------|---------|------|----|



2CCC425021F0001



2CCC425022F0001

Intermediate piece

| | | | | | |
|----------------------------|---------|-----------------|---------|------|----|
| Intermediate piece 12.5 mm | S500-F1 | 2CCF014309R0001 | 0403676 | 0.02 | 10 |
| Intermediate piece 6 mm | S500-F2 | 2CCF016211R0001 | 0403683 | 0.01 | 10 |

Accessory Factory fitted



6



| | Order details | Weight [kg] | Pack. unit |
|---|-----------------|-------------|------------|
| Switched neutral NA | ... - NA | 0.21 | 10 |
| Separating neutral N | ... - N | 0.07 | 10 |
| Undervoltage release UA | ... + UA 12VAC | 0.16 | 1 |
| | ... + UA 24VAC | 0.16 | 1 |
| | ... + UA 36VAC | 0.16 | 1 |
| | ... + UA 48VAC | 0.16 | 1 |
| | ... + UA 110VAC | 0.16 | 1 |
| | ... + UA 230VAC | 0.16 | 1 |
| | ... + UA 400VAC | 0.16 | 1 |
| | ... + UA 500VAC | 0.16 | 1 |
| | ... + UA 12VDC | 0.16 | 1 |
| | ... + UA 24VDC | 0.16 | 1 |
| | ... + UA 36VDC | 0.16 | 1 |
| | ... + UA 48VDC | 0.16 | 1 |
| | ... + UA 110VDC | 0.16 | 1 |
| | ... + UA 230VDC | 0.16 | 1 |
| | ... + UA 400VDC | 0.16 | 1 |
| | ... + UA 500VDC | 0.16 | 1 |
| Shunt release AL | ... + AL 12V | 0.17 | 1 |
| (for AC- and DC-applications) | ... + AL 24V | 0.17 | 1 |
| | ... + AL 36V | 0.17 | 1 |
| | ... + AL 48V | 0.17 | 1 |
| | ... + AL 110V | 0.17 | 1 |
| | ... + AL 230V | 0.17 | 1 |
| | ... + AL 400V | 0.17 | 1 |
| RCD release signal contact T10 (1 NC) | T10 | 0.25 | 1 |

Table of content S500

Properties of main devices S500

| | |
|--------------------------------|-----|
| Characteristics | 7/2 |
| Special features of S500 | 7/5 |
| Special features of F500 | 7/9 |

| | |
|--------------------------------------|------|
| Properties of S500 accessories | 7/13 |
|--------------------------------------|------|

High Performance MCB S500

Characteristics of the adjustable and fixed breakers

Characteristics



Tripping characteristic K

Thermal tripping
 $1.05 \dots 1.20 \times I_n$
 Electromagnetic tripping
 $< 0,21 \quad 8 \dots 10 \times I_n \text{ AC}$
 $< 0,42 \quad 10 \dots 12 \times I_n \text{ AC}$
 $> 0,42 \quad 12 \dots 14 \times I_n \text{ AC}$
 Calibration temperature 40°C

As miniature circuit breaker for the protection of single-phase and three-phase motors. For use in fuseless motor control centers (MCC). As circuit breaker with adjustable rated residual operating current, e. g. for transformers.

Tripping characteristic UC-K

Thermal tripping
 $1.05 \dots 1.20 \times I_n \text{ (DC)}$
 Electromagnetic tripping
 $< 0,21 \quad 8 \dots 10 \times I_n \text{ DC}$
 $< 0,42 \quad 10 \dots 12 \times I_n \text{ DC}$
 $> 0,42 \quad 12 \dots 14 \times I_n \text{ DC}$
 Calibration temperature 40°C

As miniature circuit breaker for circuits and consumers in DC networks and DC driven vehicles. With adjustable rated residual operating current.




Tripping characteristic HV-K

Thermal tripping
 $1.05 \dots 1.20 \times I_n$
 Electromagnetic tripping
 $12 \dots 14 \times I_n \text{ AC}$
 Calibration temperature 40°C

As miniature circuit breaker for applications with a rated insulation voltage up to 1000 VAC and/or high ambient temperatures (light systems, mining, tunnelling)

7

Tripping characteristics

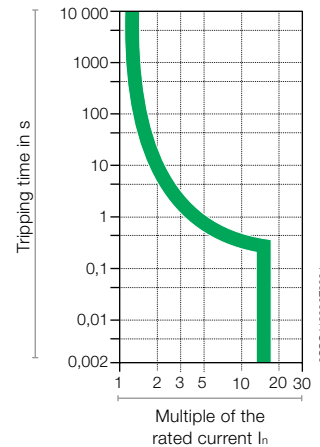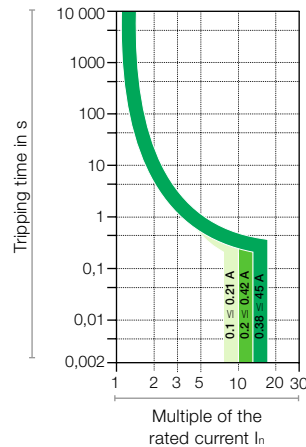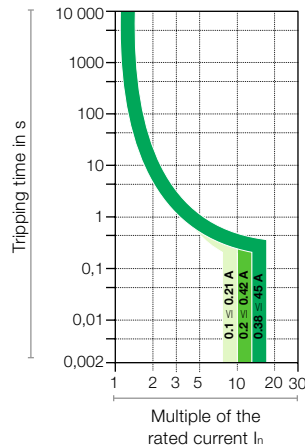

Tripping behaviour compliant to IEC 60947-2

| Characteristic | Currents | Thermal tripping | | Electromagnetic tripping | | |
|----------------|------------|--------------------|--------------------|--------------------------|------------------------------|------------------------------|
| | | Small test current | Large test current | Currents | Small test current | Large test current |
| K | 0,1 ... 45 | $1,05 \times I_n$ | $1,20 \times I_n$ | $< 0,21$ | $8 \times I_n$ | $10 \times I_n$ |
| | | | | $< 0,42$ | $10 \times I_n$ | $12 \times I_n$ |
| | | | | $> 0,42$ | $12 \times I_n$ | $14 \times I_n$ |
| UC-K | 0,1 ... 45 | $1,05 \times I_n$ | $1,20 \times I_n$ | $< 0,21$ | $8 \times I_n \text{ (DC)}$ | $10 \times I_n \text{ (DC)}$ |
| | | | | $< 0,42$ | $10 \times I_n \text{ (DC)}$ | $12 \times I_n \text{ (DC)}$ |
| | | | | $> 0,42$ | $12 \times I_n \text{ (DC)}$ | $14 \times I_n \text{ (DC)}$ |
| HV-K | 1 ... 45 | $1,05 \times I_n$ | $1,20 \times I_n$ | - | $12 \times I_n$ | $14 \times I_n$ |

High Performance MCB S500 Characteristics of the F500-K

Characteristics



20CC41201F0001

Tripping characteristic K

Thermal tripping

1.05 ... 1.20 x I_n

Electromagnetic tripping

< 0,21 8 ... 10 x I_n AC

< 0,42 10 ... 12 x I_n AC

> 0,42 12 ... 14 x I_n AC


Calibration temperature 40°C

Combination circuit breaker with motor protection characteristic and integral residual current protection with I_n = 30 and 300 mA

The high performance miniature circuit breaker F500 protects against the effects of:

- Overload and short-circuits
- Dangerous residual currents
- Direct contact with an active conductor

Tripping characteristics

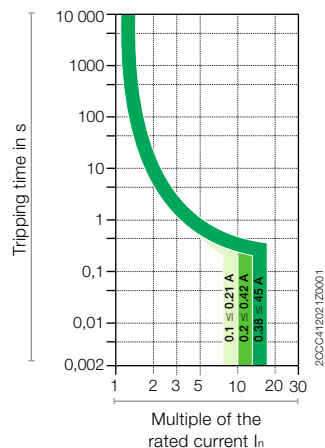

20CC412021Z0001

Tripping behaviour compliant to IEC 60947-2

| Characteristic | Currents | Thermal tripping | | Electromagnetic tripping | | |
|----------------|------------|-----------------------|-----------------------|--------------------------|---------------------|---------------------|
| | | Small test current | Large test current | Currents | Small test current | Large test current |
| K | 0,1 ... 45 | 1,05 x I _n | 1,20 x I _n | < 0,21 | 8 x I _n | 10 x I _n |
| | | | | < 0,42 | 10 x I _n | 12 x I _n |
| | | | | > 0,42 | 12 x I _n | 14 x I _n |

High Performance MCB S500 Characteristics of the X-breaker

Characteristics

X-AG1499



X-AG0084



Tripping characteristic X-AG1499

Thermal tripping
 $1.05 \dots 1.26 \times I_n$
 Electromagnetic tripping
 $16 \dots 24 \times I_n \text{ AC}$
 Calibration temperature 40°C

As miniature circuit breaker for high current peaks, e. g. by transformers or condenser batteries. With adjustable rated residual operating current.

Tripping characteristic X-AG0084

Electromagnetic tripping
 $12.5 \dots 15 \times I_n \text{ AC}$

As circuit breaker developed for high short circuit currents, e. g. by substation distributors or fuseless motor-control-centres (MCC). The breaker dispose of electromagnetic release and thus insensible against temperature fluctuation.

7

Tripping behaviour compliant to IEC 60947-2

| Characteristic | Currents | Thermal tripping | | Currents | Electromagnetic tripping | |
|----------------|------------|--------------------|--------------------|------------|--------------------------|--------------------|
| | | Small test current | Large test current | | Small test current | Large test current |
| X-AG1499 | 0,1 ... 45 | $1,05 \times I_n$ | $1,26 \times I_n$ | 0,1 ... 45 | $16 \times I_n$ | $24 \times I_n$ |
| X-AG0084 | 0,8 ... 63 | — | — | — | $12,5 \times I_n$ | $15 \times I_n$ |

Properties

Special features of S500

The high performance MCB S500 – long established

It adds adjustability (among other things) to the S800 range: The S500-K and S500UC-K devices provide the option of infinitely adjusting the rated tripping current. This has the benefit of a very precise tripping operation.

The fixed-setting S500HV-K provides the best solution for applications up to 1000V AC.

For special applications, there is the S500X, which can be configured completely in accordance with the customer's requirements.

The S500X-AG0084 has a fixed setting and is predominantly used for motor protection with separate overload protection.

The S500X-AG1499 can be adjusted; due to its delayed tripping, it is mainly used to protect transformers.

S500-K: Motor protection

The S500-K may be used up to a current rating of 11 A for direct operational switching of motors.

The motor starting time should not be longer than 2,5 seconds to avoid nuisance tripping when motor starting is repeated in quick succession.



2000412009F0001

- Convincing:** Approved according to UL1077
- Safe:** Optimum coordination with A-contactors
- Loads:** Adjustable range from 0,1 to 45 A
- Checked:** Up to 50 kA rated ultimate short-circuit breaking capacity I_{cu}
- Selectable:** Available as 1- to 4-pole breakers
- Compact:** Minimal dimension
- Flexible:** Wide range of accessories

Coordination table for S500-K motor starter to IEC 60947-4-1, type 2, for 415 VAC, 50 kA

| Motor Rated output P_e [kW] | Rated current I_n [A] | High performance MCB | | | Contactor Type | Safety clearance [mm] | Cable Cross section mm ² | Starter group I_{max} [A] |
|--|-------------------------------|----------------------|-------------------------------------|---|-------------------|-----------------------------|---|--------------------------------|
| | | Type | Range of adjustment I_n [A] | Magnetic release ($\pm 10\%$) I_m [A] | | | | |
| 0.12 | 0.44 | S503-K0,58 | 0.38–0.58 | 7 | A9-30-10 | 20 | 1.5 | 0.58 |
| 0.18 | 0.72 | S503-K0,8 | 0.53–0.8 | 10 | A9-30-10 | 20 | 1.5 | 0.8 |
| 0.25 | 0.83 | S503-K1,1 | 0.73–1.1 | 13 | A9-30-10 | 20 | 1.5 | 1.1 |
| 0.37 | 1.12 | S503-K1,5 | 1–1.5 | 18 | A9-30-10 | 20 | 1.5 | 1.5 |
| 0.5 | 1.45 | S503-K2,1 | 1.4–2.1 | 25 | A9-30-10 | 20 | 1.5 | 2.1 |
| 0.75 | 1.9 | S503-K2,1 | 1.4–2.1 | 25 | A9-30-10 | 20 | 1.5 | 2.1 |
| 1.1 | 2.59 | S503-K3 | 2–3 | 36 | A12-30-10 | 20 | 1.5 | 3 |
| 1.5 | 3.45 | S503-K4,2 | 2.8–4.2 | 50 | A12-30-10 | 20 | 1.5 | 4.2 |
| 1.85 | 4.4 | S503-K5,8 | 3.8–5.8 | 69 | A16-30-10 | 20 | 1.5 | 5.8 |
| 2.2 | 4.8 | S503-K5,8 | 3.8–5.8 | 69 | A16-30-10 | 20 | 1.5 | 5.8 |
| 3 | 6.48 | S503-K8 | 5.3–8 | 96 | A16-30-10 | 20 | 1.5 | 8 |
| 4 | 8.6 | S503-K11 | 7.3–11 | 132 | A26-30-10 | 35 | 1.5 | 11 |
| 5.5 | 11.1 | S503-K15 | 10–15 | 180 | A26-30-10 | 35 | 1.5 | 15 |
| 7.5 | 14.8 | S503-K20 | 14–20 | 240 | A26-30-10 | 35 | 1.5 | 20 |
| 11 | 21.5 | S503-K26 | 18–26 | 312 | A26-30-10 | 35 | 2.5 | 26 |
| 15 | 28.5 | S503-K32 | 28–32 | 384 | A30-30-10 | 35 | 6 | 32 |
| 18.5 | 35 | S503-K37 | 29–37 | 444 | A40-30-10 | 35 | 6 | 37 |
| 22 | 41 | S503-K45 | 38–45 | 540 | A50-30-00 | 35 | 10 | 45 |

Properties

Special features of S500



20CC0412001F0001


S500UC-K: DC circuit protection

The S500UC-K is intended for DC applications. Voltages up to 250VDC per pole can be switched with time constants ≤ 15 ms. Higher voltages up to 750VDC are switched by series connection (polarity-independent).

- Convincing:** Approved according to UL1077
- Safe:** Independent polarity connection
- Loads:** Range of adjustment from 0,1 to 45 A
- Checked:** Up to 30 kA rated ultimate short-circuit breaking capacity I_{cu}
- Selectable:** Available as 1- to 4-pole breaker
- Compact:** Smallest sizes
- Flexible:** Wide range of accessories

S500UC-K: Up to 250 VDC each pole

The S500UC-K is only for DC applications.

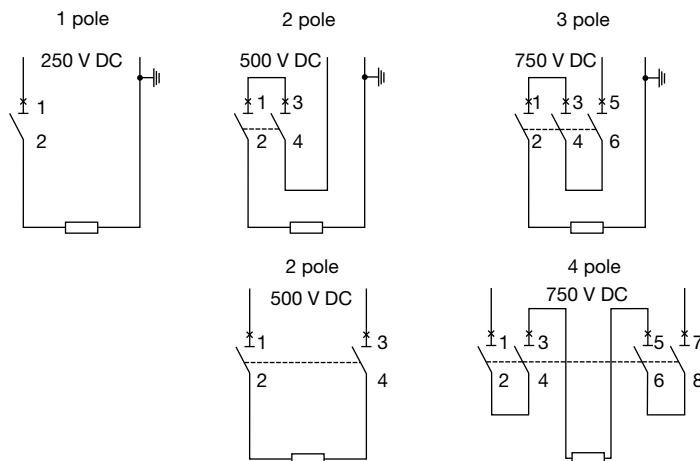

Z100040eps

7 Earthed network

Unearthed network



20CC0412003F0001

S500HV-K: For applications up to 1000 VAC

The S500HV has a fixed rated current. It is used as high performance MCB for applications up to 1000VAC – from the mining industry excess the power distribution up to tunnelling. Between two S500HV-K (1, 2 or 3 poles) or a S500HV-K and a conductive part, the 12,5mm separating barrier S500-F1 must be installed. The separating barrier must be ordered separately.

- Convincing:** Can be used up to 1000VAC
- Safe:** Reliable for high ambient temperatures
- Loads:** Available from 1 to 45 A
- Checked:** Up to 1,5kA rated ultimate short-circuit breaking capacity I_{cu}
- Selectable:** Available as 1- to 3-pole breaker
- Compact:** Smallest sizes
- Flexible:** Wide range of accessories

S500X: Customized circuit breaker

The S500X is a customized breaker and suitable for special applications.

Following adjustments can be conducted:

- Special ambient temperature
- Special trip characteristics through adaptation of thermal and/or electromagnetic release
- Calibration of intermediate values

The marking of S500X varies in the identification number, characterized by 2 letters and 4 digits.

- Convincing:** Customized breaker
- Safe:** Available with fixed or adjustable rated current
- Loads:** Available with max. 63 A
- Checked:** Up to 50 kA rated ultimate short-circuit breaking capacity I_{cu}
- Compact:** Smallest sizes
- Flexible:** Wide range of accessories

| Fixed version Rated current [A] | Adjustable version Range of adjustment [A] |
|------------------------------------|---|
| 6 | 0.1–0.15 |
| 10 | 0.14–0.21 |
| 13 | 0.2–0.3 |
| 16 | 0.28–0.42 |
| 20 | 0.53–0.8 |
| 25 | 0.73–1.1 |
| 32 | 1–1.5 |
| 40 | 1.4–2.1 |
| 50 | 2–3 |
| 63 | 2.8–4.2 |
| | 3.8–5.8 |
| | 5.3–8 |
| | 7.3–11 |
| | 10–15 |
| | 14–20 |
| | 18–26 |
| | 23–32 |
| | 29–37 |
| | 34–41 |
| | 38–45 |



20004120/05F0001

S500X-AG1499: Protection of transformers

The S500X-AG1499 is prevailing used to protect transformers. The late magnetic release and the high rated ultimate short-circuit breaking capacity of up to 50 kA makes this breaker unique.

- Convincing:** Can be used up to 690 VAC
- Safe:** Magnetic release is between 16 to 21 x I_n
- Loads:** Available from 1,6 to 63 A
- Checked:** Up to 50 kA rated ultimate short-circuit breaking capacity I_{cu}
- Compact:** Smallest sizes
- Flexible:** Wide range of accessories

Properties

Special features of S500



2000412012F0001

S503X-AG0084: Motor protection up to 50 kA

The S503X-AG0084 is suitable for high short-circuit currents with an rated ultimate short-circuit breaking capacity up to 50 kA.

- Convincing:** Can be used up to 690 VAC
- Safe:** Possesses only an electromagnetic release
- Loads:** Available from 0.8 to 63 A
- Checked:** Up to 50 kA rated ultimate short-circuit breaking capacity I_{cu}
- Compact:** Smallest sizes
- Flexible:** Wide range of accessories

Coordination table S503X-AG0084 to IEC 60947-4-1, type 2, for 400 VAC, 65 kA with A-conductor and thermal overload relay

| Motor Rated output P_e [kW] | Rated current I_n [A] | High performance MCB | | | Contactor | | Thermal overload relay | | Cable Cross section [mm ²] | Starter group I_{max} [A] |
|--|-------------------------------|----------------------|-------------------------------|---|-----------|-----------------------------|------------------------|-------------------------------|---|-----------------------------------|
| | | Type | Rated current I_n [A] | Magnetic release ($\pm 10\%$) I_m [A] | Type | Safety clearance [mm] | Type | Range of adjustment [A] | | |
| 0.12 | 0.44 | S503X-AG0084 | 1.6 | 22 | A9-30-10 | 20 | TA25 DU 0.63 | 0.4–0.63 | 1.5 | 0.63 |
| 0.18 | 0.60 | S503X-AG0084 | 1.6 | 22 | A9-30-10 | 20 | TA25 DU 1.00 | 0.63–1 | 1.5 | 1 |
| 0.25 | 0.85 | S503X-AG0084 | 1.6 | 22 | A9-30-10 | 20 | TA25 DU 1.00 | 0.63–1 | 1.5 | 1 |
| 0.37 | 1.10 | S503X-AG0084 | 1.6 | 22 | A9-30-10 | 20 | TA25 DU 1.4 | 1–1.4 | 1.5 | 1.4 |
| 0.55 | 1.15 | S503X-AG0084 | 2.5 | 34 | A9-30-10 | 20 | TA25 DU 1.8 | 1.3–1.8 | 1.5 | 1.8 |
| 0.75 | 1.9 | S503X-AG0084 | 2.5 | 34 | A9-30-10 | 20 | TA25 DU 2.4 | 1.7–2.4 | 1.5 | 2.4 |
| 1.1 | 2.70 | S503X-AG0084 | 4.0 | 55 | A9-30-10 | 20 | TA25 DU 3.1 | 2.2–3.1 | 1.5 | 3.1 |
| 1.5 | 3.60 | S503X-AG0084 | 6.0 | 83 | A9-30-10 | 20 | TA25 DU 4 | 2.8–4 | 1.5 | 4 |
| 2.2 | 4.90 | S503X-AG0084 | 6.0 | 83 | A12-30-10 | 20 | TA25 DU 6.5 | 4.5–6.5 | 1.5 | 6.5 |
| 3 | 6.50 | S503X-AG0084 | 9.0 | 124 | A12-30-10 | 20 | TA25 DU 8.5 | 6–8.5 | 1.5 | 8.5 |
| 4 | 8.50 | S503X-AG0084 | 20.0 | 275 | A16-30-10 | 35 | TA25 DU 11 | 7.5–11 | 1.5 | 11 |
| 5.5 | 11.50 | S503X-AG0084 | 20.0 | 275 | A16-30-10 | 35 | TA25 DU 14 | 10–14 | 1.5 | 14 |
| 7.5 | 15.50 | S503X-AG0084 | 20.0 | 275 | A26-30-11 | 35 | TA25 DU 19 | 13–19 | 1.5 | 19 |
| 11 | 22 | S503X-AG0084 | 32.0 | 440 | A20-30-10 | 35 | TA25 DU 25 | 18–25 | 2.5 | 25 |
| 11 | 22 | S503X-AG0084 | 32.0 | 440 | A26-30-10 | 35 | TA25 DU 25 | 18–25 | 4 | 25 |
| 15 | 29 | S503X-AG0084 | 32.0 | 440 | A30-30-10 | 35 | TA25 DU 32 | 24–32 | 6 | 32 |
| 18.5 | 35 | S503X-AG0084 | 52.0 | 715 | A40-30-10 | 35 | TA25 DU 42 | 29–42 | 6 | 42 |
| 22 | 41 | S503X-AG0084 | 63.0 | 865 | A50-30-00 | 35 | TA25 DU 52 | 36–52 | 10 | 52 |

Maximum cable lengths for protection against indirect contact (earth leakage current) to IEC 364-4-41

| High performance MCB Type | Rated current I_n [A] | Magnetic release ($\pm 10\%$) I_m [A] | Maximum permissible cable lengths and cross-sections | | | | |
|------------------------------|----------------------------|--|--|-------------------------------|-------------------------------|-------------------------------|--------------------------------|
| | | | 1.50 mm ² L [m] | 2.50 mm ² L [m] | 4.00 mm ² L [m] | 6.00 mm ² L [m] | 10.00 mm ² L [m] |
| S503X-AG0084 | 1.6 | 22 | 815 | 1360 | – | – | – |
| S503X-AG0084 | 2.5 | 34 | 525 | 880 | – | – | – |
| S503X-AG0084 | 4 | 55 | 325 | 540 | 870 | – | – |
| S503X-AG0084 | 6 | 83 | 215 | 360 | 575 | 865 | – |
| S503X-AG0084 | 9 | 124 | 145 | 240 | 385 | 580 | 965 |
| S503X-AG0084 | 20 | 275 | 65 | 110 | 175 | 260 | 435 |
| S503X-AG0084 | 32 | 440 | – | 70 | 110 | 160 | 270 |
| S503X-AG0084 | 52 | 715 | – | – | – | 100 | 170 |
| S503X-AG0084 | 63 | 865 | – | – | – | 80 | 140 |

Properties

Special features of F500



2CC04E502F001

F500-K: RCD with motor protection

The F500-K is an overcurrent breaker with motor protection characteristic. The residual current protection release is effective with sinusoidal alternating and pulsating DC fault current (Type A, according to IEC 60947-2, Annex B).

The high performance breaker F500-K ensures special protection in high power networks against:

- Dangerous residual currents at excessive contact voltage by physical contact
- Overheating of electrical operating equipment (motors) by overcurrent
- Overload and short-circuit

Convincing: High rated operating voltage up to 690 VAC

Safe: No thermal release required on contactor

Loads: Switching of all poles in event of a fault

F500S...0.3 S: Selective RCD with overload protection

The delayed RCD circuit breaker also bears the symbol S in addition to its type designation. The F500S...0.3 S selective residual current circuit breakers ensure selectivity with respect to following sensitive RCD circuit breakers. F500S...0.3S selective residual current circuit breakers are only used for material protection.

Subsequent short-time delayed G-types also behave selectively if connected after a F500S...0.3 S.

Capacitive discharge currents accompanied by high current peaks can be caused by:

- Long line capacitances
- Large number of fluorescent lamps (particularly when using electronic ballast units)
- Electronic equipment and components (PC terminals, PLCs, voltage converters, etc.)
- Transient network overvoltages

Convincing: High rated operating voltage up to 400/690 VAC

Safe: High rated breaking capacity, 50 kA at 230/400 VAC


Loads: Clear contact position indication for all poles

Checked: RCD pulsating DC sensitivity
(Type A, according to IEC 60947-2, Annex B)

Flexible: Available with various rated tripping current

Overview accessory


Accessory for breakers

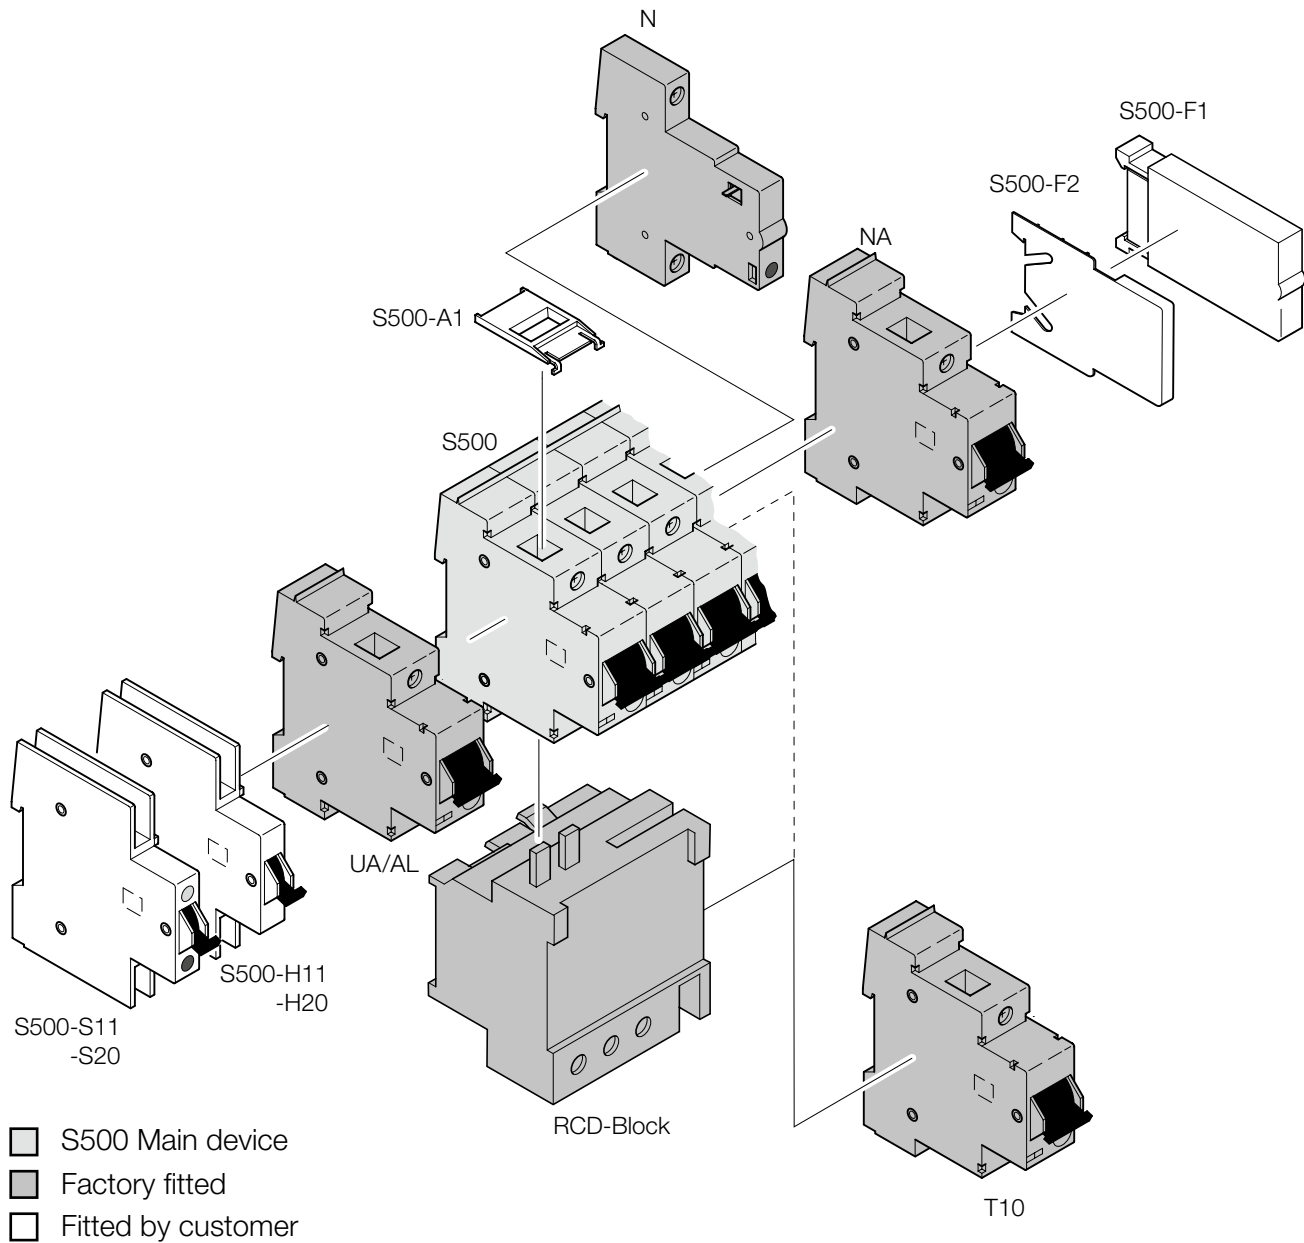

2100083.eps

Overview accessory

Common accessory

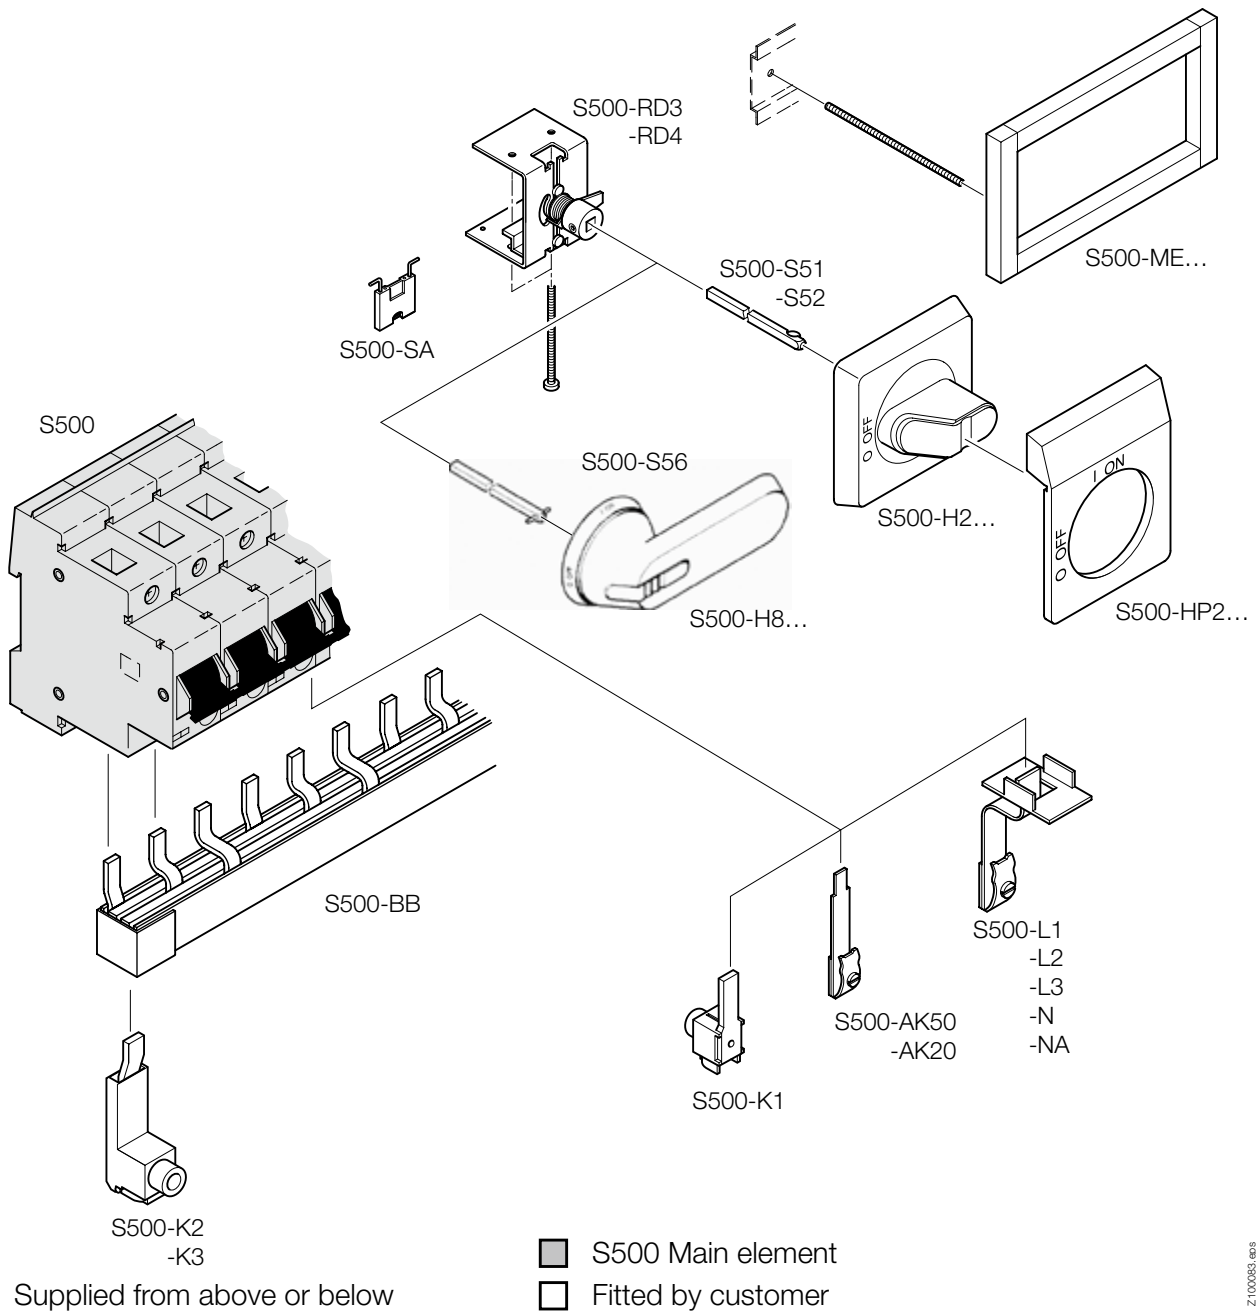

Properties Accessories



S500-H11, -H20

Auxiliary contact

The auxiliary contact is for electrical display of the operating state of the high performance MCB S500. Both changeover contacts always switch simultaneously with the live conductor contact and detect the following operating states:

- Manual tripping
- Tripping due to thermal overload
- Tripping due to magnetic overload (short-circuit)

Mounting ability of the auxiliary contact S500-H11, -H20

The auxiliary contacts can be mounted at the left on the high performance MCB S500. Max. 2 auxiliary contacts can be fitted per high performance MCB S500.



S500-S11, -S20

Signal contact

The signal contact is used for electrical signaling of the operating state of the high performance MCB S500. Signal contact switches resp. detect following form of tripping:

- Tripping due to thermal overload
- Tripping due to magnetic overload (short-circuit)
- Residual current tripping
- Tripping by residual current release

Mounting ability of the signal contacts S500-S11, -S20

The signal contacts can be mounted at the left on the high performance MCB S500. Max. 1 signal contacts can be fitted per high performance MCB S500. When using auxiliary and signal contacts the auxiliary contact must first be snapped directly onto the circuit breaker S500.

On each circuit breaker can be fitted:

- 1 Auxiliary contact
- or 1 Signal contact
- or 2 Auxiliary contacts
- or 1 Auxiliary- and 1 signal contact

...NA

Switched neutral conductor

The switched neutral conductor switches simultaneously with the high performance MCB S500.

Mounting ability of the switched neutral conductor ...NA

The neutral conductor is be mounted by the factory at the right on the high performance MCB S500.

...N

Separating neutral conductor

The S500 high performance MCB is force-opened before actuating the separating neutral conductor.

Mounting ability of the separating neutral conductor ...N

The separating neutral conductor is be mounted by the factory at the right on the high performance MCB S500.



...+UA

Undervoltage release

The ...+UA undervoltage release can be used as an emergency-stop cut-as by use of suitable emergency stop buttons. The undervoltage release switches the power supply to the high performance MCB off in case of a failure or if the value falls below $0.7 \times U_n$. After tripping, the high performance MCB can be switched back on as soon as the voltage is over $0.85 \times U_n$.

Mounting ability of the undervoltage release ...+UA

The undervoltage release is be mounted by the factory at the left side of the high performance MCB S500.



...+AL

Shunt release

The ...+AL shunt opening release is for remote release of the S500 high performance MCB using an electrical impulse (no persistent command). Operation of the trigger is guaranteed at a voltage between 70% and 110% of the rated mains voltage U_n both for AC and DC.

Mounting ability of the shunt release ...+AL

The shunt release is be mounted by the factory at the left side of the high performance MCB S500.

T10

RCD release signal contact

The T10 opens when FI trips, and is used for displaying residual current tripping operations. Pressing test button T trips the F500. Signalling can be tested using the FI signal contact T10. When operated manually (ON/OFF), the FI signal contact does not display any tripping operation. If using an auxiliary and signal contact, the following tripping operations may be displayed:

- Tripping due to pressing test button T
- Tripping due to thermal overload
- Tripping due to a magnetic overload (short circuit)
- Tripping due to undervoltage releases or operating current releases
- Tripping due to residual current tripping operations

With the FI signal contact T10, the user has a further option at their disposal for detecting and differentiating between fault causes.

Application with FI signal contact T10

Signalling specific FI tripping operations in:

- Hospitals
- Industrial plants
- Laboratories
- Telecommunications
- Systems with a great demand for high current availability

Mounting ability of the RCD release signal contact T10

The RCD release signal contact is be mounted by the factory at the right side of the pole of the residual current circuit breaker F500.



2CCC413068F0001

S500-SA

Locking device

The locking device safely prevents unintentional switching on and off of the S500. Simply insert the lug of the locking device through the borehole on the high performance MCB S500 and lock with a padlock with lug diameter of max 4mm (not included in delivery). Even when the high performance MCB S500 is secured with an locking device against unintentional switching off, tripping remains possible in case of overload or short-circuit by the undervoltage- and shunt release.



2CCC425007F0001

S500-RD3

Rotary drive

The rotary drive for 1-3 pole or 4-6 pole devices can be delivered for assembly on the switching field door. To the rotary drive are various rotary handles and a pistol grip available. The rotary handles avoid the switching-on of the high performance MCB S500. They could be locked in OFF position and the door lock takes place in ON position except of S500-H2B2 and S500-H2Y2 they permit the opening of the cabinet door.

- Spindle for rotary drive
 - (85 mm) S500-S51
 - (180 mm) S500-S52
- Spindle for pistol grip
 - (265 mm) S500-S56
- Pistol grip S500-H8B, -H8Y
- Rotary drive S500-H2B2, -H2Y2, H2B1, -H2Y1
- Name plate S500-HP2B, -HP2Y



2CCC425017F0001

S500 Busbar terminal

Busbar terminals are used for powering live conductors arranged vertically or horizontally. Individual devices can be replaced at a later stage without tripping the busbars.

Max. connection cross-section are:

- Round conductor 50 mm² oder 16 mm²
- Square 36 mm² oder 20 mm²
- Flat copper 6 x 20 mm oder 5 x 10 mm



2CCC425012F0001

S500-K1 Terminal, insulated

The insulated terminal is for rear connection of the main contacts. The connection cross-section is max. 25 mm² for copper cable or strand.



2CCC425020F0001

S500 Busbar system

The S500 busbar system is comprised of:

- Busbar
- End cape
- Line terminal, insulated

The comb-shaped busbar is used for powering horizontally arranged live conductors.

In addition to the comb-shaped busbar, the system incorporates the insulating cover and end caps.

The max. rated operational voltage U_n is 400/690 V a.c.

Conductor cross-section is 35 mm². The power can be supplied from centre or from the side – for supply from centre, 250 A is the maximum. For supply from the side, 125 A is the maximum. The S500-BB44 comb-shaped busbar is for 4 x 4-pin switches with separate neutral conductor bar, and can be used for 3-pin switches with auxiliary and/or signal contact.

The S500-EK end cap is used as contact protection after cutting the busbars to length.

The line terminal is intended either for 2 and 3-pin S500-K2 or 4-pin S500-K3 comb-shaped busbars.



2CCC425010F0001



2CCC425019F0001



2CCC425011F0001

Flush-mounting

The flush-mounting is for fitting in front panel or door.

- | | |
|----------|------------------------|
| S500-ME1 | insertion width 38 mm |
| S500-ME2 | insertion width 88 mm |
| S500-ME3 | insertion width 184 mm |



2CCC425034F0001

S500-A1 Terminal cover

The terminal cover is for insulation the connecting terminal according to IP40.



2CCC425022F0001

Intermediate piece

The intermediate piece is for compensating the unit widths of 18 mm.

- | | |
|---------|--------------|
| S500-F1 | 12,5 mm wide |
| S500-F2 | 6 mm wide |

Rated short-circuit breaking capacity I_{cn}

Compliant to EN 60898-1

The maximum current which a switching device can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated ultimate short-circuit braking capacity I_{cu}

Compliant to EN 60947-2

Ultimate short-circuit breaking capacity that a circuit breaker can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated service short-circuit breaking capacity I_{cs}

Compliant to EN 60947-2

Service short-circuit breaking capacity that a circuit breaker can switch off without damage at a rated operational voltage and rated operational frequency. It is specified as an effective value.

Rated insulation voltage U_i

The rated insulation voltage (U_i) is the voltage to which dielectric checks and creepage distances refer.

The maximum rated operational voltage must not exceed its rated insulation voltage.

Rated impulse withstand voltage U_{imp}

Peak of a withstand voltage of a specified form and polarity with which the circuit can be loaded under specified test conditions without a breakdown and to which clearances relate. The rated impulse withstand voltage must be equal to or greater than the values of the withstand over-voltages (transient overvoltages) which occur in the System in which the device is used.

Backup protection

Assignment of two overcurrent protective devices in series, where the protective device, generally but not necessarily on the supply side, effects the overcurrent protection with or without the assistance of the other protective device and prevents excessive stress on the latter [IEC 60947-1, definition 2.5.24].

Total selectivity

Overcurrent discrimination where, in the presence of two overcurrent protective devices in series, the protective device on the load side effects the protection without causing the other protective device to operate [IEC 60947-2, definition 2.17.2].

Partial selectivity

Overcurrent discrimination where, in the presence of two overcurrent protective devices in series, the protective device on the load side effects the protection up to a given level of overcurrent, without causing the other protective device to operate [IEC 60947-2, definition 2.17.3].

Table of content S500

Technical data

| | |
|--------------------------------|-----|
| S500-K | 8/2 |
| S500UC/S500HV | 8/4 |
| S500X-AG1499 | 8/5 |
| S500X-AG0084 | 8/6 |
| F500 | 8/7 |
| Internal resistance/Power loss | 8/8 |
| Accessories | 8/9 |

230 V Let-through energies

| | |
|--------|------|
| S500-K | 8/10 |
| S500HV | 8/12 |

Technical data

S500-K

| | | S500 | |
|--|-----------------|--|---------------|
| | | K | |
| Characteristics | | | |
| Rated continuous current I_n adjustable | A | 0.1 ... 45 | |
| Poles | | 1, 2, 3+N, NA ^{1,2} | |
| Rated operating voltage U_e | V | AC 400/690 | |
| Rated insulation voltage U_i | V | AC 690 | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | |
| Ultimate short-circuit breaking capacity I_{cu} compliant to 60947-2 | | 0.1 ... 11A | 10 ... 45A |
| AC 230/400V | kA | 50 | 30 |
| AC 250/440V | kA | 30 | 25 |
| AC 3 x 500V | kA | 20 | 15 |
| AC 400/690V | kA | 6 | 6 |
| Service short-circuit breaking capacity I_{cs} compliant to 60947-2 | | 0.1 ... 11A | 10 ... 45A |
| AC 230/400V | kA | 30 | 25 |
| AC 250/440V | kA | 22 | 22 |
| AC 3 x 500V | kA | 15 | 11 |
| AC 400/690V | kA | 3 | 3 |
| Rated short-circuit breaking capacity I_{cs} compliant to UL1077 and CSA-C22.2 No. 35 | | ≤ 25A | > 25A ... 45A |
| AC 240/415V | kA | 30 | 18 |
| AC 277/480V | kA | 14 | 14 |
| AC 346/600V | kA | 6 | 6 |
| Rated frequency | Hz | 50/60 | |
| Mounting position | | any | |
| Disconnecter properties compliant to IEC 60947-2 | | yes | |
| Standards | | IEC 60947-2 UL 1077 CAN/CSA-C22.2 No. 35 | |
| Connections C_u | mm ² | 1 ... 25 | |
| Tightening torque | Nm | 2.5 | |
| Feed AC | | any | |
| Permissible operating ambient temperature | C | -25 ... +55 | |
| Protection category | | IP20 | |
| Mech. lifetime | | > 20 000 switching cycles | |
| Climatic strength | | DIN 50016 | |

¹ N = for separating neutral isolation

² NA = switched neutral



Technical data

S500-K

Adjustable version

| Rated current I_n [A] | S500-K | Power loss* P_V [W] |
|----------------------------|--|--------------------------|
| | Internal resistance/Pole R_i [Ω] | |
| 0.1–0.15 | 78 | 1.76 |
| 0.14–0.21 | 48 | 2.12 |
| 0.2–0.3 | 23.5 | 2.12 |
| 0.28–0.42 | 12.3 | 2.17 |
| 0.38–0.58 | 6.6 | 2.22 |
| 0.53–0.8 | 3.5 | 2.24 |
| 0.73–1.1 | 2.0 | 2.42 |
| 1–1.5 | 1.05 | 2.36 |
| 1.4–2.1 | 0.68 | 3.00 |
| 2–3 | 0.35 | 3.15 |
| 2.8–4.2 | 0.175 | 3.09 |
| 3.8–5.8 | 0.095 | 3.20 |
| 5.3–8 | 0.055 | 3.52 |
| 7.3–11 | 0.035 | 4.24 |
| 10–15 | 0.023 | 5.18 |
| 14–20 | 0.012 | 4.80 |
| 18–26 | 0.008 | 5.41 |
| 23–32 | 0.0055 | 5.63 |
| 29–37 | 0.0035 | 4.79 |
| 34–41 | 0.0025 | 4.20 |
| 38–45 | 0.0017 | 3.44 |

Internal resistance and power losses concerning the ambient temperature

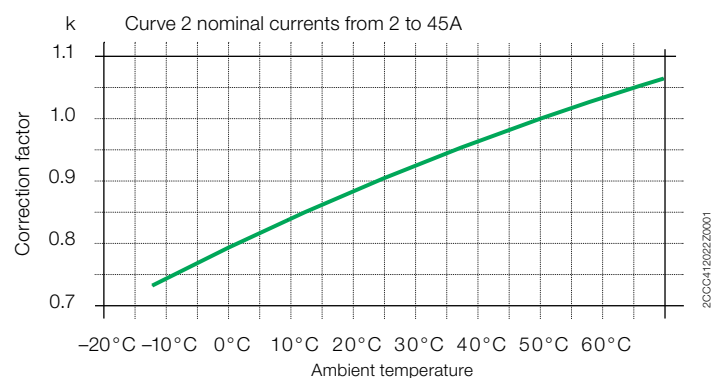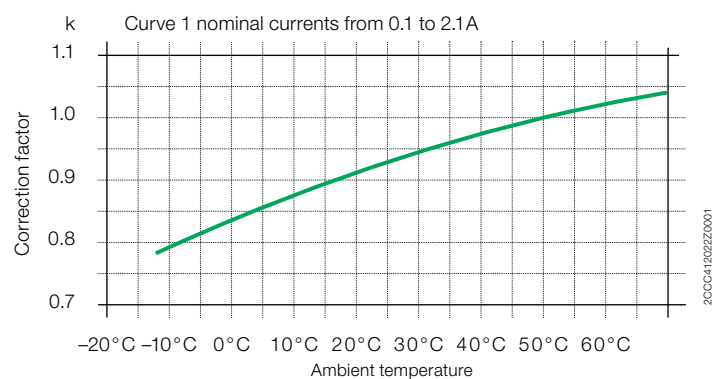

Example:
 Motor 2.2 kW; $I_e = 5\text{ A}$ at 380 V a.c. for 0°C ambient temperature
 High performance circuit breaker S500-K 3.8 ... 5.3 A
 According to curve 2 correction factor $k = 0.84$
 Current setting on S500-K breaker: $k \times I_e = 0.84 \times 5\text{ A} = 4.2\text{ A}$

Technical data

S500UC/S500HV

| | | S500UC |
|---|-----------------|---|
| | | K |
| Characteristics | | |
| Rated continuous current I_n adjustable | A | 0.1 ... 45 |
| Poles | | 1 ... 4 |
| Rated operating voltage U_e (DC/Pol) | V | DC 250 / per pole max. DC 750 / 3 poles in serie |
| Rated insulation voltage U_i | V | DC 1000 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Ultimate short-circuit breaking capacity I_{cu} compliant to 60497-2 | | |
| (DC) 250 V L/R 15 ms (1-pole) | kA | 30 |
| (DC) 500 V L/R 15 ms (2-pole) | kA | 30 |
| (DC) 750 V L/R 15 ms (3-pole) | kA | 30 |
| (DC) 750 V L/R 15 ms (4-pole) | kA | 30 |
| Rated short-circuit breaking capacity compliant to UL1077 and CSA | | |
| (DC) 250 V (1-pole) | kA | 30 |
| (DC) 500 V (2 poles in series) | kA | 30 |
| (DC) 600 V (3 and 4 poles in series) | kA | 30 |
| Mounting position | | any |
| Disconnecter properties compliant to IEC 60947-2 | | yes |
| Standards | | IEC 60947-2 UL 1077 CAN/CSA-C22.2 No. 35 |
| Connections C_u | mm ² | 1 ... 25 |
| Tightening torque | Nm | 2.5 |
| Feed | | any |
| Permissible operating ambient temperature | °C | -25 ... +55 |
| Protection category | | IP20 |
| Mech. lifetime | | > 20 000 switching cycles |
| Climatic strength | | DIN 50016 |
| Approvals | | UL1077 File E167556 |

| | | S500HV |
|--|-----------------|--------------------|
| | | K |
| Characteristics | | |
| Rated continuous current I_n | A | 1 ... 45 |
| Poles | | 1 ... 3 |
| Trip class of thermal release | | Class 10 A |
| Rated operating voltage U_e | V | AC 580 / 1000 |
| Rated insulation voltage U_i | V | AC 1000 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Ultimate short-circuit breaking capacity I_{cu} / I_{cs} compliant to 60947-2 | | |
| (AC) 580/1000 V | kA | 1.5 |
| Rated frequency | Hz | 50/60 |
| Permissible operating ambient temperature | °C | -25 ... +55 |
| Climatic resistance | | DIN 50016 |
| Protection category | | IP40 |
| Plastic | | halogen-free |
| Disconnecter properties compliant to IEC 60947-3 | | yes |
| Standards | | IEC 60947-2, SEMKO |
| Mounting position | | any |
| Connections C_u | mm ² | 1 ... 25 |
| Tightening torque | | 2.5 |
| Feed AC | | any |

Technical data

S500X-AG1499

| | | S500X-AG1499 | |
|---|-----------------|---------------------------|---------------|
| Rated continuous current I_n adjustable | A | 0.1 ... 45 | |
| Poles | | 1 ... 3 | |
| Rated operating voltage U_e | V | AC 400/690 | |
| Rated insulation voltage U_i | V | AC 690 | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | |
| Ultimate short-circuit breaking capacity I_{cu} compliant to 60947-2 | | 0.1 ... 11A | 10 ... 45A |
| AC 230/400V | kA | 50 | 30 |
| AC 250/440V | kA | 30 | 25 |
| AC 3x500V | kA | 20 | 15 |
| AC 400/690V | kA | 6 | 6 |
| Service short-circuit breaking capacity I_{cs} compliant to 60947-2 | | 0.1 ... 11A | 10 ... 45A |
| AC 230/400V | kA | 30 | 25 |
| AC 250/440V | kA | 22 | 22 |
| AC 3x500V | kA | 15 | 11 |
| AC 400/690V | kA | 3 | 3 |
| Rated short-circuit breaking capacity I_{cc} compliant to UL1077 and CSA 22.2 No. 35 | | ≤ 25A | > 25A ... 45A |
| AC 240/415V | kA | 30 | 18 |
| AC 277/480V | kA | 14 | 14 |
| AC346/600V | kA | 6 | 6 |
| Rated frequency | Hz | | 50/60 |
| Mounting position | | any | |
| Disconnecter properties compliant to IEC 60947-3 | | yes | |
| Connections C_u | mm ² | 1 ... 25 | |
| Tightening torque | Nm | 2.5 | |
| Feed AC | | any | |
| Permissible operating ambient temperature | °C | -25 ... +55 | |
| Protection category | | IP20 | |
| Mech. lifetime | | > 20 000 switching cycles | |
| Climatic strength | | DIN 50016 | |
| Standards | | IEC 60947-2 | |
| | | UL 1077 | |
| | | CAN/CSA-C22.2 No. 35 | |
| Approvals | | UL 1077 | |
| | | File E167556 | |

Technical data

S503X-AG0084

| | | S503X-AG0084 |
|---|-----------------|---------------------------|
| Rated continuous current I_n | A | 0.8 ... 63 |
| Poles | | 3+N ¹ |
| Rated operating voltage U_e | V | AC 230/400 |
| Rated insulation voltage U_i | V | AC 690 |
| Rated impulse withstand voltage U_{imp} | kV | 6 |
| Ultimate short-circuit breaking capacity I_{cu} compliant to 60947-2 | kA | 50 |
| Service short-circuit breaking capacity I_{cs} compliant to 60947-2 | kA | 25 |
| Rated frequency | Hz | 50/60 |
| Mounting position | | any |
| Disconnecter properties compliant to IEC 60947-2 | | yes |
| Standards | | IEC 60947-2 |
| Connections C_u | mm ² | 1 ... 25 |
| Tightening torque | Nm | 2.5 |
| Feed AC | | any |
| Permissible operating ambient temperature | °C | -25 ... +55 |
| Protection category | | IP20 |
| Mech. lifetime | | > 20 000 switching cycles |
| Climatic strength | | DIN 50016 |

¹ N = separating neutral isolation

Technical data

F500

| | | F500 | |
|--|-----------------|---------------------------|------------|
| | | K | |
| Characteristics | | | |
| Rated continuous current I_n | A | 0.2 ... 45 | |
| Rated residual operating current $I_{\Delta n}$ | A | 0.01 / 0.03 / 0.3 | |
| with short-term delay | A | 0.03 | |
| selective | A | 0.3 | |
| Pole | | 2 ... 4 | |
| Rated operating voltage U_e 50/60 Hz | | | |
| (AC) 50/60 Hz | V | AC 400, 500, 690 | |
| Rated insulation voltage U_i | V | AC 690 | |
| Rated short-circuit breaking capacity I_{cs} nach EN/IEC 60898-1 | | | |
| AC 230/400V | kA | 25 | |
| Service short-circuit capacity I_{cs} nach EN/IEC 60898-1 | | | |
| AC 230/400V | kA | 12.5 | |
| Ultimate short-circuit breaking capacity I_{cu} compliant to 60947-2 | | | |
| | | 0.2 ... 11A | 10 ... 45A |
| AC 230/400V | kA | 50 | 30 |
| AC 250/440V | kA | 30 | 25 |
| AC 3x500V | kA | 20 | 15 |
| AC 400/690V | kA | 6 | 6 |
| Service short-circuit breaking capacity I_{cs} compliant to 60947-2 | | | |
| | | 0.2 ... 11A | 10 ... 45A |
| AC 230/400V | k | 30 | 25 |
| AC 250/440V | kA | 22 | 22 |
| AC 3x500V | kA | 15 | 11 |
| AC 400/690V | kA | 3 | 3 |
| Rated frequency | Hz | 50/60 | |
| Mounting position | | any | |
| Disconnecter properties compliant to IEC 60947-2 | | yes | |
| Standards | | IEC 60947-2 | |
| Connections C_u | mm ² | 1 ... 25 | |
| Tightening torque | Nm | 2.5 | |
| Feed AC | | any | |
| Permissible operating ambient temperature | °C | -25 ... +40 | |
| Protection category | | IP20 | |
| Mech. lifetime | | > 10 000 switching cycles | |
| Climate strength | | IEC 60068-2-30 | |

Power loss/Internal resistance per pole

Fixed version/adjustable version

Fixed version

| Rated current I_n [A] | S500X-AG0084 | |
|----------------------------|---|-------------------------|
| | Internal resistance/Pole R_i [m Ω] | Power loss P_v [W] |
| 1.6 | 950 | 2.43 |
| 2.5 | 500 | 3.13 |
| 4 | 195 | 3.12 |
| 6 | 90 | 3.24 |
| 9 | 45 | 3.65 |
| 20 | 12 | 4.8 |
| 32 | 5.5 | 5.63 |
| 52 | 1.7 | 4.6 |
| 63 | 1.7 | 6.75 |

Adjustable version

| Rated current I_n [A] | S500-K | | S500UC-K | | S500X-AG1499 | | F500-K | |
|----------------------------|--|-------------------------|--|-------------------------|--|-------------------------|--|-------------------------|
| | Internal resistance/pole R_i [Ω] | Power loss P_v [W] | Internal resistance/pole R_i [Ω] | Power loss P_v [W] | Internal resistance/pole R_i [Ω] | Power loss P_v [W] | Internal resistance/pole R_i [Ω] | Power loss P_v [W] |
| 0.1-0.15 | 78 | 1.76 | 84 | 1.89 | 78 | 1.76 | | |
| 0.14-0.21 | 48 | 2.12 | 51 | 2.25 | 48 | 2.12 | | |
| 0.2-0.3 | 23.5 | 2.12 | 25.5 | 2.30 | 23.5 | 2.12 | | |
| 0.28-0.42 | 12.3 | 2.17 | 12.8 | 2.26 | 12.3 | 2.17 | 12.4 | 2.19 |
| 0.38-0.58 | 6.6 | 2.22 | 7.0 | 2.35 | 6.6 | 2.22 | 6.7 | 2.25 |
| 0.53-0.8 | 3.5 | 2.24 | 3.6 | 2.30 | 3.5 | 2.24 | 3.6 | 2.30 |
| 0.73-1.1 | 2.0 | 2.42 | 2.04 | 2.47 | 2.0 | 2.42 | 2.1 | 2.54 |
| 1-1.5 | 1.05 | 2.36 | 1.08 | 2.43 | 1.05 | 2.36 | 1.1 | 2.48 |
| 1.4-2.1 | 0.68 | 3.00 | 0.68 | 3.00 | 0.68 | 3.00 | 0.73 | 3.22 |
| 2-3 | 0.35 | 3.15 | 0.35 | 3.15 | 0.35 | 3.15 | 0.3507 | 3.16 |
| 2.8-4.2 | 0.175 | 3.09 | 0.175 | 3.09 | 0.175 | 3.09 | 0.1757 | 3.10 |
| 3.8-5.8 | 0.095 | 3.20 | 0.095 | 3.20 | 0.095 | 3.20 | 0.0957 | 3.22 |
| 5.3-8 | 0.055 | 3.52 | 0.055 | 3.52 | 0.055 | 3.52 | 0.0557 | 3.56 |
| 7.3-11 | 0.035 | 4.24 | 0.035 | 4.24 | 0.035 | 4.24 | 0.0357 | 4.32 |
| 10-15 | 0.023 | 5.18 | 0.023 | 5.18 | 0.023 | 5.18 | 0.0237 | 5.33 |
| 14-20 | 0.012 | 4.80 | 0.012 | 4.80 | 0.012 | 4.80 | 0.0127 | 5.08 |
| 18-26 | 0.008 | 5.41 | 0.008 | 5.41 | 0.008 | 5.41 | 0.0087 | 5.88 |
| 23-32 | 0.0055 | 5.63 | 0.005 | 5.12 | 0.0055 | 5.63 | 0.0062 | 6.35 |
| 29-37 | 0.0035 | 4.79 | 0.0035 | 4.79 | 0.0035 | 4.79 | 0.0042 | 5.75 |
| 34-41 | 0.0025 | 4.20 | 0.0025 | 4.20 | 0.0025 | 4.20 | 0.0032 | 5.38 |
| 38-45 | 0.0017 | 3.44 | 0.0017 | 3.44 | 0.0017 | 3.44 | 0.0024 | 4.86 |

Technical data

Accessories

Electrical properties



| Auxiliary- and signal contact | | |
|---|-----------------|--|
| Utilisation categories compliant to 60947-5-1 | | AC15 230V/2A AC15 400V/1A DC13 250V/0.5A |
| Utilisation categories compliant to 60947-4-1 | | AC1 400V/6A |
| Ratings compliant to UL1077 | | 120 VAC 3A 240 VAC 1.5A 480 VAC 6A 125 VDC 0.5A 12 VDC 10 mA |
| Thermal continuous current I_{th} | A | 6 |
| Rated operating voltage U_e | V | AC 690 |
| Rated operating voltage U_e nach UL1077 | V | AC 480 |
| Connections | mm ² | 2 x 2.5 mm ² solid, 2 x 1.5 mm ² flexible with core, (screw connection Pozidrive size 2) |
| Tightening torque | Nm | 0.8 |
| Approvals | | SEV, cUR, UR |
| Standards | | IEC 60947-5-1, UL1077 |


| RCD release signal contact T10 | | |
|---|-----------------|--|
| Utilisation categories compliant to 60947-5-1 | | AC15 230 V/2A AC15 400V/1A DC13 250V/0.5A DC13 24V/10mA |
| Utilisation categories compliant to 60947-4 | | AC1 400V/6A |
| Connections | mm ² | 1 ... 25 |
| Tightening torque | Nm | 2.5 |
| Standards | | IEC 60947-5-1 |

| Undervoltage release UA | | |
|-----------------------------------|-----------------|-----------------------|
| Rated operating voltage U_e | VAC/DC | 12, 24, 110, 230, 400 |
| Operating range | % U_e | 50 ... 110 |
| Power loss of coil when attracted | W/VA | max. 130 |
| Connections C_u | mm ² | 1 ... 25 |
| Tightening torque | Nm | 2.5 |
| Standards | | IEC 60947-1 UL1077 |


| Shunt release AL | | |
|-----------------------------------|-----------------|-----------------------|
| Rated operating voltage U_e | VAC/DC | 12, 24, 110, 230, 400 |
| Operating range | % U_e | 50 ... 110 |
| Power loss of coil when attracted | W/VA | max. 130 |
| Connections C_u | mm ² | 1 ... 25 |
| Tightening torque | Nm | 2.5 |
| Standards | | IEC 60947-1 UL1077 |

Let-through energies S500-K

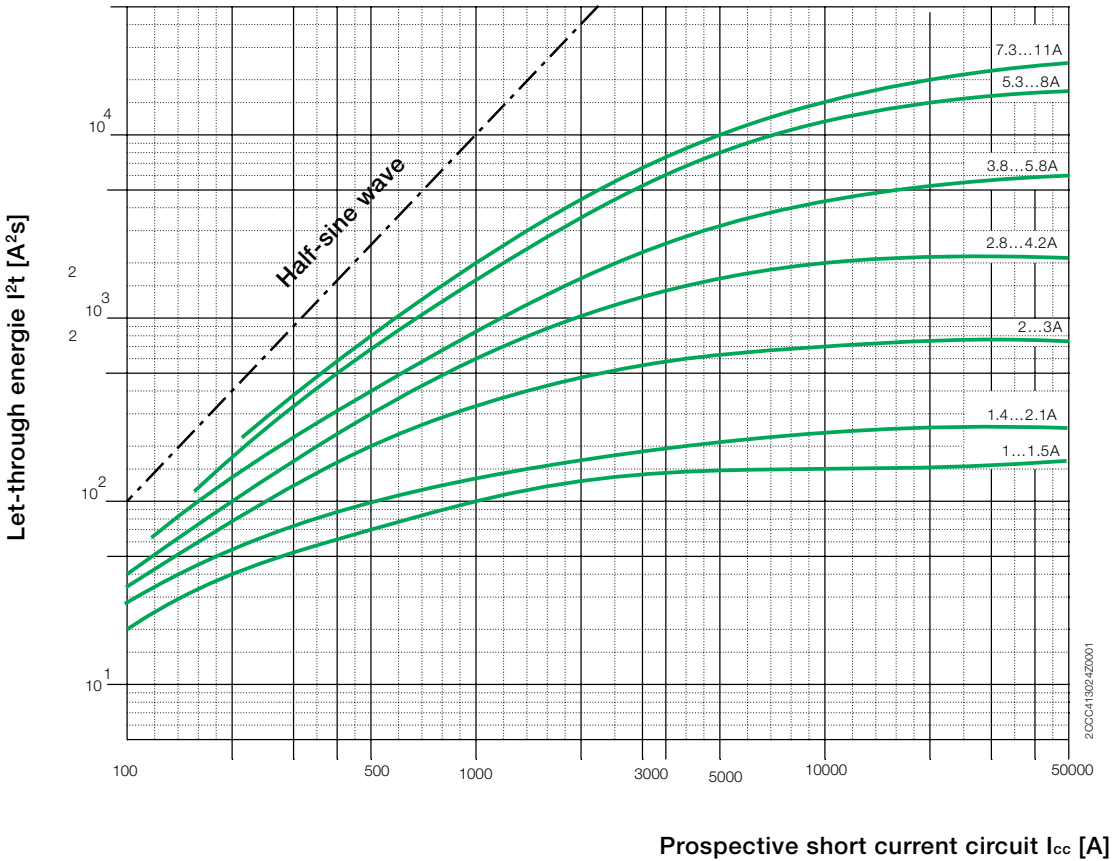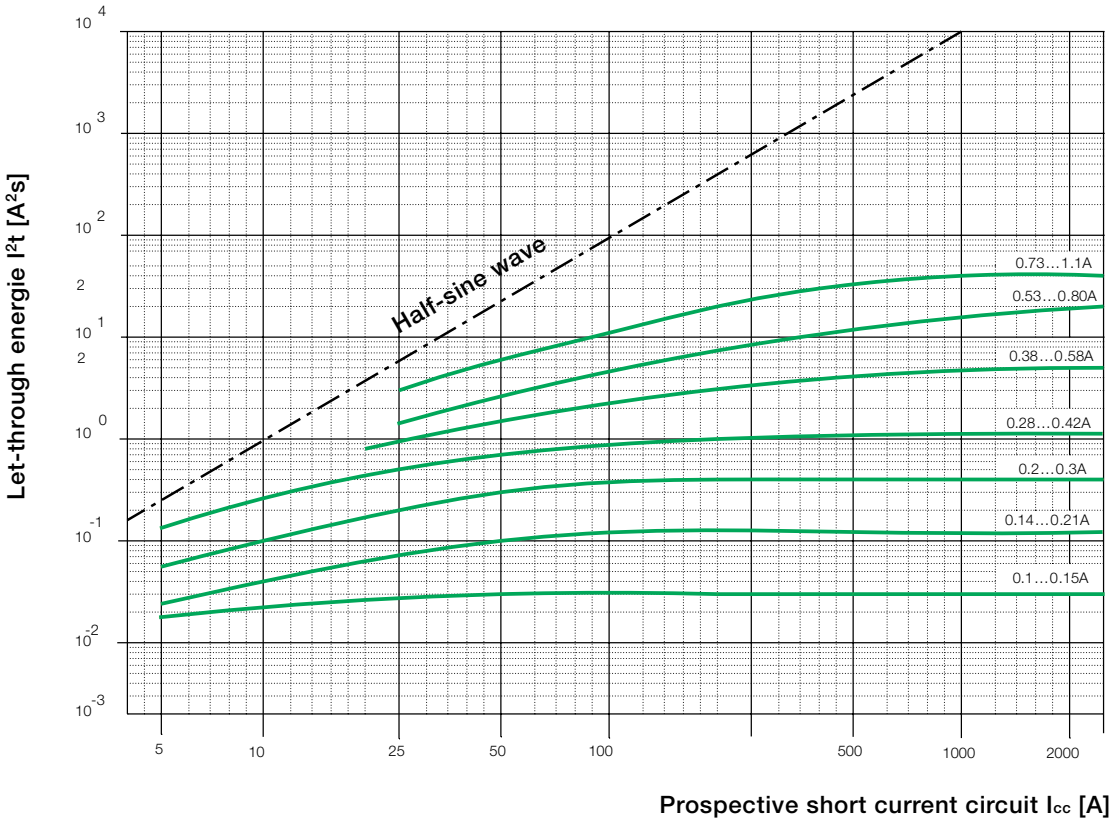

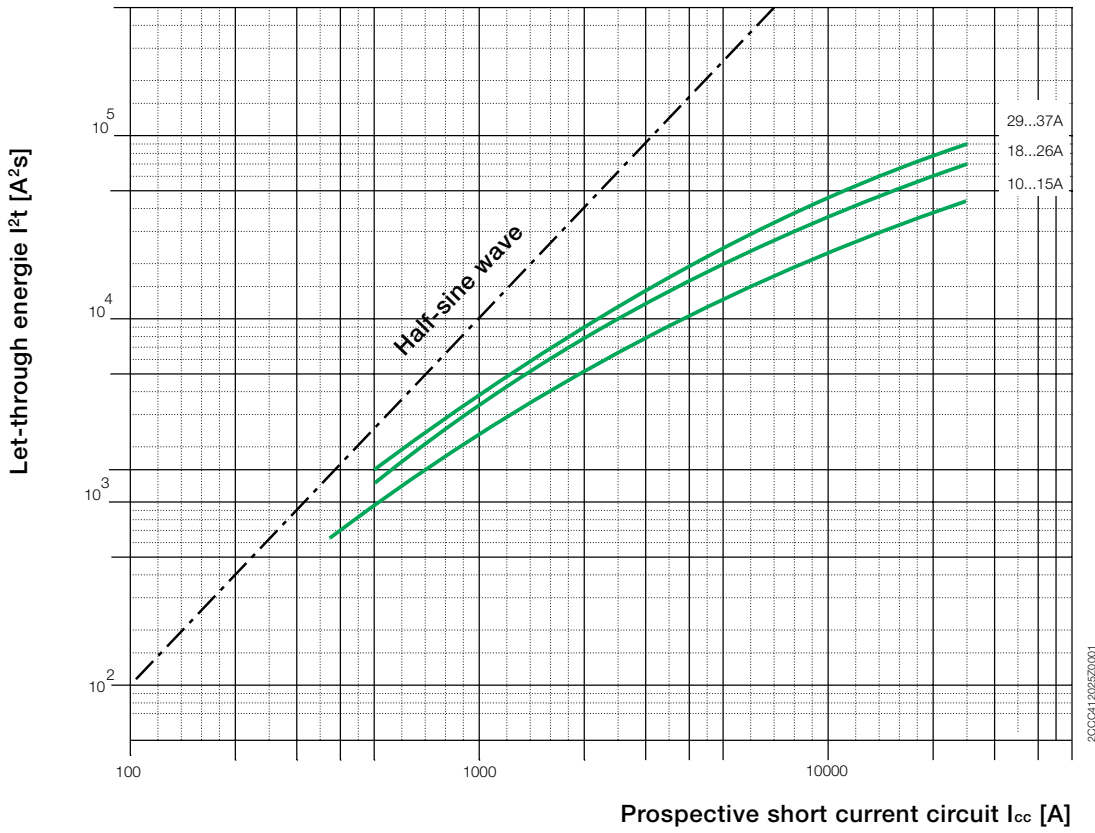

2CCC41.2025Z0001

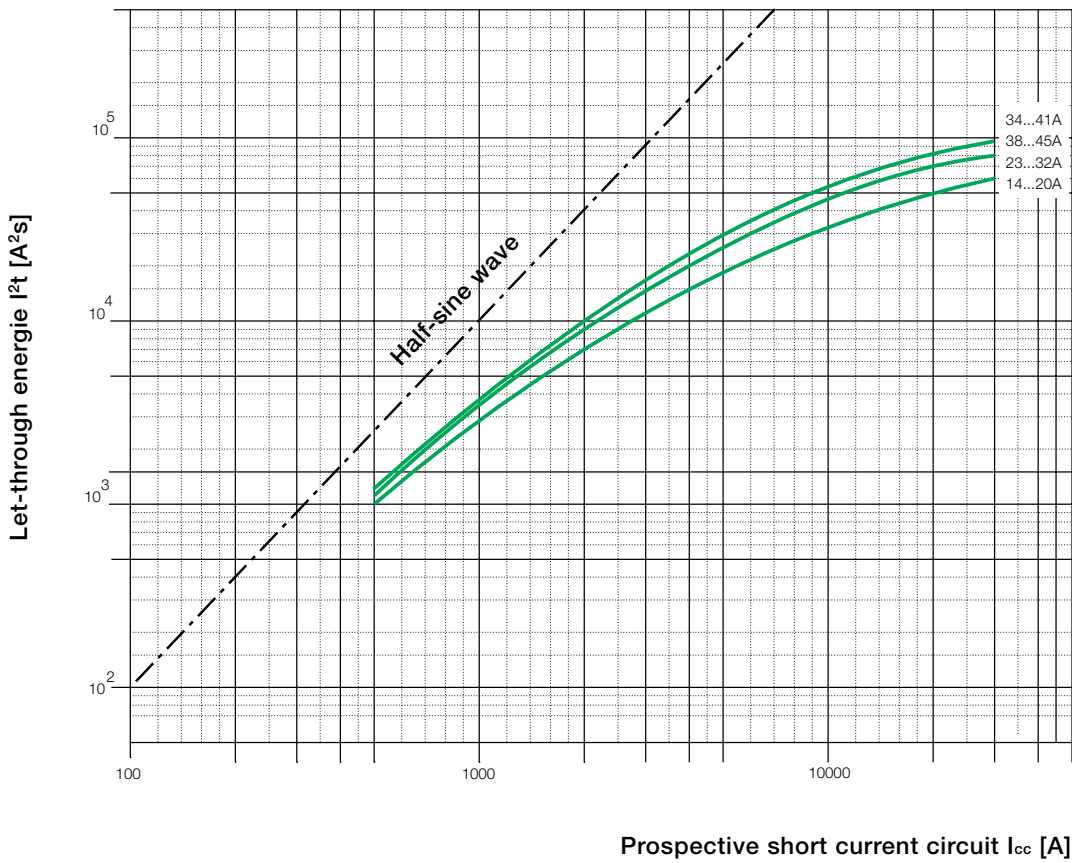

2CCC41.19028Z0001

Let-through energies S500HV

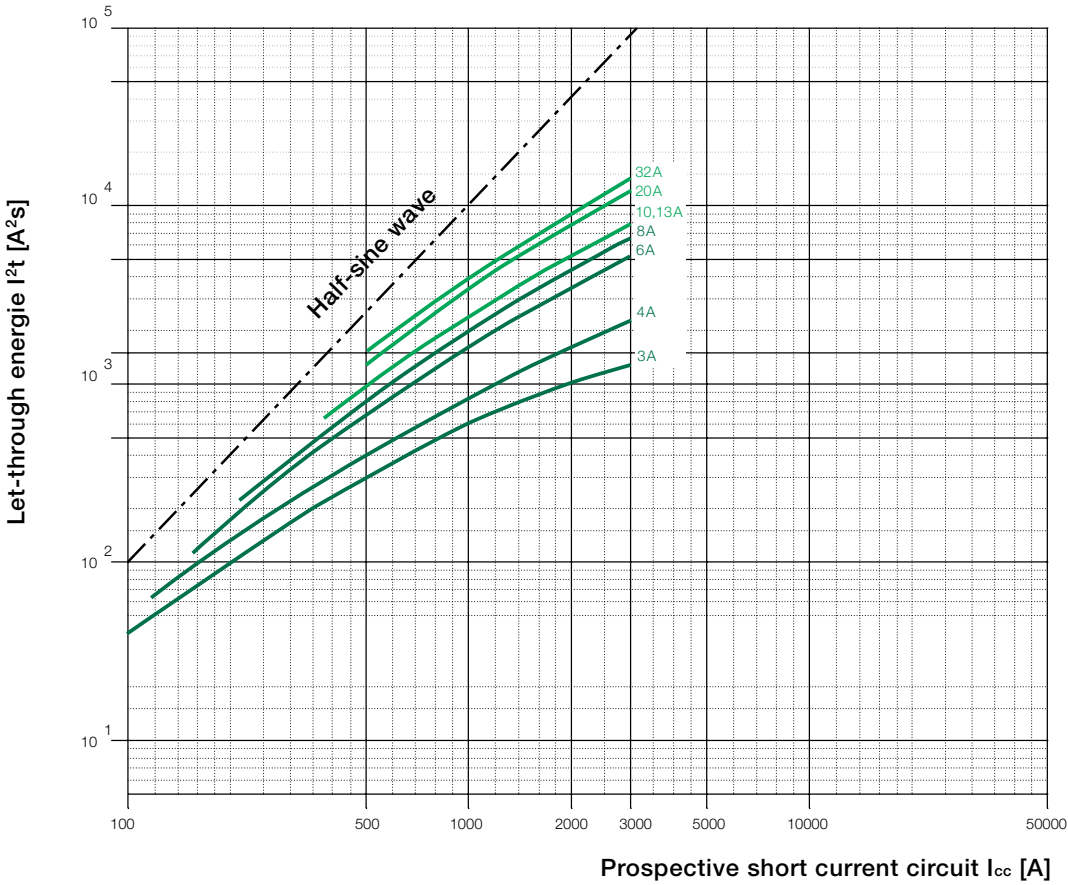
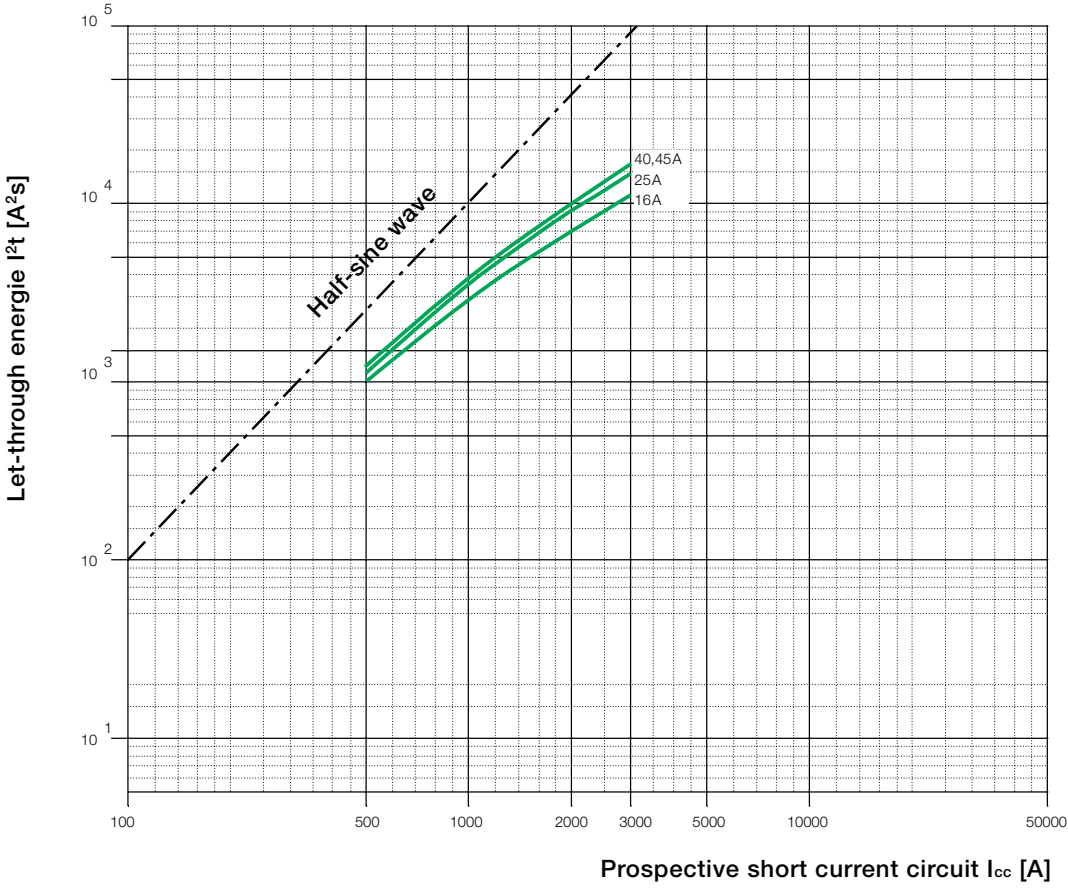


Table of content S500

Pole dimensions

| | |
|--------------|-----|
| S500-K, X | 9/2 |
| S500UC-K, HV | 9/2 |
| F500K | 9/2 |


Dimensions of accessories

| | |
|--|-----|
| S500-H11, -H20 | 9/3 |
| S500-S11, -S20 | 9/3 |
| ...N, ...NA | 9/4 |
| ...+UA, ...+AL | 9/4 |
| Rotary handle | 9/4 |
| Pistol grip | 9/4 |
| S500-RD +, S500-S51, S500-S52 +, Rotary handle | 9/4 |
| Busbar | 9/5 |
| Busbar terminal | 9/5 |


Pole dimensions

High performance MCB

S500-K, X

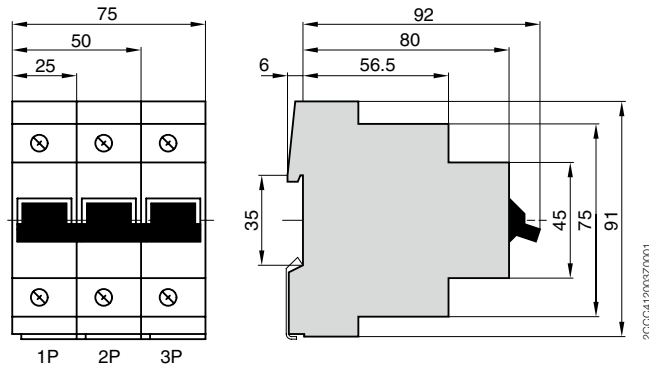


S500UC-K, HV

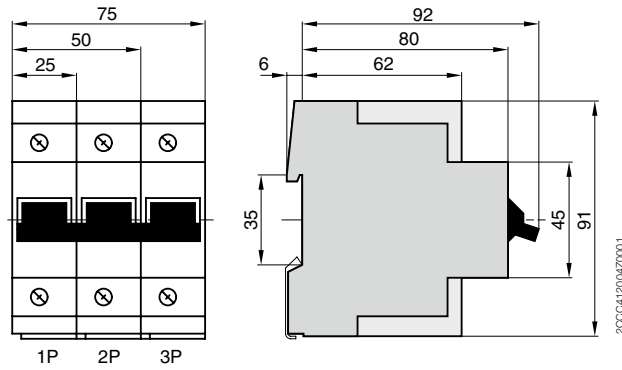

9

F500K

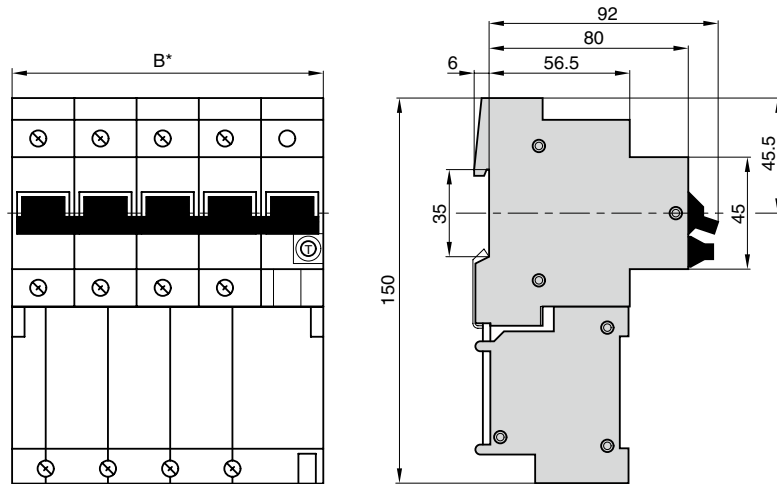



| Type designation | *Dim. in mm |
|------------------|-------------|
| F503... | 100 |
| F504... | 125 |

Dimensions of accessories


Mounting clearances in mm

Mounting clearances in mm


| Dimension | To grounded parts, insulating covers or cable ducts | To bare, live parts where busbar clearance is 10 mm |
|-----------|---|---|
| A | 25 | 80 |
| B | 7 | 100 |
| C | 25 | 25 |

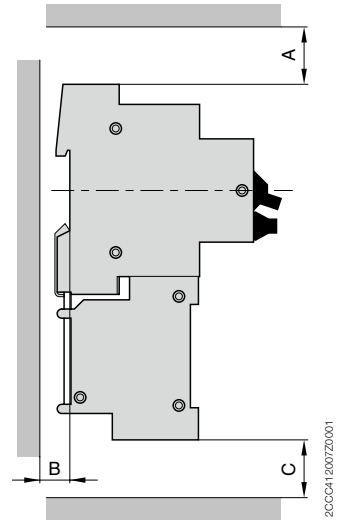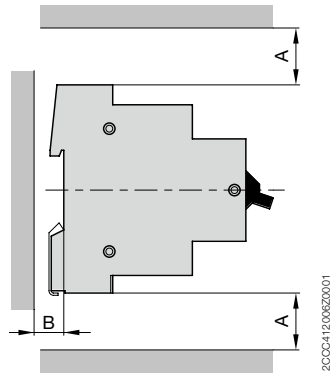

S500-H11
S500-H20

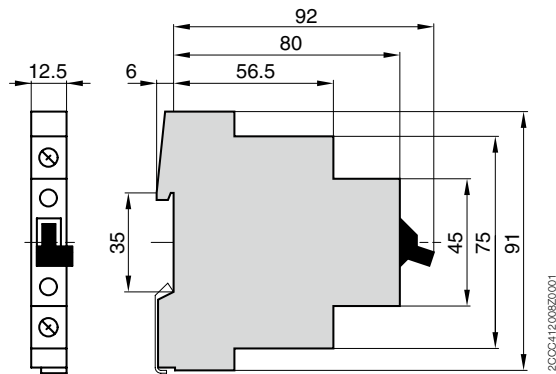


S500-S11
S500-S20

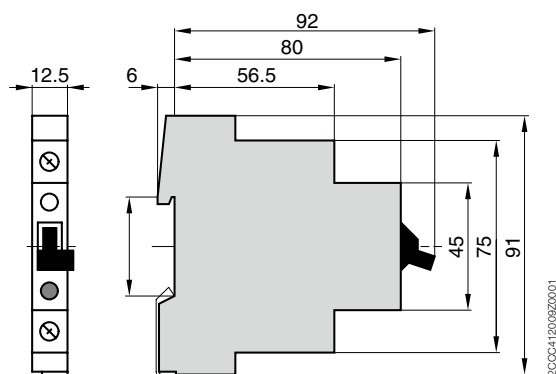


Dimensions of accessories

...N
...NA

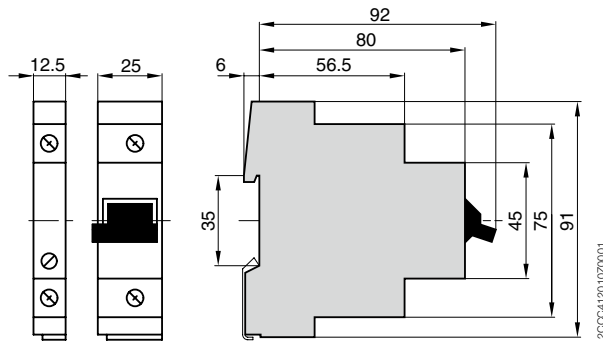

2CCC4120103Z0001


...+UA
...+AL

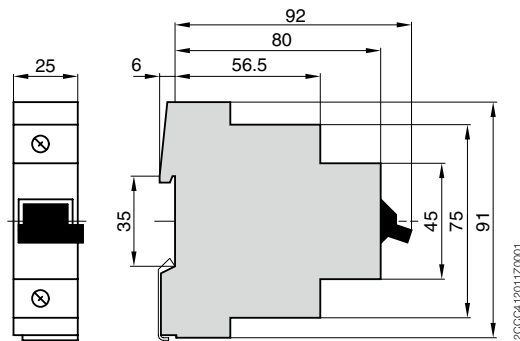

2CCC412011Z0001


9

Rotary handle

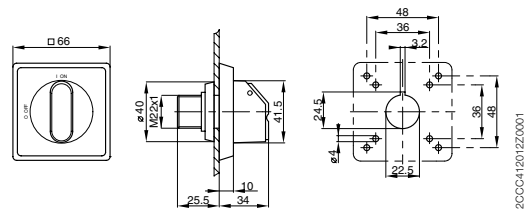


2CCC412012Z0001

Pistol grip

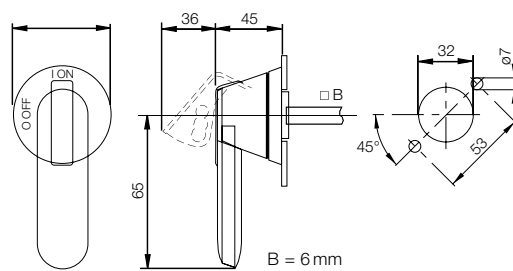


2CCC412013Z0001

S500-RD +
S500-S51
S500-S52 +
Rotary handle

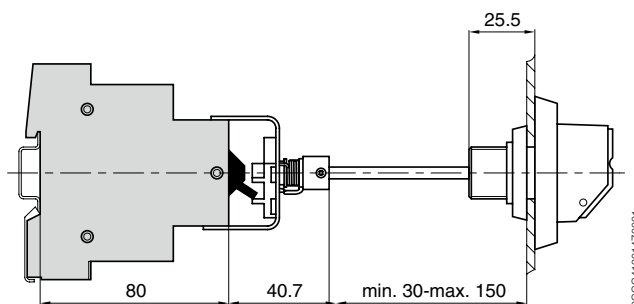


2CCC412014Z0001

Busbar

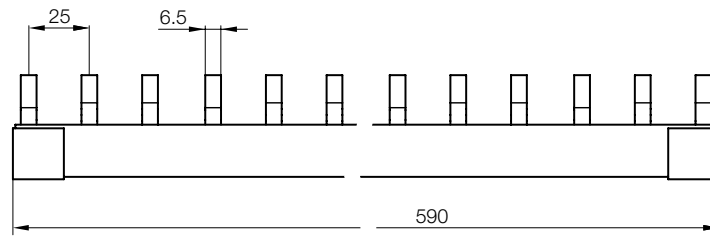


2CCC412015Z0001

Busbar terminal

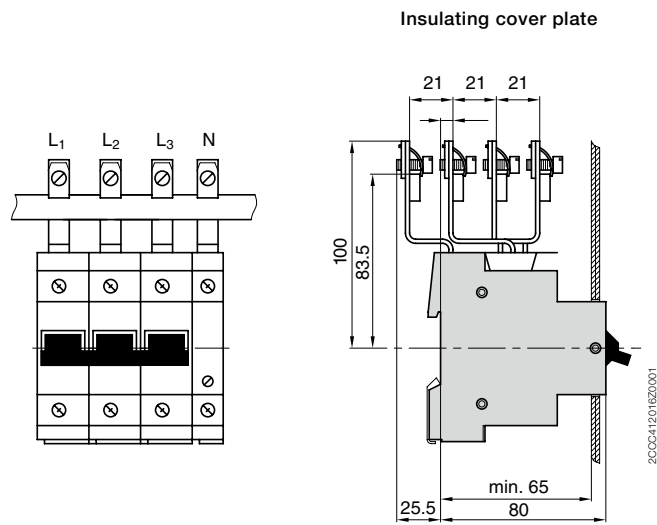

2CCC412016Z0001

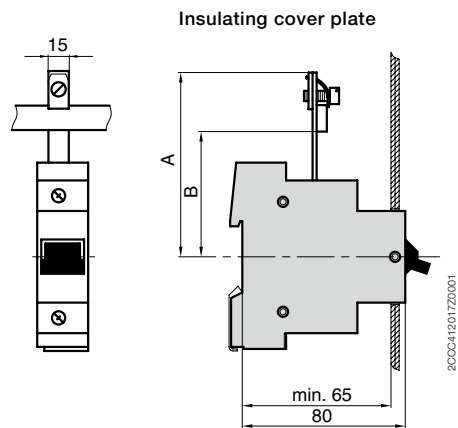






2CCC412017Z0001

| Busbar terminal | Dimension in mm | |
|-----------------|-----------------|------|
| | A | B |
| S500-AK50 | 91 | 71.5 |
| S500-AK20 | 67 | 47.5 |

Table of content S500

| | |
|--|------|
| Approvals and certifications S500..... | 10/2 |
|--|------|

Approbationen

| | China | US/ Canada | Russia | Marine | |
|-------------------------------|---|---|---|---|---|
| |  |  |  |  |  |
| S500 Main devices | | | | | |
| S500-K High performance MCB | ■ | ■ | ■ | | |
| S500UC-K High performance MCB | ■ | ■ | ■ | | |
| S500 accessories | | | | | |
| S500-H11, -H20 | | ■ | ■ | | |
| S500-S11, -S20 | | ■ | ■ | | |
| ...+UA Undervoltage release | | ■ | ■ | | |
| ...+AL Shunt release | | ■ | ■ | | |

- devices are approved
- devices have been submitted for approval or submission planned for device

Contact

Australia

ABB Australia Pty Limited
601 Blackburn Road
Notting Hill VIC 3168
Australia
Telephone +61 (0) 3 8544 0000
Telefax +61 (0) 3 8544 0001

www.au.abb.com

Belgium

ABB ELECTRO n.v.
Hoge Wei, 27
1930 Zaventem
Belgium
Telephone +32 (0) 27 18 63 11
Telefax +32 (0) 27 18 66 66

www.abb.be

Brasil

ABB Ltda
av. dos Autonomistas, 1496
06020-902-Osasco-SP
Brasil
Telephone +55 (0) 80 00 14 91 11
Telefax +55 (11) 36 88 99 77

www.abb.com.br

Czech Republic

ABB s.r.o.
Herspická 13
61900 Brno
Czech Republic
Telephone +420 54 31 45 50 3
Telefax +420 54 32 43 48 9

www.abb.cz/elsynn

Denmark

ABB AS
Meterbuen 33
2740 Skovlunde
Denmark
Telephone +45 44 50 44 50
Telefax +45 44 50 44 60

www.abb.dk

Finland

ABB OY
Domestic Sales
P.O. Box 182
00381 Helsinki
Finland
Telephone +358 10 22 20 00
Telefax +358 10 22 22 91 3

www.abb.fi

France

ABB Entrelec
Division Commercial France
300 rue des Prés Seigneurs
ZA La Boisse – BP 90145
01124 Montluel Cedex
France
Telephone +33 (0) 825 38 63 55
Telefax +33 (0) 825 87 09 26

www.abb.fr

ABB Switzerland Ltd.

Low Voltage Products
Brown Boveri Platz 3
CH-5400 Baden
Telefon +41 (0) 58 586 00 00
Telefax +41 (0) 58 586 06 01

www.abb.ch

Great Britain

ABB Limited
Tower Court
Foleshill Enterprise Park
Courtaulds Way
Coventry
CV6 5NX
England
Telephone +44 (0) 24 76 36 85 00
Telefax +44 (0) 24 76 36 44 99

www.abb.com/lowvoltage

India

ABB Limited
Plot Nos 5 & 6, 2nd Phase
Peenya Industrial Area
Bangalore 560 058
India
Telephone +91 80 2294 9150
Telefax +91 80 2294 9148

www.abb.co.in

Ireland

Asea Brown Boveri Ltd.
Belgrad Road, Tallaght
Dublin 24
Ireland
Telephone +35 31 40 57 30 0
Telefax +35 31 40 57 33 2

www.abb.com/lowvoltage

Netherland

ABB b.v.
Automation Products
Marten Meesweg 5
3068 AV Rotterdam
Postbus 301
3000 AH Rotterdam
Netherland
Telephone +31 (0) 10 40 78 91 1
Telefax +31 (0) 10 40 78 09 0

www.abb.nl

Norway

ABB AS Automation Technology
Products Division
P.O. Box 797 Brakeroya
3002 Drammen
Norway
Telephone +47 32 24 80 00
Telefax +47 32 24 79 34

www.abb.no

Poland

ABB Sp. z o.o.
Automation Products
ul. Zeganska 1
04-713 Warszawa
Poland
Telephone +48 22 51 64 441
Telefax +48 22 51 64 444

www.abb.pl

P.R. China

ABB (China) Ltd
Universal Plaza, 10 Jiuxianqiao Lu
Chaoyang District
100016 Beijing
P.R. China
Telephone +86 10 8456 6688
Telefax +86 10 8456 9907

www.abb.com.cn

Russian Federation

ABB Industrial & Building Systems Ltd.
30/1, bld. 2, Obrucheveva St.
117861 Moscow
Russia
Tel.: +7 495 960 2200
Fax: +7 495 960 2220

www.abb.ru/ibs

Singapore

ABB Pte Ltd
2 Ayer Rajah Crescent
Singapore 139935
Telephone +65 6776 5711
Telefax +65 6778 0222

www.abb.com.sg

Spain

ABB Automation Products, S.A.
c/Torrent de l'Olla 220
08012 Barcelona
Spain
Telephone +34 93 48 42 21
Telefax +34 93 48 42 190

www.abb.es

Sweden

ABB Automation
Technologies Cewe Control
Muturgråd 20
72161 Västerås
Sweden
Telephone +46 (0) 21 32 07 00
Telefax +46 (0) 21 12 60 01

www.abb.se

Ukraine

ABB Ltd, Ukraine
Automation Products Low Voltage
4, Ivana Lepse Blvd.
Kiev 67, 03680
Ukraine
Telephone +380 44 495 22 11
Telefax +380 44 495 22 10

www.abb.ua

United Arab Emirates

ABB Industries (L.L.C.)
P.O. Box 11070
Dubai
United Arab Emirates
Telephone +971 4 314 7500
Telefax +971 4 340 1771

www.mena.abb.com

In consideration of modification to standards and materials, the characteristics and overall dimensions indicated in this catalogue may be binding only following confirmation by ABB.